

D

C

B







A

D

C


B

A

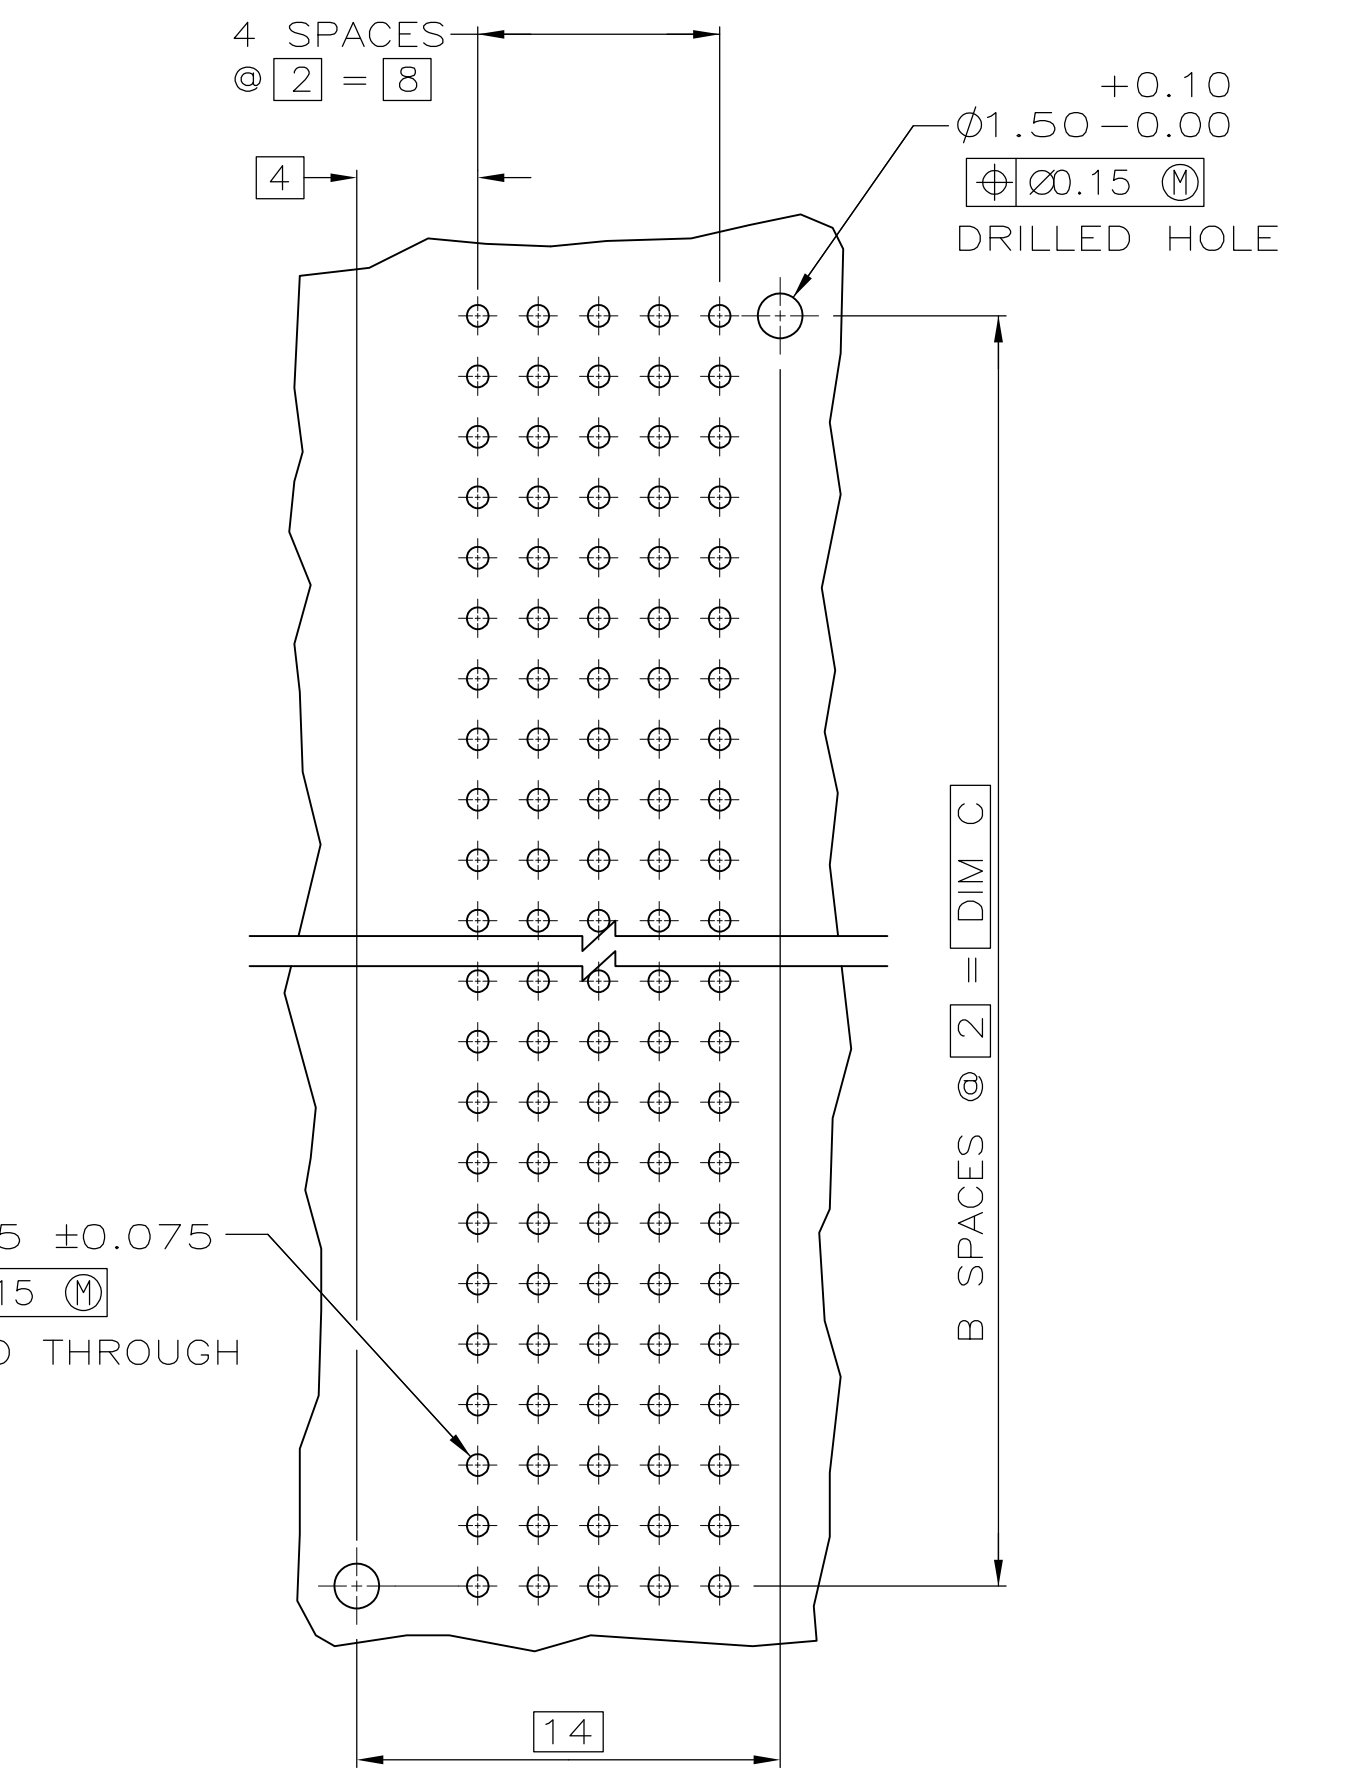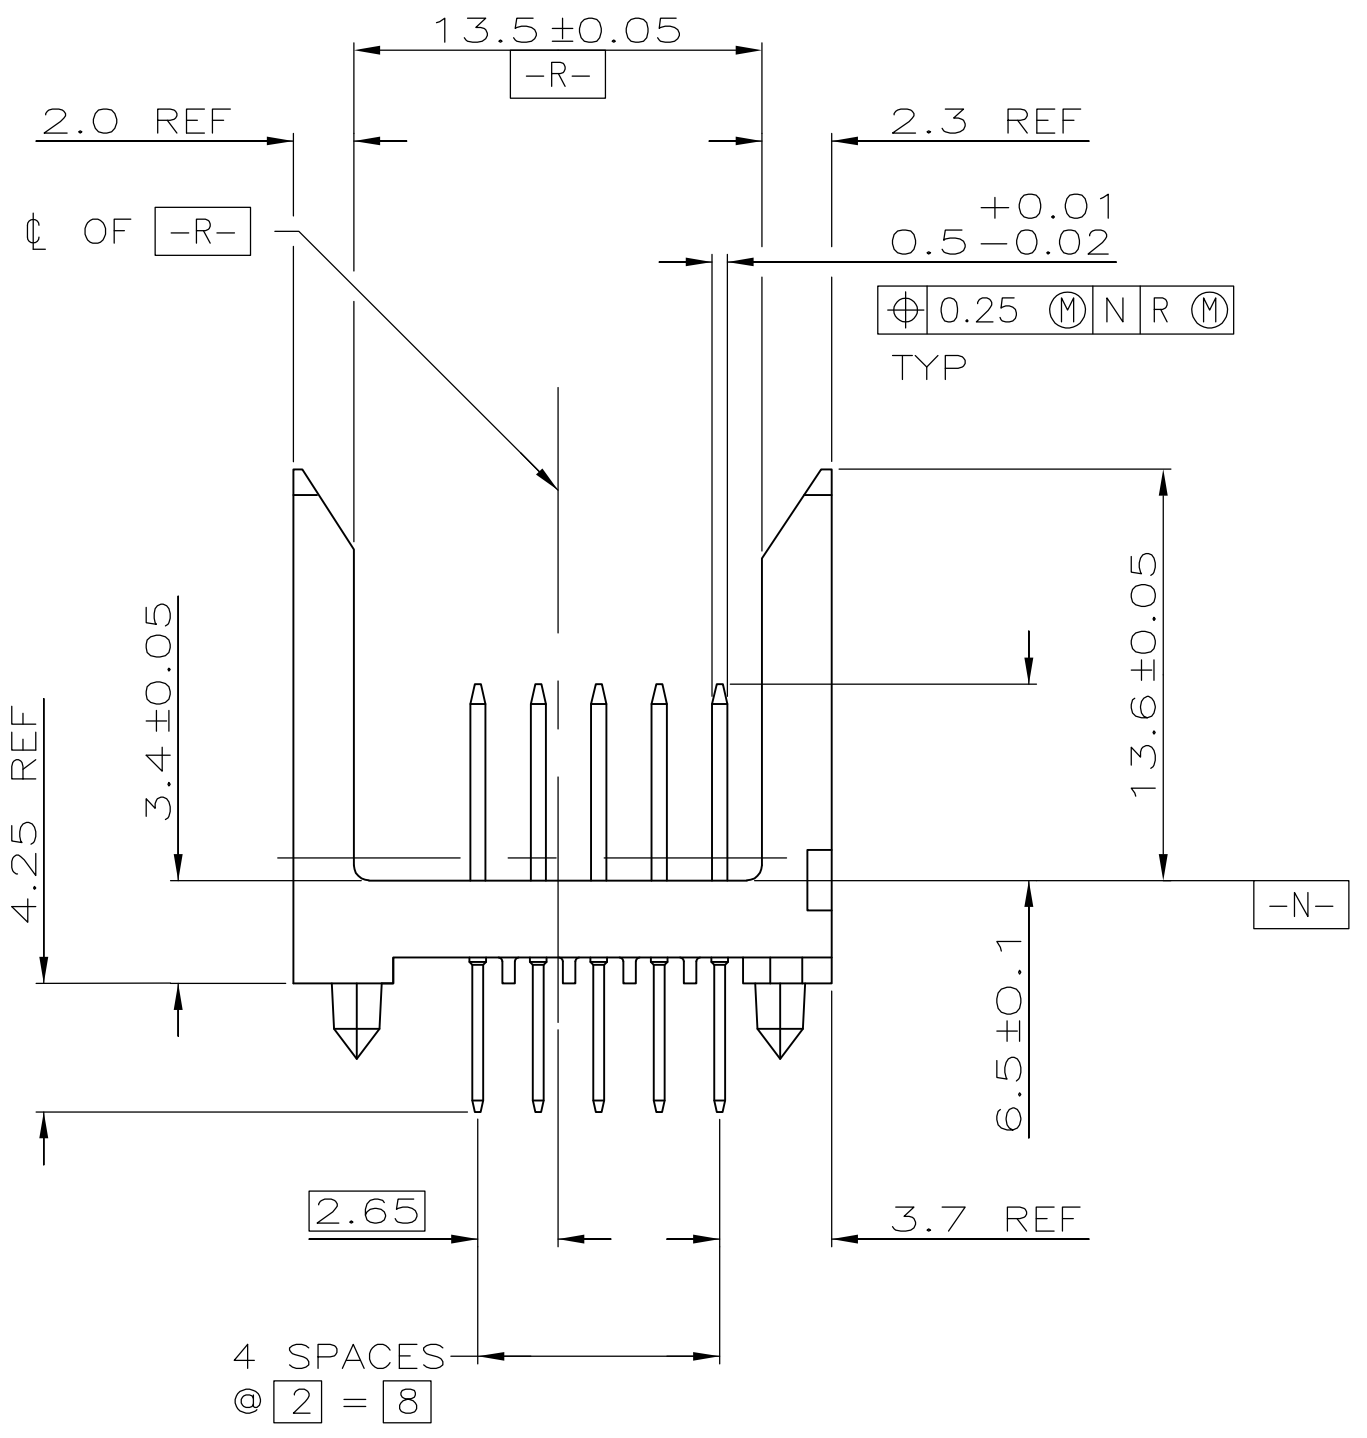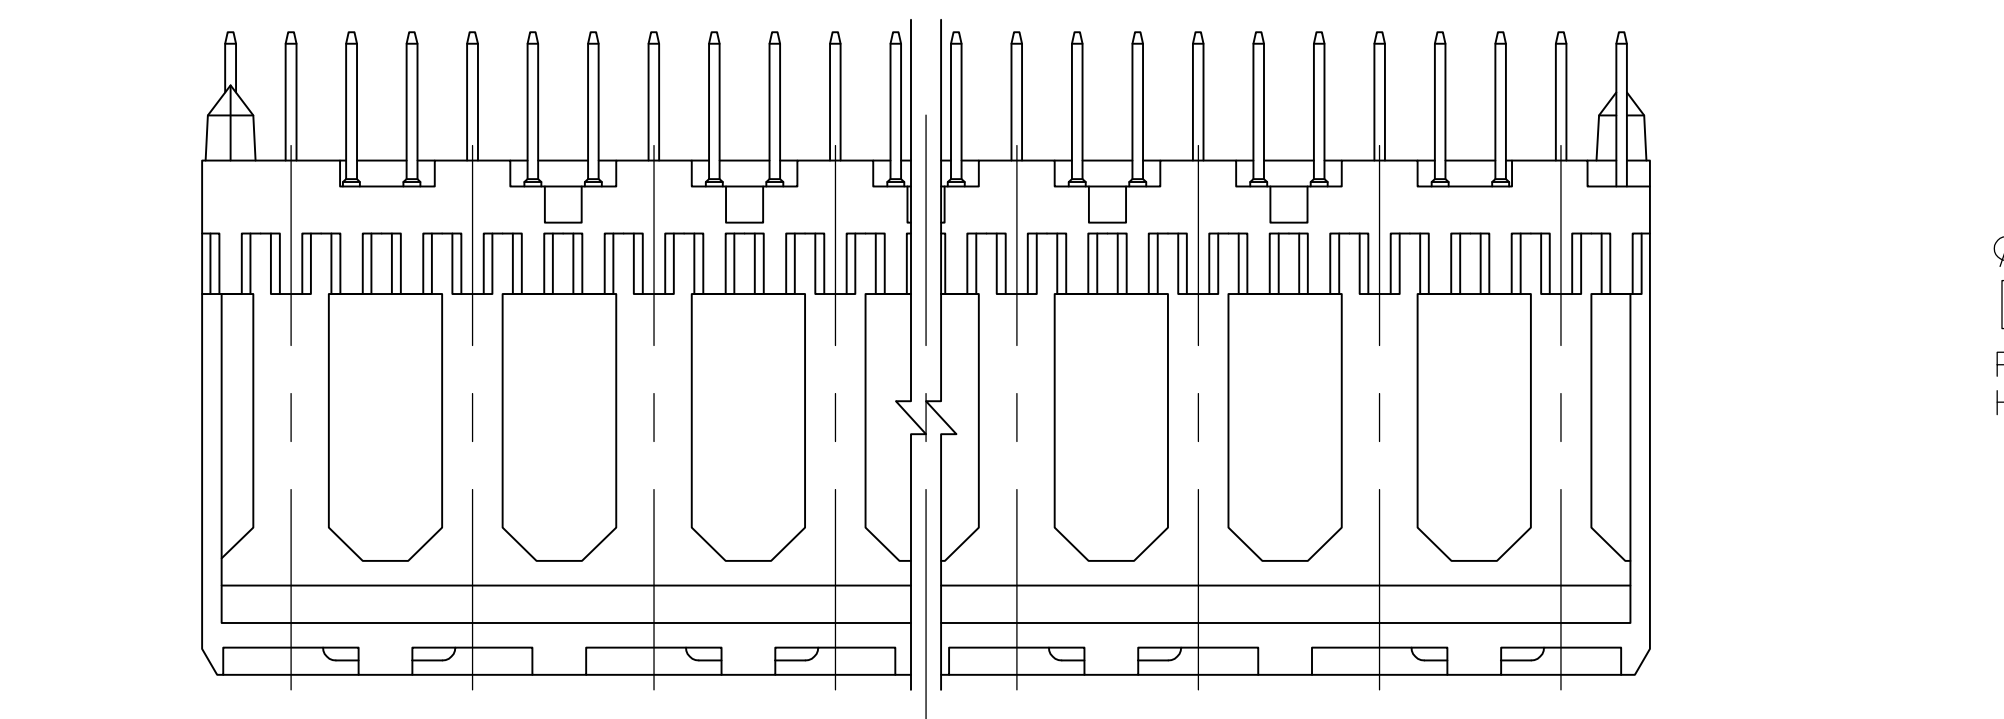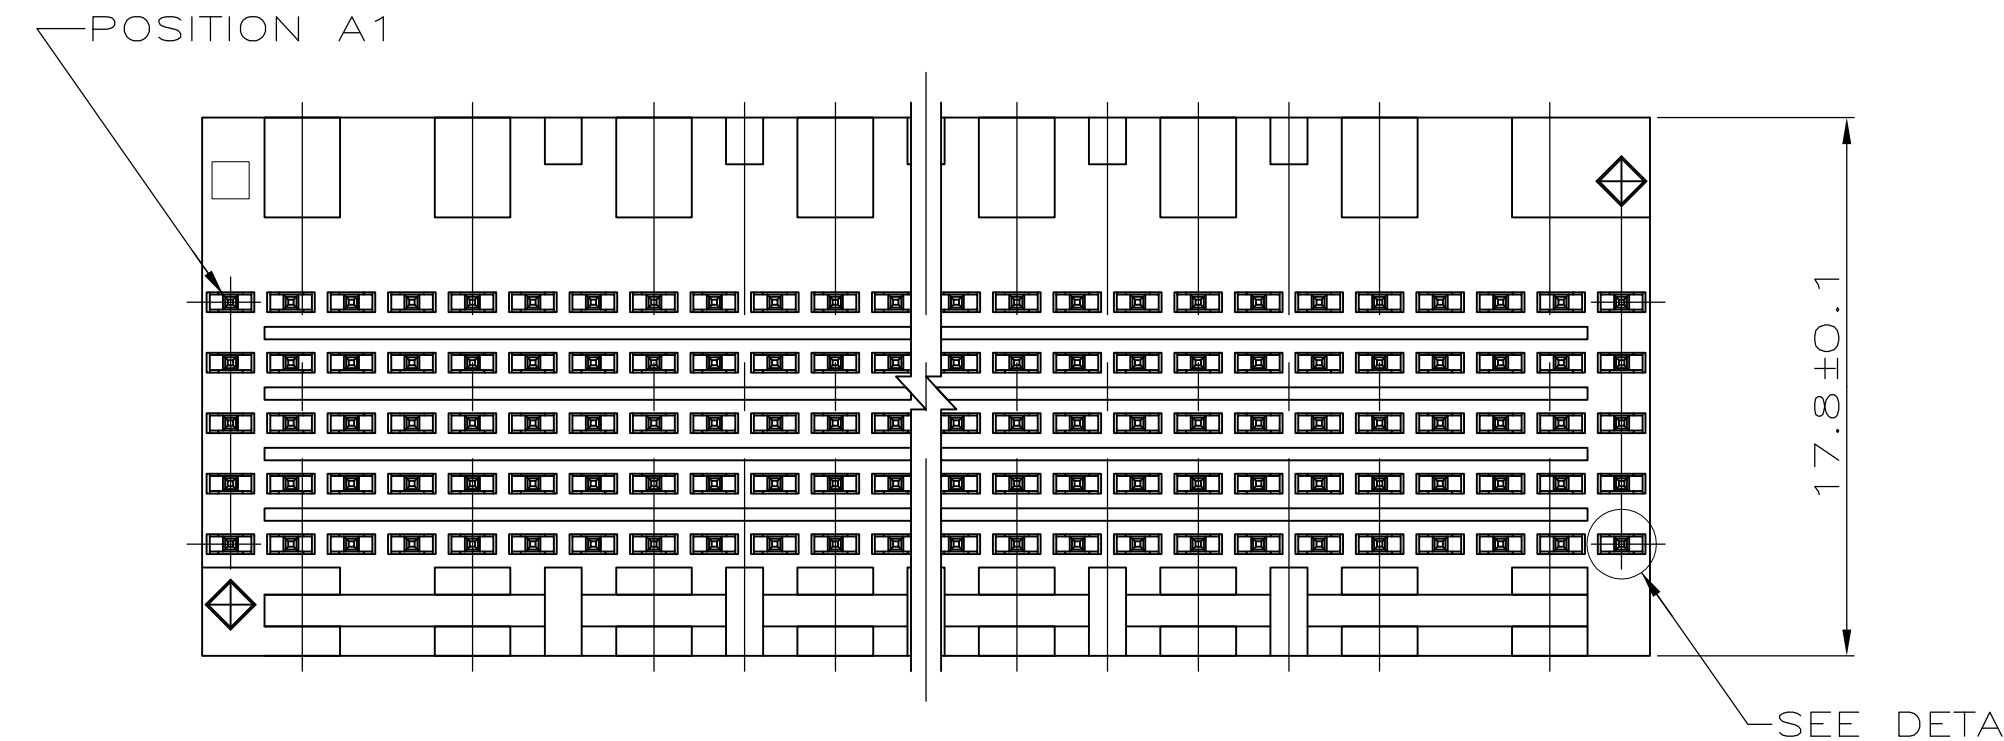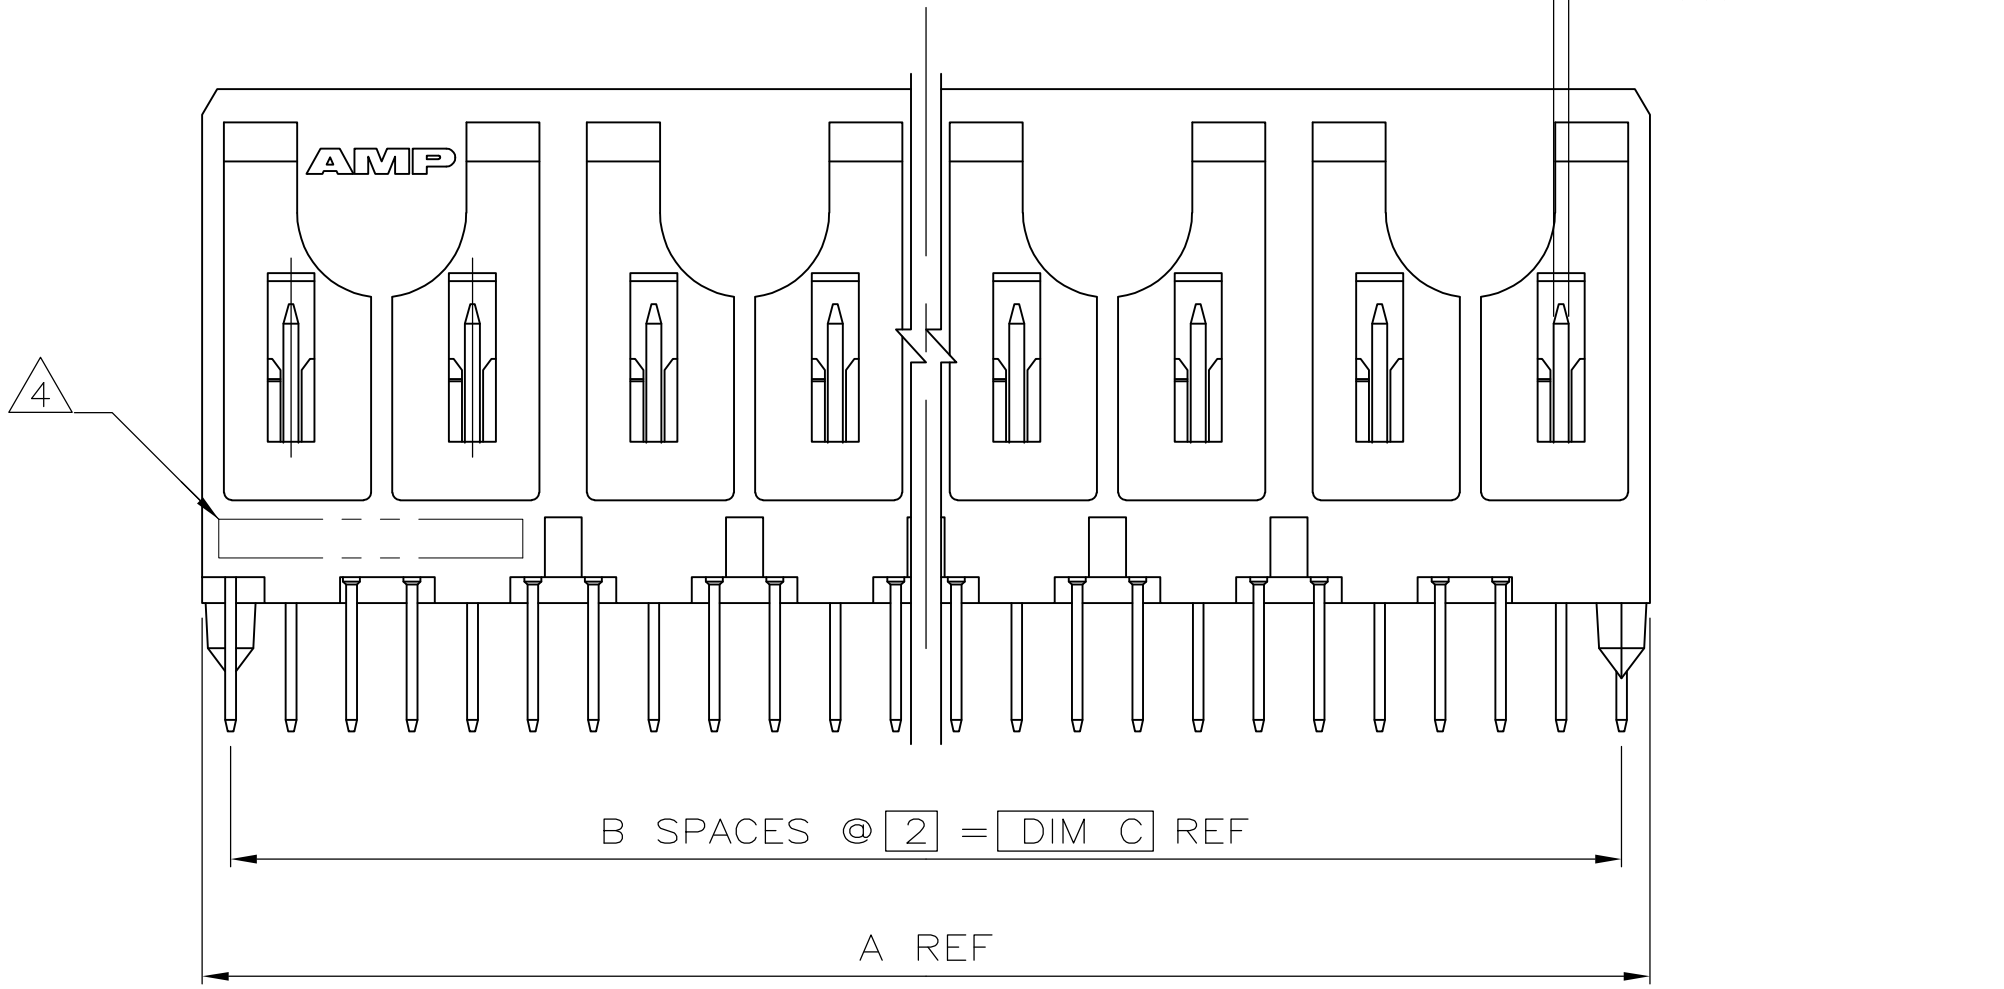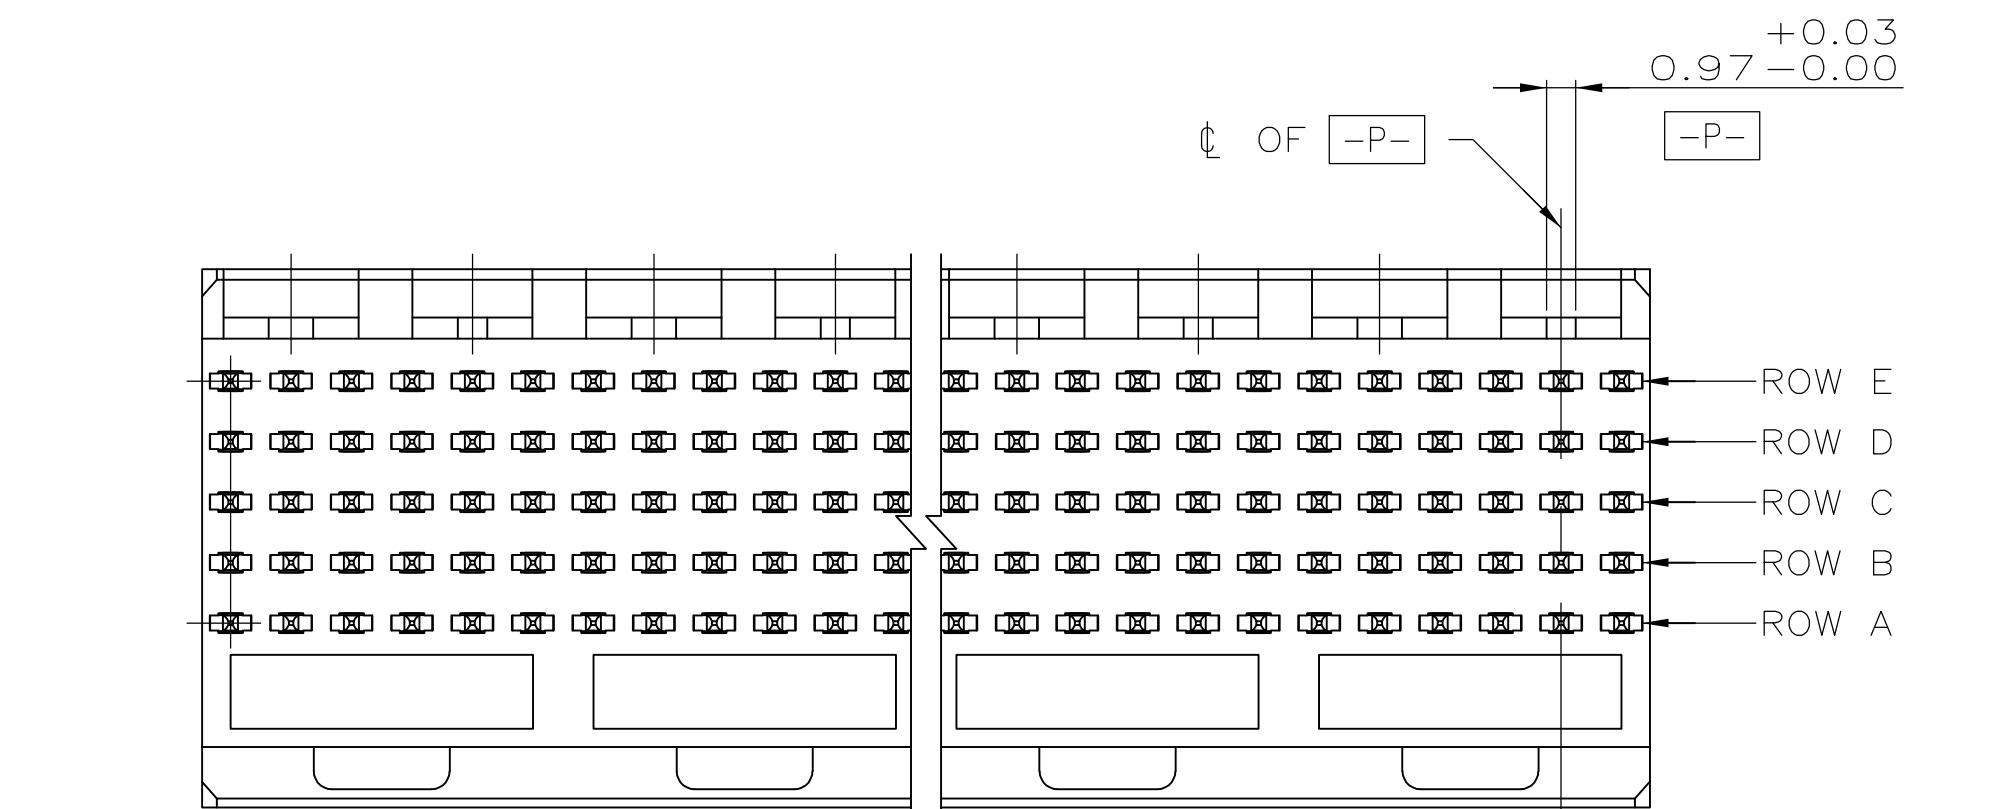

RECOMMENDED CIRCUIT PATTERN (COMPONENT SIDE)

- 1 HOUSING MATERIAL: LIQUID CRYSTAL POLYMER
COLOR: NATURAL.
- 2 CONTACT MATERIAL: PHOSPHOR BRONZE
- 3 CONTACT FINISH:(A)
UNDERPLATE (ENTIRE CONTACT):
0.00127 MIN NICKEL PER SAE-AMS-QQ-N-290
ON MATING SURFACES:
CONFORMS TO ALL TESTING SPECIFIED FOR TELCORDIA
UNCONTROLLED ENVIRONMENT.
ON LEADS:
0.00381 MIN MATTE TIN PER ASTM B 545 OVER UNDERPLATE.
LUBRICATION (MIN MATING SURFACES):
SURFACE CONDITIONER AFTER PLATING.
- 4 PART MARKING LOCATED APPROXIMATELY AS SHOWN.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

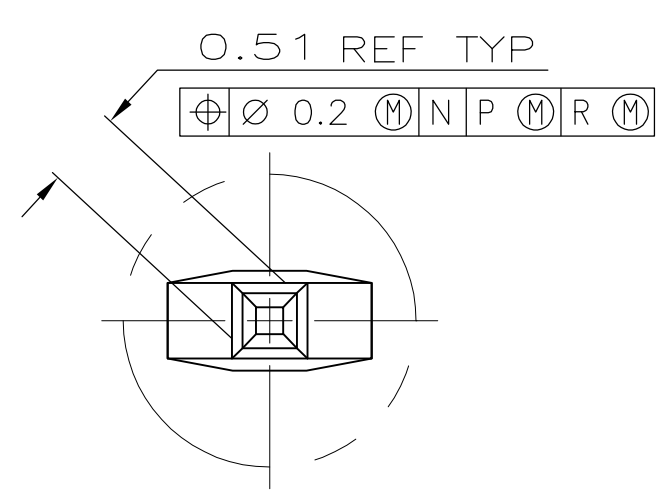

DETAIL Z
SCALE 20:1

5	OBSOLETE	130	65	131.88	3	330	1-5223000-1
	OBSOLETE	118	59	119.88	3	300	1-5223000-0
5	OBSOLETE	106	53	107.88	3	270	-5223000-9
		94	47	95.88	3	240	5223000-8
5	OBSOLETE	82	41	83.88	3	210	-5223000-7
5	OBSOLETE	70	35	71.88	3	180	-5223000-6
		58	29	59.88	3	150	5223000-5
5	OBSOLETE	46	23	47.88	3	120	-5223000-4
		34	17	35.88	3	90	5223000-3
		22	11	23.88	3	60	5223000-2
		10	5	11.88	3	30	5223000-1
		C	B	A	FINISH	NO OF SIGNAL POSN	PART NUMBER