


# Lockable DC Jack

161-0725-E



Lockable DC Jack

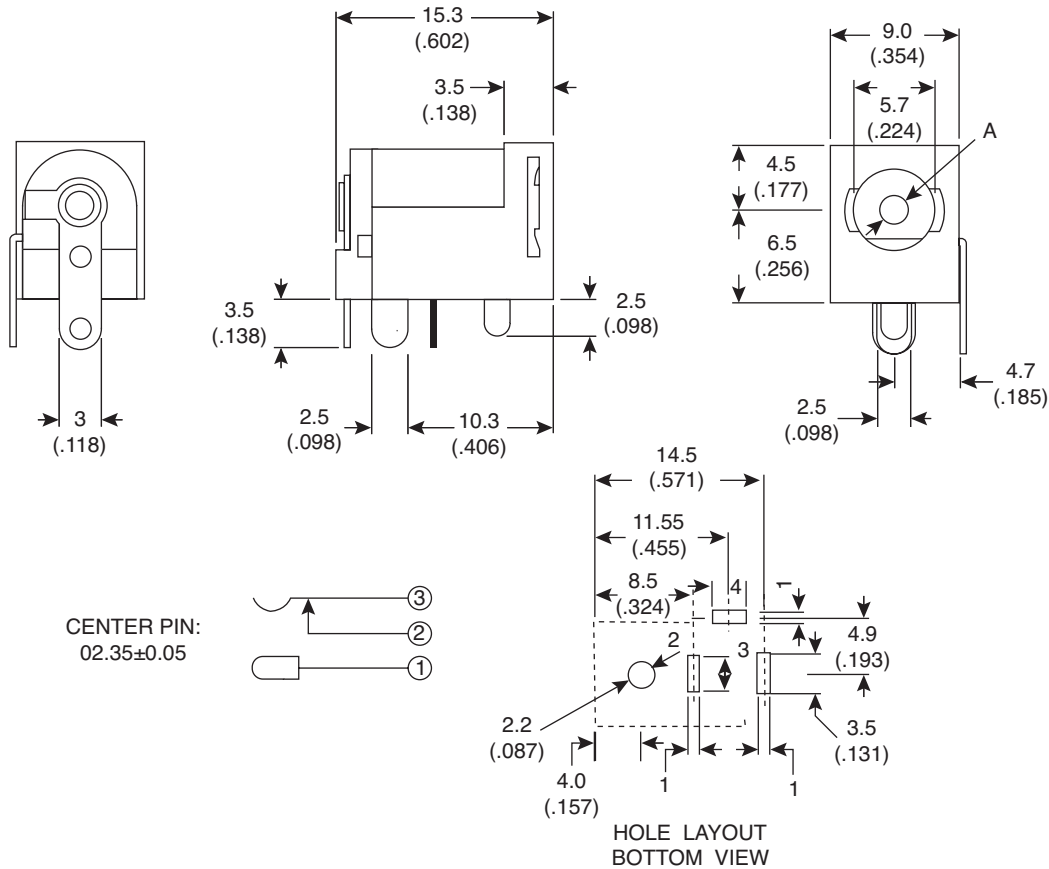

Dimensions: mm and (In.)

SPECIFICATIONS	
<b>Rating:</b>	DC 18V 1.5A
<b>Contact resistance:</b>	30mΩ max
<b>Insulation resistance:</b>	500VDC / 100Ω min
<b>Withstand voltage:</b>	500VAC 1 minute
<b>Body:</b>	Poly carbamate
<b>Insulator:</b>	Poly carbamate
<b>Terminal A:</b>	Tin plated brass
<b>Terminal B:</b>	Tin plated brass
<b>Contact spring:</b>	Tin plated copper
<b>Pin:</b>	Nickel plated brass
<b>Tolerance:</b>	0.3mm
<b>RoHS Compliant</b>	

Use with standard DC power plugs and the locking detent DC power plugs 171-0725-EX, 171-0726-EX

Date Last Revised: 8-23-06

**Available from Mouser Electronics**  
**1-800-346-6873**  
**www.mouser.com**

KC- 300861

161-0725-E