

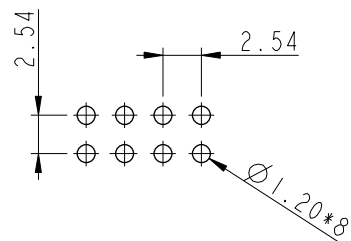


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN1730308	2017/03/21	Ruru	Change Logo
D	C190273	2019/03/13	Ruru	Modify Note

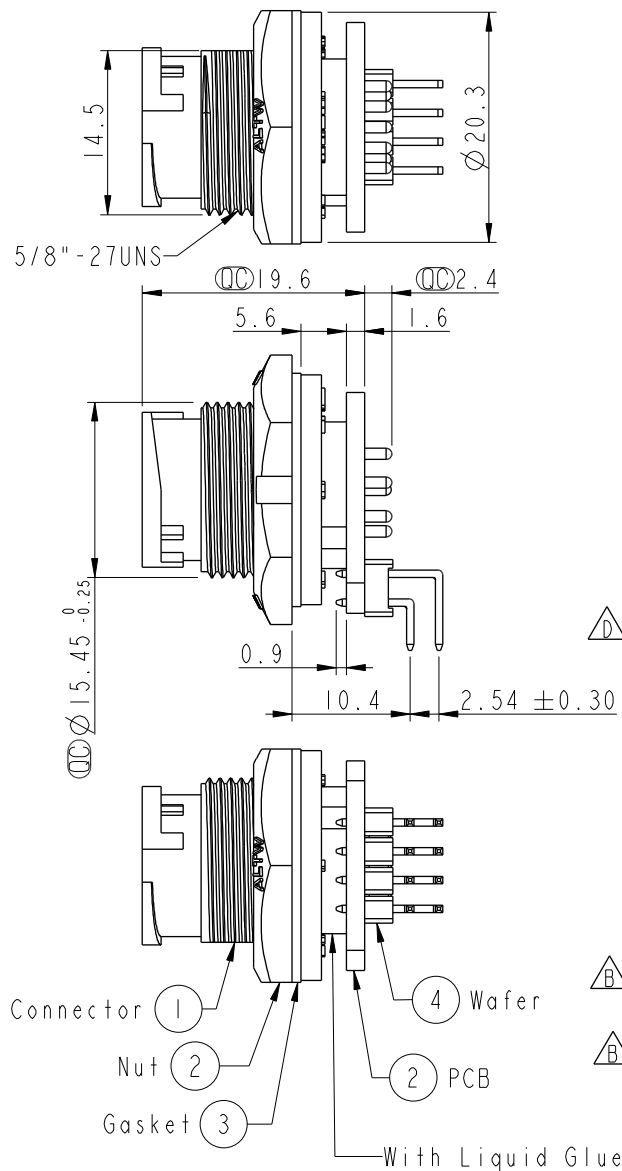

8 Pin Male Connector
Male Pin PCB Layout

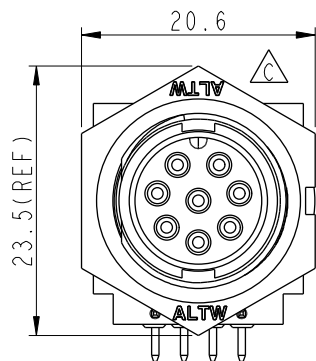


Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black
- * PCB: FR4 EPOXY Glass
- * Wafer: PH=2.54 雙排, 90°


* Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 3.0mm

* Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.5mm

* Gasket and Nut are packed separately




Pin Assignments
Front View

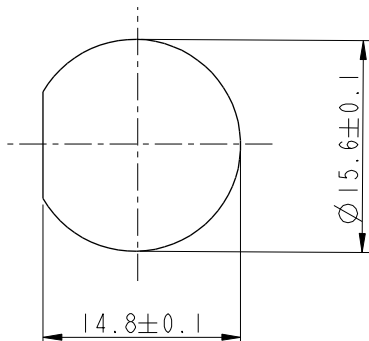

Recommended Panel Cut-out

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE
Circular Panel Lock
8Pin M Conn M Pin For R/A

SCALE 1:1 SIZE A4 SHEET 1 OF 1
REV. D WC-REV. A.5 $\varnothing$ Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	BD-08PMMR-LC7001	DRAWN BY	Ruru	DATE	2019-03-13
DWG NO	BD-08PMMR-LC7001	CHECKED BY	Rita	DATE	2019-03-13
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-13

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.