



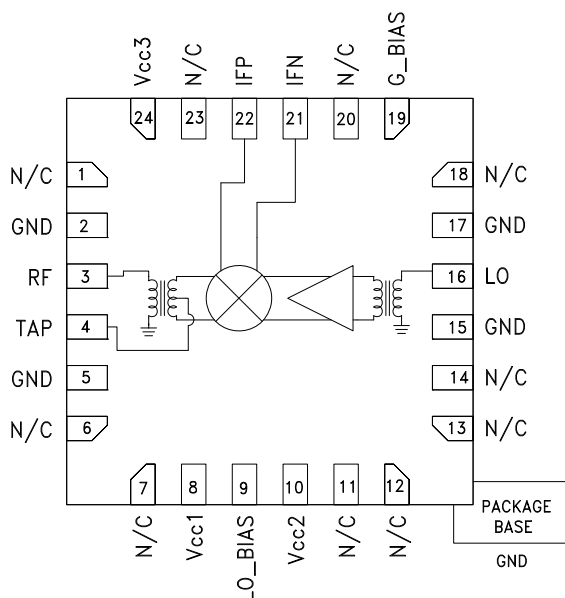
## BICMOS MIXER W/ INTEGRATED LO AMPLIFIER, 700 - 1100MHz

### Typical Applications

The HMC786LP4E is Ideal for:

- Cellular/3G & LTE/WiMAX/4G
- Basestations & Repeaters
- GSM, CDMA & OFDM
- Transmitters and Receivers

### Functional Diagram



### Features

- High Input IP3: +38 dBm
- 7.5 dB Conversion Loss @ 0 dBm LO
- Optimized for High Side LO Input
- 24 Lead 4x4mm SMT Package: 16mm<sup>2</sup>

### General Description

The HMC786LP4E is a high dynamic range passive MMIC mixer with integrated LO amplifier in a 4x4 SMT QFN package covering 0.7 to 1.1 GHz. Excellent input IP3 performance of +40 dBm for down conversion is provided for 3G & 4G GSM/CDMA applications at an LO drive of 0 dBm. With an input 1 dB compression of +25 dBm, the RF port will accept a wide range of input signal levels. Conversion loss is 7.5 dB typical. Up to 250 MHz IF frequency response will satisfy GSM/CDMA transmit or receive frequency plans. The HMC786LP4E is optimized for high side LO frequency plans for 0.7 - 1.1 GHz RF Band and is pin for pin compatible with the HMC686LP4E

### Downconverter Electrical Specifications,

$T_A = +25^\circ \text{C}$ , LO = 0 dBm, Vcc = Vcc1, 2, 3 = +5V, G\_Bias = +2.5V \*

| Parameter                      | Min. | Typ.        | Max. | Min. | Typ.          | Max. | Units |
|--------------------------------|------|-------------|------|------|---------------|------|-------|
| Frequency Range, RF            |      | 0.7 - 1.1   |      |      | 0.824 - 0.915 |      | GHz   |
| Frequency Range, LO            |      | 0.75 - 1.35 |      |      | 0.974 - 1.065 |      | GHz   |
| Frequency Range, IF            |      | 50 - 250    |      |      | 150           |      | MHz   |
| Conversion Loss                |      | 7.5         | 9.5  |      | 7.5           | 9.5  | dB    |
| Noise Figure (SSB)             |      | 7.5         |      |      | 7.5           |      | dB    |
| IP3 (Input)                    |      | 36          |      |      | 38            |      | dBm   |
| 1 dB Compression (Input)       |      | 26          |      |      | 27            |      | dBm   |
| LO to RF Isolation             | 18   | 24          |      | 18   | 23            |      | dB    |
| LO to IF Isolation             | 23   | 30          |      | 23   | 30            |      | dB    |
| RF to IF Isolation             | 25   | 39          |      | 30   | 40            |      | dB    |
| LO Drive Input Level (Typical) |      | -1 to +6    |      |      | -1 to +6      |      | dBm   |
| Supply Current (Icc total)     | 120  | 130         | 140  | 120  | 130           | 140  | mA    |

\* Unless otherwise noted all measurements performed as downconverter with high side LO & IF = 150 MHz.

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D



## BICMOS MIXER W/ INTEGRATED LO AMPLIFIER, 700 - 1100MHz

### Upconverter Electrical Specifications,

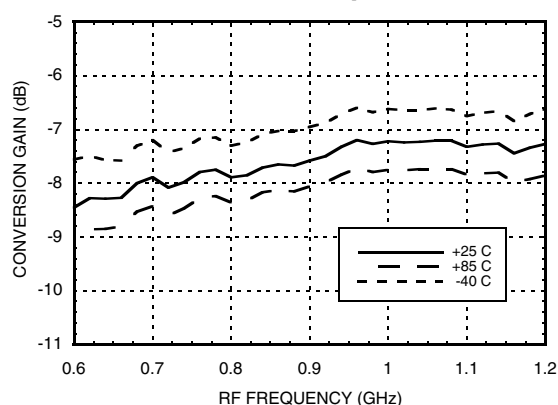
$T_A = +25^\circ\text{C}$ , LO = 0 dBm, Vcc = Vcc1, 2, 3 = +5V, G\_Bias = +2.5V \*

| Parameter                      | Min. | Typ.        | Max. | Min.          | Typ. | Max. | Units |
|--------------------------------|------|-------------|------|---------------|------|------|-------|
| Frequency Range, RF            |      | 0.7 - 1.1   |      | 0.860 - 0.960 |      |      | GHz   |
| Frequency Range, LO            |      | 0.75 - 1.35 |      | 0.980 - 1.080 |      |      | GHz   |
| Frequency Range, IF            |      | 50 - 250    |      | 120           |      |      | MHz   |
| Conversion Loss                |      | 7.5         | 9.5  |               | 7.5  | 9.5  | dB    |
| IP3 (Input)                    |      | 33          |      | 36            |      |      | dBm   |
| 1 dB Compression (Input)       |      | 24          |      | 24            |      |      | dBm   |
| LO Drive Input Level (Typical) |      | -1 to +6    |      | -1 to +6      |      |      | dBm   |
| Supply Current (Icc total)     | 120  | 130         | 140  | 120           | 130  | 140  | mA    |


\*Unless otherwise noted all measurements performed as upconverter with high side LO & IF = 120 MHz.

### Downconverter Performance


#### Conversion Gain vs. Temperature









#### Conversion Gain vs. LO Drive

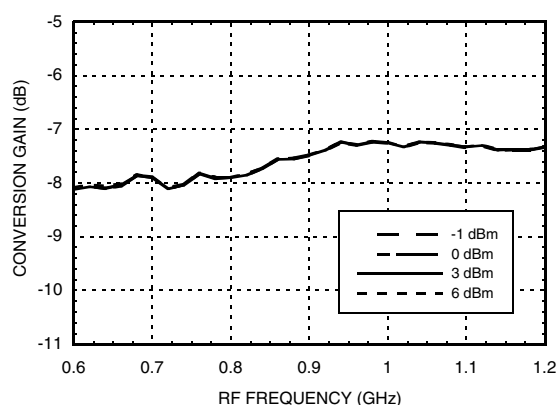

#### Conversion Gain vs. G\_Bias voltage

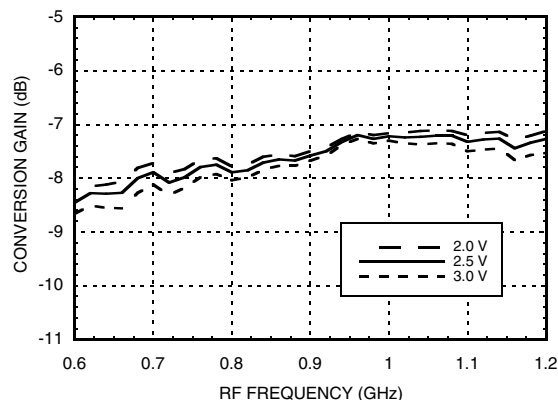

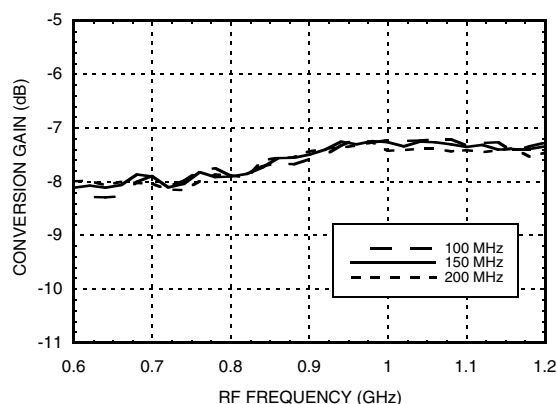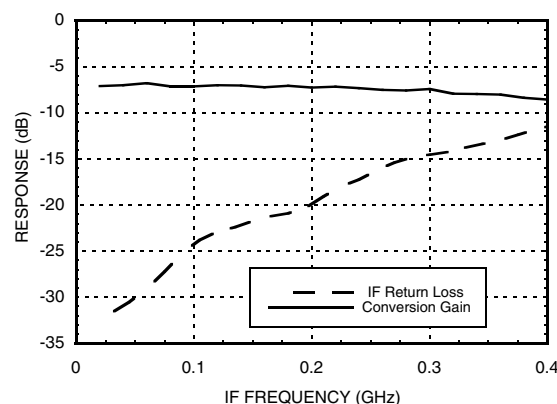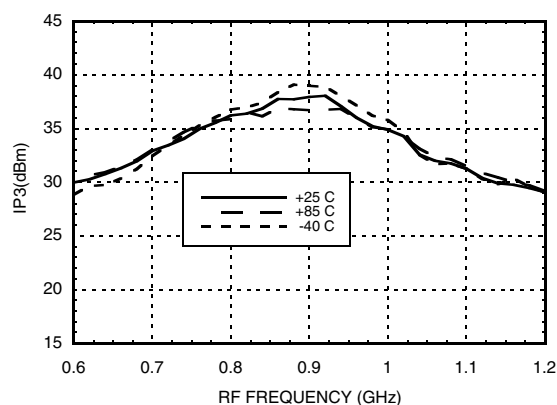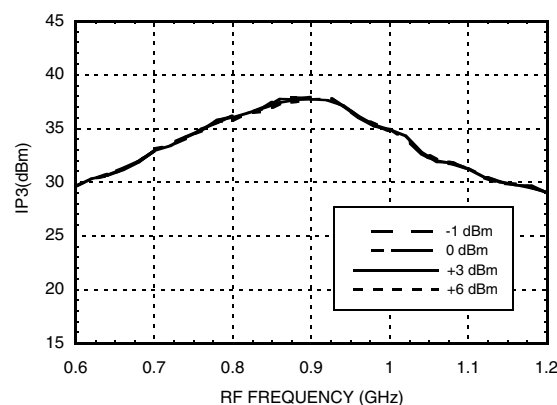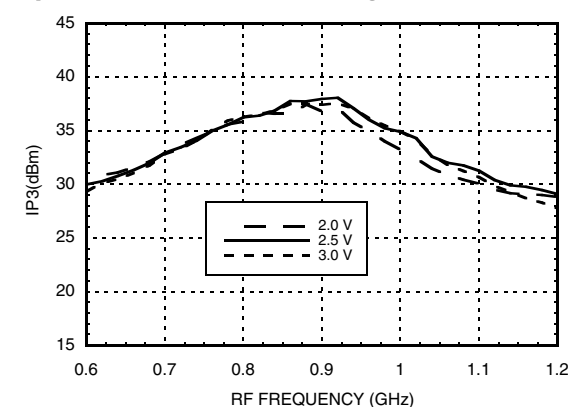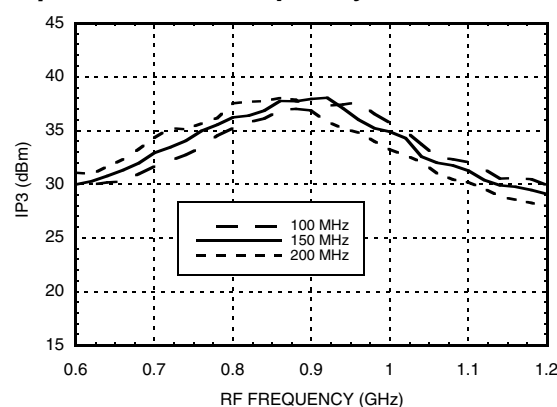

**BICMOS MIXER W/ INTEGRATED  
LO AMPLIFIER, 700 - 1100MHz**
**Downconverter Performance**
**Conversion Gain vs. IF Frequency**

**IF Bandwidth (LO = 1.1 GHz)**

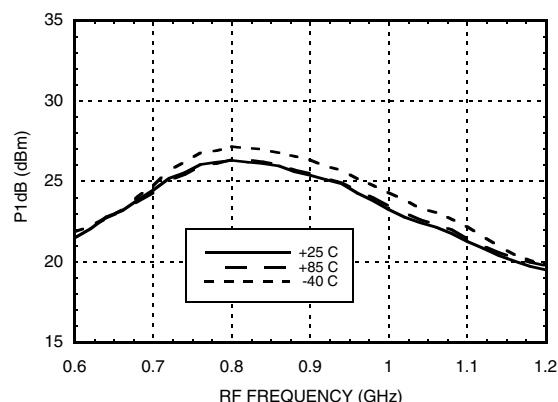**Input IP3 vs. Temperature <sup>[1]</sup>**

**Input IP3 vs. LO Drive <sup>[1]</sup>**

**Input IP3 vs. G\_Bias Voltage <sup>[1]</sup>**

**Input IP3 vs. IF Frequency <sup>[1]</sup>**




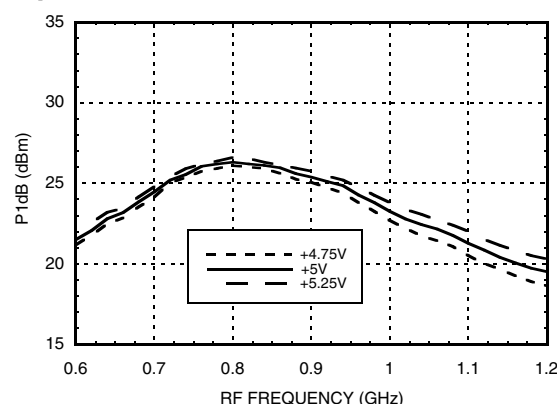
## BICMOS MIXER W/ INTEGRATED LO AMPLIFIER, 700 - 1100MHz

### Downconverter Performance

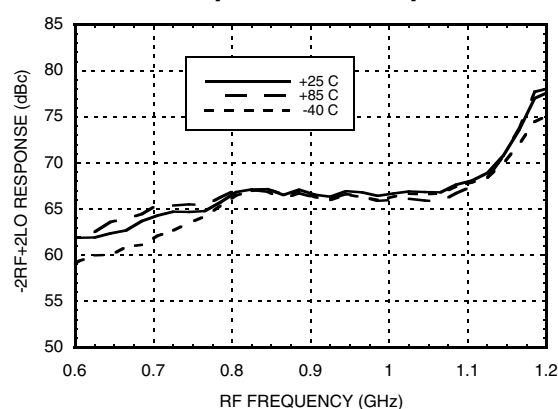
**Input P1dB vs. Temperature**




**Input P1dB vs. Vcc**




**-2RF +2LO Response vs. Temperature [2]**




**-2RF +2LO Response vs. LO Drive [2]**

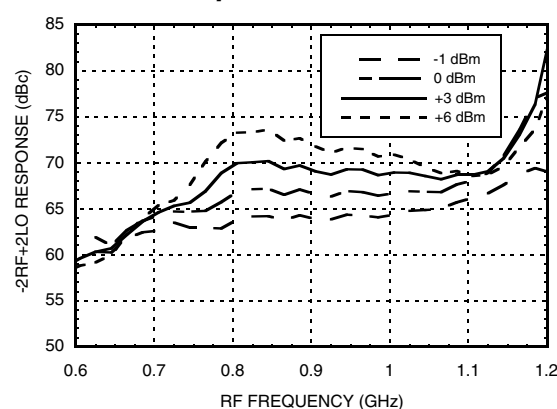






**-3RF +3LO Response vs. Temperature [2]**

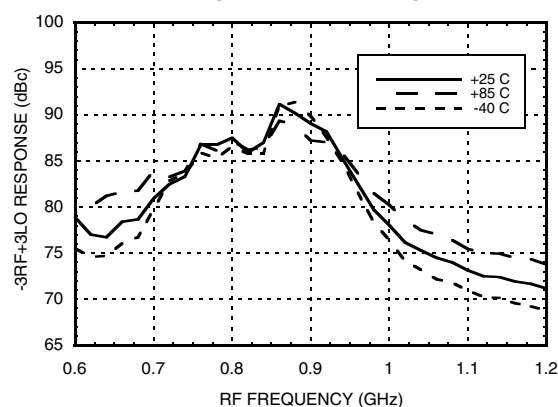

**-3RF +3LO Response vs. LO Drive [2]**

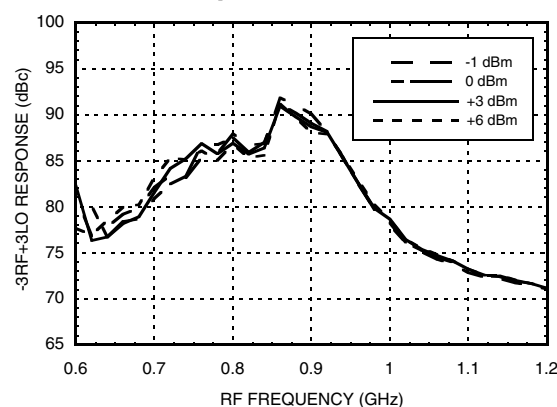

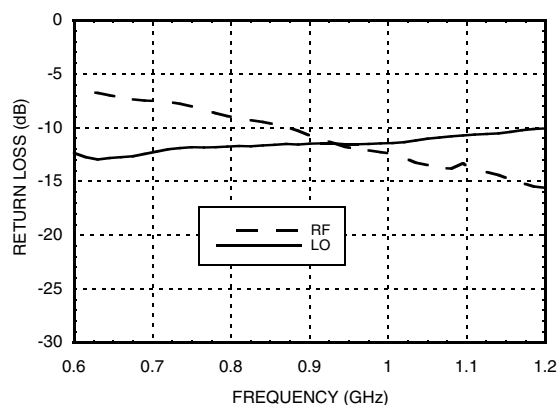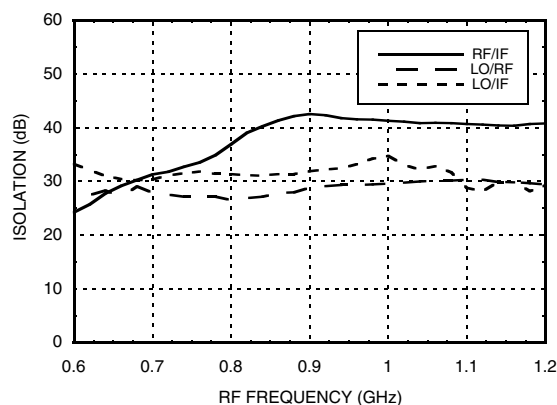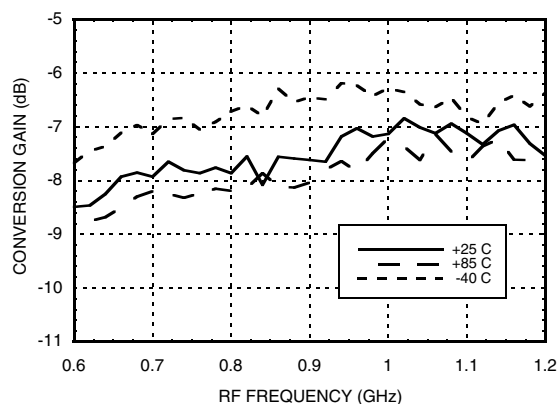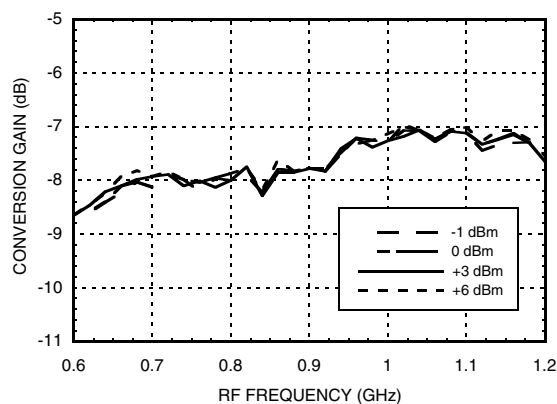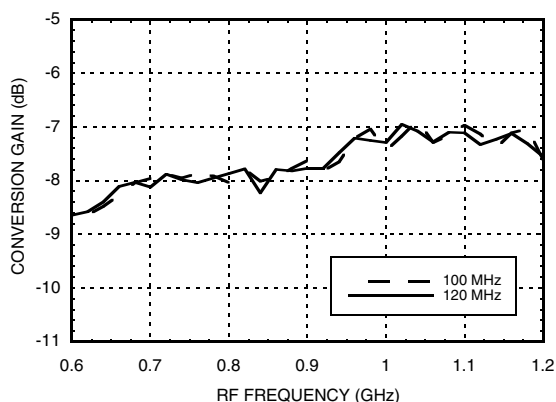[1] Two-tone input power = +9 dBm each tone, 1 MHz spacing. [2] Referenced to RF Input Power at 0 dBm



**BICMOS MIXER W/ INTEGRATED  
LO AMPLIFIER, 700 - 1100MHz**
**Return Loss****Isolation****Upconverter Performance****Conversion Gain vs. Temperature****Conversion Gain vs. LO Drive****Conversion Gain vs. IF Frequency**




**BICMOS MIXER W/ INTEGRATED  
LO AMPLIFIER, 700 - 1100MHz**

**Upconverter Performance**

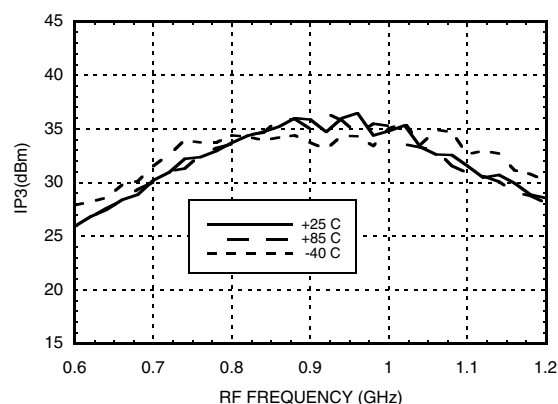
**Input IP3 vs. Temperature <sup>[1]</sup>**




**Input IP3 vs. LO Drive <sup>[1]</sup>**

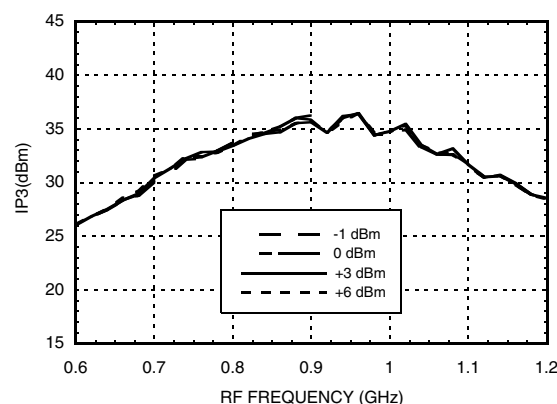

**Input IP3 vs. IF Frequency <sup>[1]</sup>**

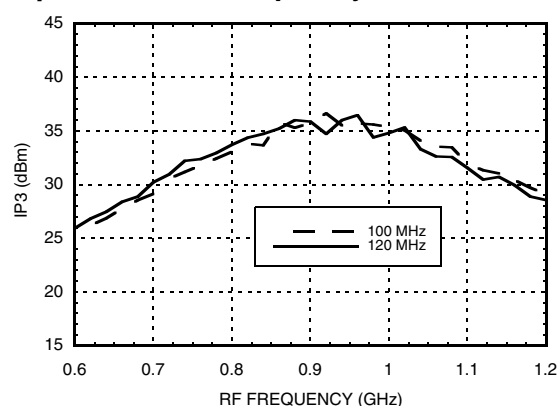

**Input P1dB vs. Temperature**

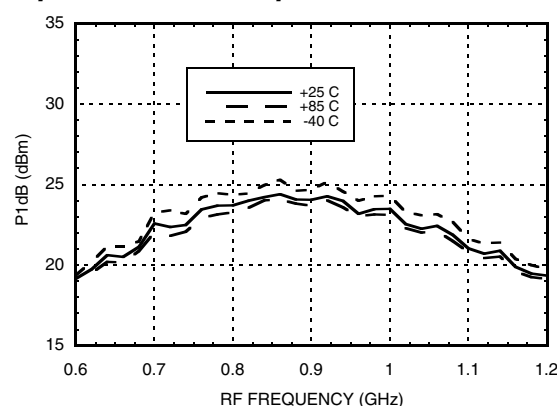

[1] Two-tone input power = +9 dBm each tone, 1 MHz spacing.




### Typical Supply Current vs. Vcc
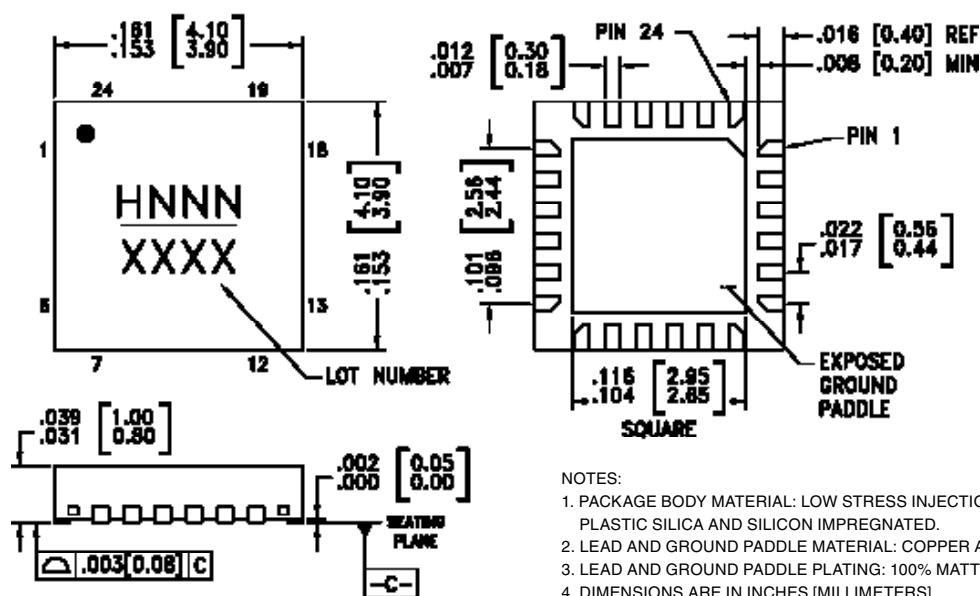
| Vcc1, 2, 3 (V) | Icc total (mA) |
|----------------|----------------|
| 4.75           | 120            |
| 5.00           | 130            |
| 5.25           | 145            |



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

**BOTTOM VIEW**



### Package Information



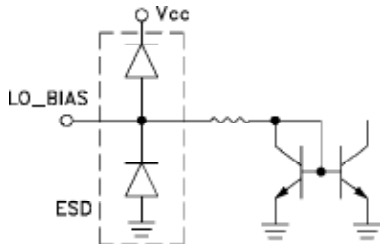



| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[2]</sup> |
|-------------|----------------------------------------------------|---------------|---------------------|--------------------------------|
| HMC786LP4E  | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[1]</sup> | <u>H786</u><br>XXXX            |

[2] 4-Digit lot number XXXX

*Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.*

For price, delivery, and to place orders: Analog Devices, Inc.,  
One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106  
Phone: 781-329-4700 • Order online at [www.analog.com](http://www.analog.com)  
Application Support: Phone: 1-800-ANALOG-D


**BICMOS MIXER W/ INTEGRATED  
LO AMPLIFIER, 700 - 1100MHz**
**Pin Descriptions**


| Pin Number                   | Function         | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Interface Schematic                                                                   |
|------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| 1, 6, 7, 11 - 14, 18, 20, 23 | N/C              | No connection. These pins may be connected to RF ground. Performance will not be affected.                                                                                                                                                                                                                                                                                                                                                                      |                                                                                       |
| 2, 5, 15, 17                 | GND              | These pins and package bottom must be connected to RF/DC ground.                                                                                                                                                                                                                                                                                                                                                                                                |    |
| 3                            | RF               | This pin is matched single-ended to 50 Ohm and DC shorted to ground through a balun.                                                                                                                                                                                                                                                                                                                                                                            |    |
| 4                            | TAP              | Center tap of secondary side of the internal RF balun. Short to ground with a zero Ohms close to the package.                                                                                                                                                                                                                                                                                                                                                   |                                                                                       |
| 8, 10, 24                    | Vcc1, Vcc2, Vcc3 | Power supply voltage. See application circuit for required external components.                                                                                                                                                                                                                                                                                                                                                                                 |   |
| 9                            | LO_BIAS          | LO buffer current adjustment pin. Adjust the LO buffer current through the external resistor R9 shown in the application circuit (connect 215 Ohms for nominal operation). This adjustment allows for a trade-off between power dissipation and linearity performance of the converter.                                                                                                                                                                         |  |
| 16                           | LO               | This pin is matched single-ended to 50 Ohm and DC shorted to ground through a balun.                                                                                                                                                                                                                                                                                                                                                                            |  |
| 19                           | G_BIAS           | External bias with a nominal value of 2.5V. See application circuit for recommended external components. G_Bias can be set to between 0 and 5Vdc. This adjustment allows for a trade off between conversion loss and linearity performance of the converter (see figures CG, IP3 vs. G_BIAS). The G_bias pin has an internal 15 KOhms resistance to ground and 15 KOhms to Vcc. Internal resistive divider sets 2.5 V for G_bias and can be changed externally. |  |
| 21, 22                       | IFN, IFP         | Differential IF input / output pins matched to differential 50 Ohms. For applications not requiring operation to DC an off chip DC blocking capacitor should be used.                                                                                                                                                                                                                                                                                           |  |





# BICMOS MIXER W/ INTEGRATED LO AMPLIFIER, 700 - 1100MHz
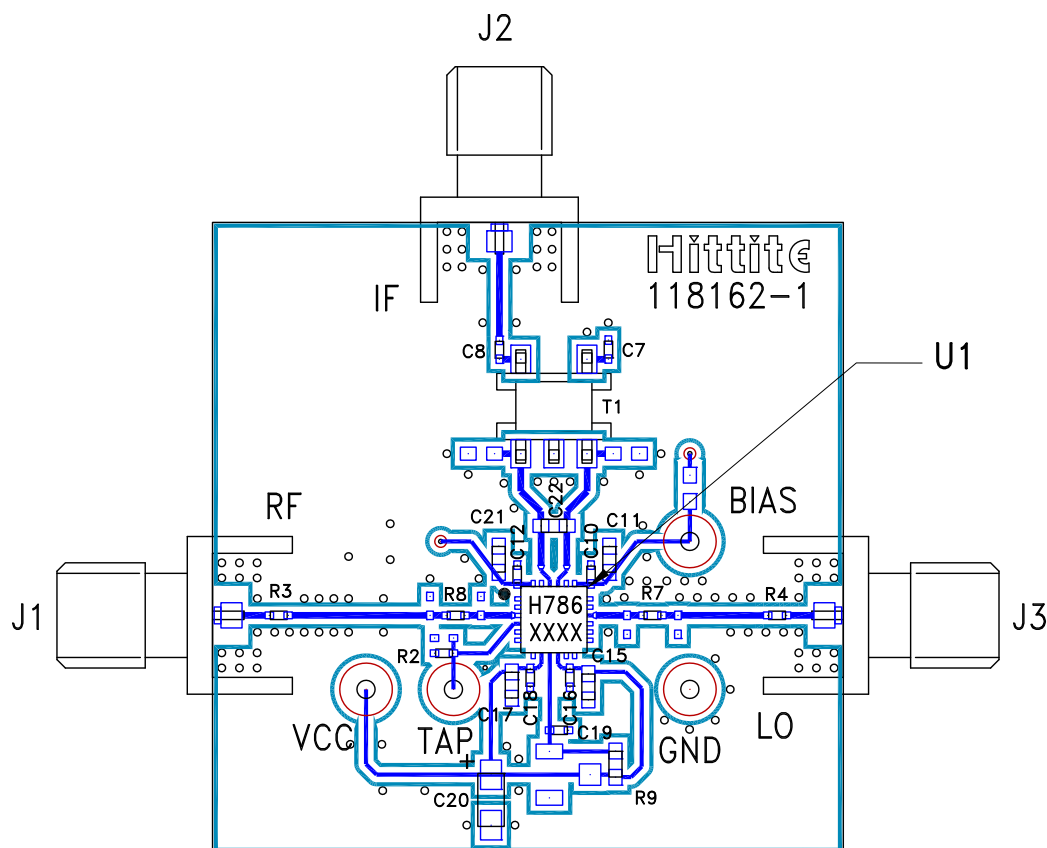
## Evaluation PCB



## List of Materials for Evaluation PCB 121769 <sup>[1]</sup>

| Item               | Description                        |
|--------------------|------------------------------------|
| J1 - J3            | SMA Connector                      |
| J4 - J7            | DC Pin                             |
| C7, C8             | 10 nF Capacitor, 0402 Pkg.         |
| C10, C12, C16, C18 | 1 nF Capacitor, 0402 Pkg.          |
| C11, C15, C17, C21 | 0.1 $\mu$ F Capacitor, 0402 Pkg.   |
| C19                | 22 pF Capacitor, 0402 Pkg.         |
| C20                | 4.7 $\mu$ F Case A, Tantulum       |
| C22                | 1.8 pF Capacitor, 0603 Pkg.        |
| R2 - R4, R7, R8    | 0 Ohm Resistor, 0402 Pkg.          |
| R9                 | 270 Ohm Resistor, 0603 Pkg.        |
| T1                 | 1:1 Transformer - Tyco MABA CT0039 |
| U1                 | HMC786LP4E                         |
| PCB <sup>[2]</sup> | 118162 Evaluation PCB              |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350 or Arlon 25 FR

The circuit board used in the final application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request.



**BICMOS MIXER W/ INTEGRATED  
LO AMPLIFIER, 700 - 1100MHz**

**Application Circuit**

