

## Precision, Dual, JFET Input Operational Amplifier

### FEATURES

- Low Input Offset Voltage
- Low Input Offset Voltage Drift
- Low Supply Current
- High Slew Rate
- Wide Bandwidth
- Low Noise
- Low Input Bias Current
- No Phase Reversal
- RF noise Immunity
- Guaranteed Temperature
- Operating Voltage
- Package

$V_{IO}=400\mu\text{V}$  max.  
 $V_{IO}=700\mu\text{V}$  max.  
 ( $T_a = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ )  
 $\Delta V_{IO}/\Delta T=5\mu\text{V}/^\circ\text{C}$  max.  
 ( $T_a = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ )  
 $I_{CC}=3\text{mA}$  max.  
 $SR=20\text{V}/\mu\text{s}$  typ.  
 $f_t=7\text{MHz}$  typ.  
 $e_n=10\text{nV}/\sqrt{\text{Hz}}$   
 (at  $f=1\text{kHz}$  typ.)  
 $I_B=80\text{pA}$  max.  
 (at  $T_a=25^\circ\text{C}$ )

$T_{opr} = -40^\circ\text{C}$  to  $+125^\circ\text{C}$   
 $V_{opr} = \pm 4.5\text{V}$  to  $\pm 16\text{V}$   
 MSOP8 (VSP8)  
 meet JEDEC MO-187-DA  
 SOP8 JEDEC 150 mil

### GENERAL DESCRIPTION


The NJM8512 is a dual high precision JFET input operational amplifier featuring low offset, low offset drift, low bias current, high slew rate, low noise and wide operating temperature range.

The precision performance, high speed and low noise make the NJM8512 especially suitable for filter and amplification of high speed and small signal in instruments, automated test equipment, sensors and other precision applications.

### PACKAGE OUTLINE



NJM8512AR  
 NJM8512BR  
 (MSOP8 (VSP8))




NJM8512AE  
 NJM8512BE  
 (SOP8)

### APPLICATIONS

- Current Sensor
- Photodiode Amplification
- Reference Voltage Circuit
- Automatic Test Equipment

### PIN CONFIGURATION

(Top View)





MSOP8(VSP8)  
 SOP8

#### PIN FUNCTION

- 1: OUTPUT A
- 2: -INPUT A
- 3: +INPUT A
- 4:  $V^-$
- 5: +INPUT B
- 6: -INPUT B
- 7: OUTPUT B
- 8:  $V^+$

### ELECTRICAL CHARACTERISTICS

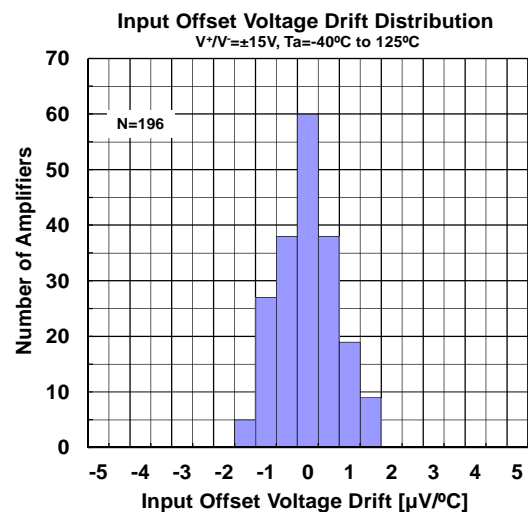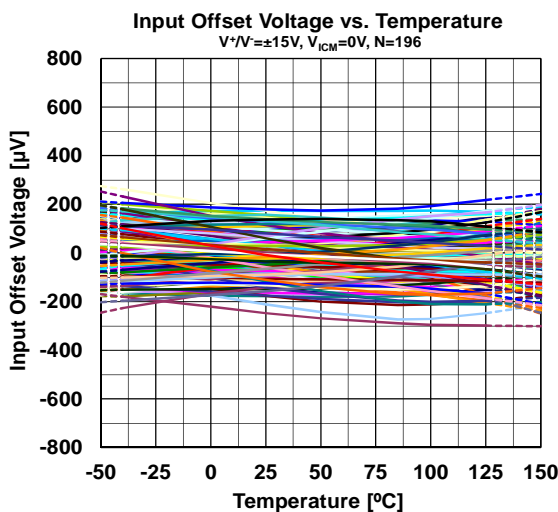

# NJM8512

## ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C, unless otherwise noted.)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	$V^+V^-$	$\pm 18$	V
Differential Input Voltage	$V_{ID}$	$\pm 36$ (Note1)	V
Input Voltage	$V_{IN}$	$V^- - 0.3$ to $V^+ + 0.3$ (Note2)	V
Input Current	$I_{IN}$	$\pm 10$ (Note3)	mA
Power Dissipation MSOP8 (VSP8) SOP8	$P_D$	(2-layer / 4-layer) 595(Note4) / 805 (Note4) 690 (Note4) / 1000 (Note4)	mW
Output Short-Circuit Duration		Infinite( $T_a \leq 25^\circ$ ) (Note4)	
Operating Temperature Range	$T_{opr}$	-40 to +125	°C
Storage Temperature Range	$T_{stg}$	-65 to +150	°C

(Note1) Differential Input Voltage is the voltage difference between +INPUT and -INPUT.


(Note2) The normal operation will establish when any input is within the Common Mode Input Voltage Range of electrical characteristics.

(Note3) If the input voltage exceeds the supply voltage, the input current must be limited 10 mA or less by using a restriction resistance.

(Note4) 2-layer : EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 2layers, FR-4) mounting.

4-layer : EIA/JEDEC STANDARD Test board (76.2 x 114.3 x 1.6mm, 4layers, FR-4) mounting.

See Figure "Fig.1-1 : Power Dissipation Curve" when ambient temperature is over 25°C.

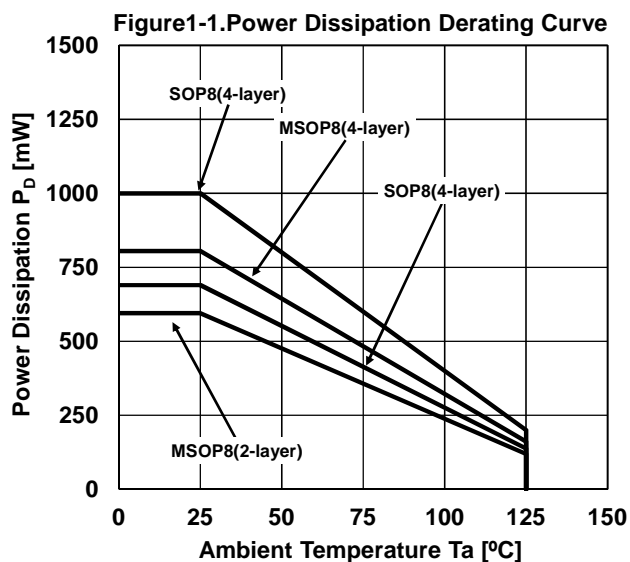

## ■ RECOMMENDED OPERATING VOLTAGE (Ta=25°C)

PARAMETER	SYMBOL	RATING	MIN.	TYP.	MAX.	UNIT
Supply Voltage	$V^+V^-$		$\pm 4.5$	-	$\pm 16$	V

## ■ ELECTRICAL CHARACTERISTICS ( $V^+ / V^- = \pm 15V$ , $T_a = 25^\circ C$ , $V_{ICM} = 0V$ , unless otherwise noted.)







PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
<b>Input Characteristics</b>						
Input Offset Voltage						
NJM8512BR/NJM8512BE	$V_{IO1}$		-	80	400	$\mu V$
	$V_{IO2}$	$T_a = -40^\circ C$ to $125^\circ C$	-	-	700	$\mu V$
NJM8512AR/NJM8512AE	$V_{IO1}$		-	80	800	$\mu V$
	$V_{IO2}$	$T_a = -40^\circ C$ to $125^\circ C$	-	-	1400	$\mu V$
Input Offset Voltage Drift						
NJM8512BR/NJM8512BE	$\Delta V_{IO} / \Delta T$	$T_a = -40^\circ C$ to $125^\circ C$	-	0.8	5	$\mu V / ^\circ C$
NJM8512AR/NJM8512AE	$\Delta V_{IO} / \Delta T$	$T_a = -40^\circ C$ to $125^\circ C$	-	1	9	$\mu V / ^\circ C$
Input Bias Current	$I_{B1}$		-	25	80	pA
	$I_{B2}$	$T_a = -40^\circ C$ to $125^\circ C$	-	-	35	nA
Input Offset Current	$I_{IO1}$		-	6	75	pA
	$I_{IO2}$	$T_a = -40^\circ C$ to $125^\circ C$	-	-	2	nA
Common Mode Input Voltage Range	$V_{ICM1}$	CMR 86dB	-12.5	-	+12.5	V
	$V_{ICM2}$	CMR 80dB, $T_a = -40^\circ C$ to $125^\circ C$	-12.5	-	+12.5	V
Common Mode Rejection Ratio	CMR1	$V_{CM} = -12.5V$ to $+12.5V$	86	108	-	dB
	CMR2	$V_{CM} = -12.5V$ to $+12.5V$ , $T_a = -40^\circ C$ to $125^\circ C$	80	-	-	dB
	CMR3	$V_{CM} = -10V$ to $+10V$	100	120	-	dB
Voltage Gain	$A_{V1}$	$R_L = 2k\Omega$ , $V_O = -13.5V$ to $+13.5V$	90	100	-	dB
	$A_{V2}$	$R_L = 2k\Omega$ , $V_O = -13.5V$ to $+13.5V$ , $T_a = -40^\circ C$ to $125^\circ C$	82	-	-	dB
	$A_{V3}$	$R_L = 10k\Omega$ , $V_O = -13.5V$ to $+13.5V$	98	106	-	dB
Input capacitance	$C_{IN}$		-	10	-	pF
Channel Separation	CS	DC	-	125	-	dB
<b>Output Characteristics</b>						
Maximum Output Voltage	$V_{OH1}$	$R_L = 10k\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	+14.0	+14.2	-	V
	$V_{OL1}$	$R_L = 10k\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	-	-14.9	-14.6	V
	$V_{OH2}$	$R_L = 2k\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	+13.8	+14.1	-	V
	$V_{OL2}$	$R_L = 2k\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	-	-14.8	-14.4	V
	$V_{OH31}$	$R_L = 600\Omega$	+13.5	+13.9	-	V
	$V_{OH32}$	$R_L = 600\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	+11.4	-	-	V
	$V_{OL41}$	$R_L = 600\Omega$	-	-14.3	-13.8	V
	$V_{OL42}$	$R_L = 600\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	-	-	-12.1	V
<b>Supply Characteristics</b>						
Supply Current	$I_{CC1}$	$G_V = +1$ , $R_L =$	-	2.6	3.0	mA
	$I_{CC2}$	$G_V = +1$ , $R_L =$ , $T_a = -40^\circ C$ to $125^\circ C$	-	-	3.3	mA
Supply Voltage Rejection Ratio	SVR1	$V^+ / V^- = \pm 4.5V$ to $\pm 16V$	86	110	-	dB
	SVR2	$V^+ / V^- = \pm 4.5V$ to $\pm 16V$ , $T_a = -40^\circ C$ to $125^\circ C$	80	-	-	dB
<b>Dynamic Performance</b>						
Unity Gain Frequency	fT	$G_V = +100$ , $R_L = 2k\Omega$ , $C_L = 10pF$	-	7	-	MHz
Slew Rate	+SR	RISE, $G_V = +1$ , $V_{IN} = 1V_{pp}$ , $R_L = 2k\Omega$	-	20	-	V/ $\mu s$
	-SR	FALL, $G_V = +1$ , $V_{IN} = 1V_{pp}$ , $R_L = 2k\Omega$	-	20	-	V/ $\mu s$
Settling Time	ts1	To 0.1%, 0V to 10V step, $G_V = +1$	-	0.7	-	$\mu s$
	ts2	To 0.01%, 0V to 10V step, $G_V = +1$	-	1.0	-	$\mu s$
Phase Margin	$\Phi_M$		-	70	-	deg
Total Harmonic Distortion	THD	$f_o = 1kHz$ , $G_V = +1$ , $R_L = 2k\Omega$	-	0.0004	-	%
<b>Noise Performance</b>						
Input Voltage Noise Density	$V_{NI}$	$f_o = 0.1Hz$ to $10Hz$	-	0.9	-	$\mu V_{pp}$
	en1	$f_o = 10Hz$	-	20	-	nV/ Hz
	en2	$f_o = 100Hz$	-	11	-	nV/ Hz
	en3	$f_o = 1kHz$	-	10	-	nV/ Hz
	en4	$f_o = 10kHz$	-	9	-	nV/ Hz







# NJM8512







## ■ ELECTRICAL CHARACTERISTICS ( $V^+V^- = \pm 5V$ , $T_a = 25^\circ C$ , $V_{ICM} = 0V$ , unless otherwise noted.)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Input Characteristics						
Input Offset Voltage						
NJM8512BR/NJM8512BE	$V_{IO1}$		-	80	400	$\mu V$
	$V_{IO2}$	$T_a = -40^\circ C$ to $125^\circ C$	-	-	700	$\mu V$
NJM8512AR/NJM8512AE	$V_{IO1}$		-	80	800	$\mu V$
	$V_{IO2}$	$T_a = -40^\circ C$ to $125^\circ C$	-	-	1400	$\mu V$
Input Offset Voltage Drift						
NJM8512BR/NJM8512BE	$\Delta V_{IO}/\Delta T$	$T_a = -40^\circ C$ to $125^\circ C$	-	0.8	5	$\mu V/^\circ C$
NJM8512AR/NJM8512AE	$\Delta V_{IO}/\Delta T$	$T_a = -40^\circ C$ to $125^\circ C$	-	1	9	$\mu V/^\circ C$
Input Bias Current						
	$I_{B1}$		-	21	75	pA
	$I_{B2}$	$T_a = -40^\circ C$ to $125^\circ C$	-	-	31	nA
Input Offset Current						
	$I_{IO1}$		-	5	50	pA
	$I_{IO2}$	$T_a = -40^\circ C$ to $125^\circ C$	-	-	2	nA
Common Mode Input Voltage Range						
	$V_{ICM1}$	CMR 86dB	-2	-	+2.5	V
	$V_{ICM2}$	CMR 80dB, $T_a = -40^\circ C$ to $125^\circ C$	-2	-	+2.5	V
Common Mode Rejection Ratio						
	CMR1	$V_{CM} = -2V$ to $+2.5V$	86	108	-	dB
	CMR2	$V_{CM} = -2V$ to $+2.5V$ , $T_a = -40^\circ C$ to $125^\circ C$	80	-	-	dB
	CMR3	$V_{CM} = -1V$ to $+2V$	92	113	-	dB
Voltage Gain						
	$A_{V1}$	$R_L = 2k\Omega$ , $V_O = -3V$ to $+3V$	85	93	-	dB
	$A_{V2}$	$R_L = 2k\Omega$ , $V_O = -3V$ to $+3V$ , $T_a = -40^\circ C$ to $125^\circ C$	80	-	-	dB
	$A_{V3}$	$R_L = 10k\Omega$ , $V_O = -3V$ to $+3V$	90	100	-	dB
Input capacitance	$C_{IN}$		-	10	-	pF
Channel Separation	CS	DC	-	125	-	dB
Output Characteristics						
Maximum Output Voltage						
	$V_{OH1}$	$R_L = 10k\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	+4.1	+4.3	-	V
	$V_{OL1}$	$R_L = 10k\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	-	-4.9	-4.7	V
	$V_{OH2}$	$R_L = 2k\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	+3.9	+4.2	-	V
	$V_{OL2}$	$R_L = 2k\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	-	-4.9	-4.5	V
	$V_{OH31}$	$R_L = 600\Omega$	+3.7	+4.1	-	V
	$V_{OH32}$	$R_L = 600\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	+3.6	-	-	V
	$V_{OL41}$	$R_L = 600\Omega$	-	-4.8	-4.3	V
	$V_{OL42}$	$R_L = 600\Omega$ , $T_a = -40^\circ C$ to $125^\circ C$	-	-	-4.2	V
Supply Characteristics						
Supply Current						
	$I_{CC1}$	$G_V = +1$ , $R_L =$	-	2.0	3.0	mA
	$I_{CC2}$	$G_V = +1$ , $R_L =$ , $T_a = -40^\circ C$ to $125^\circ C$	-	-	3.3	mA
Dynamic Performance						
Unity Gain Frequency	fT	$G_V = +100$ , $R_L = 2k\Omega$ , $C_L = 10pF$	-	7	-	MHz
Slew Rate	+SR	RISE, $G_V = +1$ , $V_{IN} = 1V_{pp}$ , $R_L = 2k\Omega$	-	18	-	V/ $\mu s$
	-SR	FALL, $G_V = +1$ , $V_{IN} = 1V_{pp}$ , $R_L = 2k\Omega$	-	18	-	V/ $\mu s$
Settling Time	ts1	To 0.1%, 0V to 4V step, $G_V = +1$	-	0.5	-	$\mu s$
Phase Margin	$\Phi_M$		-	65	-	deg
Total Harmonic Distortion	THD	fo=1kHz, $G_V = +1$ , $R_L = 2k\Omega$	-	0.0005	-	%
Noise Performance						
Input Voltage Noise Density						
	$V_{NI}$	fo=0.1Hz to 10Hz	-	0.9	-	$\mu V_{pp}$
	en1	fo=10Hz	-	20	-	nV/ Hz
	en2	fo=100Hz	-	11	-	nV/ Hz
	en3	fo=1kHz	-	10	-	nV/ Hz
	en4	fo=10kHz	-	9	-	nV/ Hz


## ELECTRICAL CHARACTERISTICS

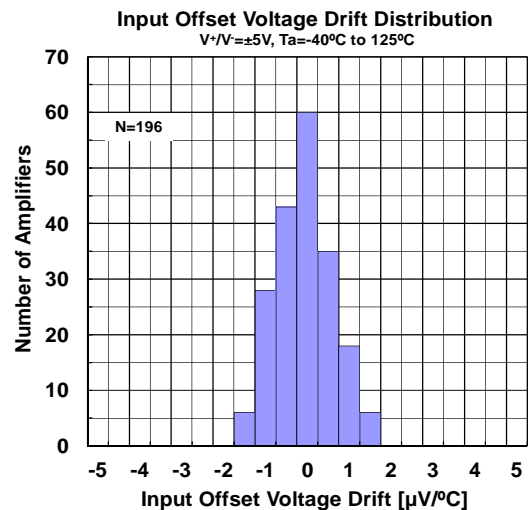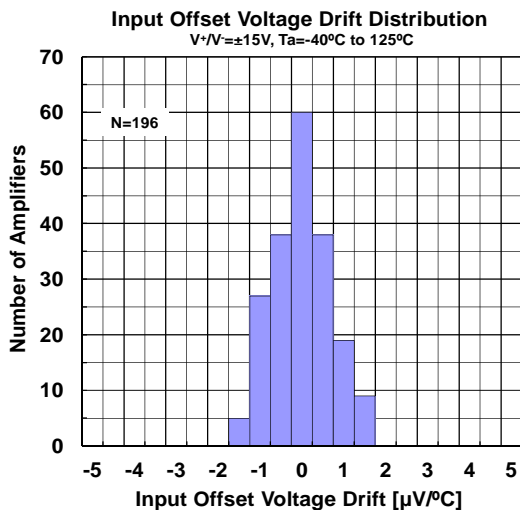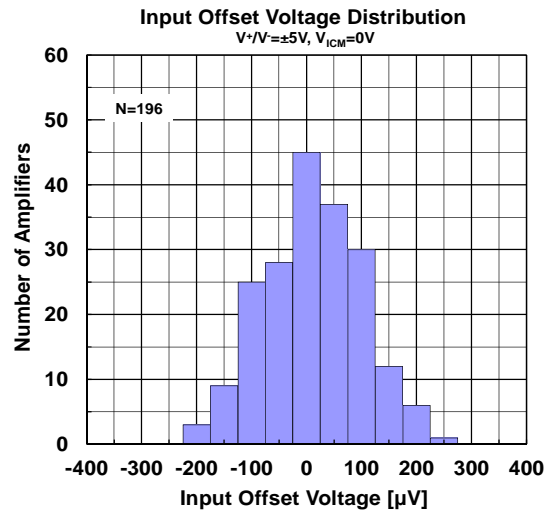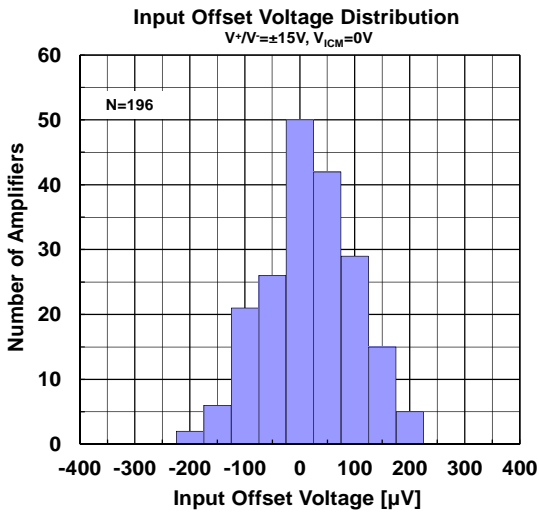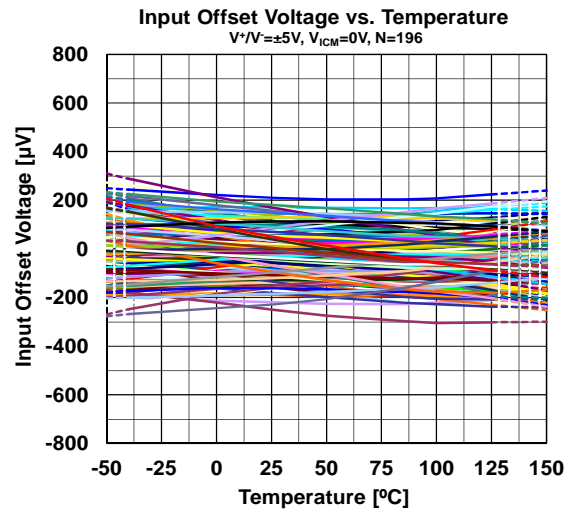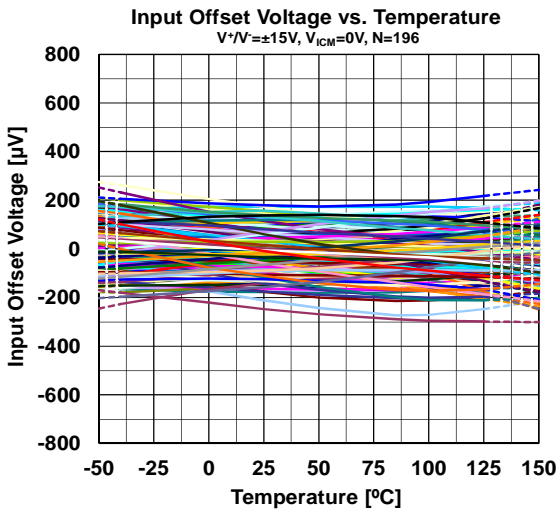

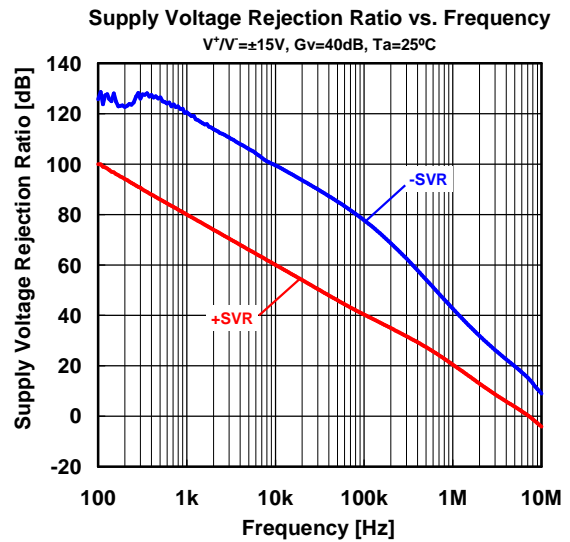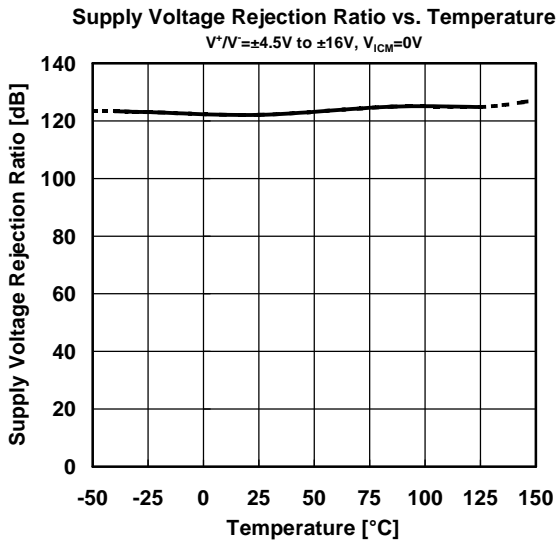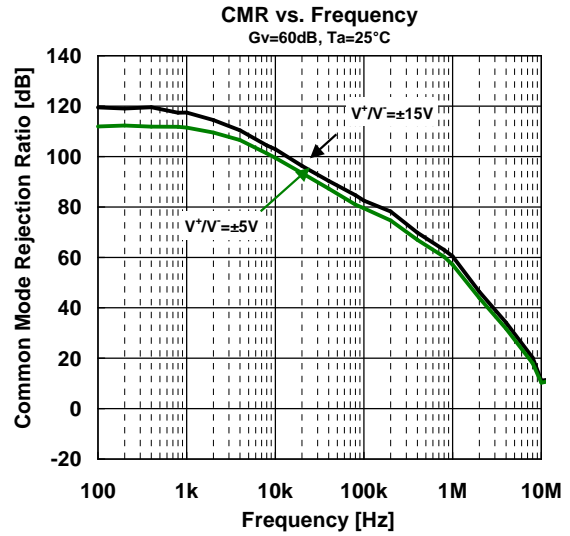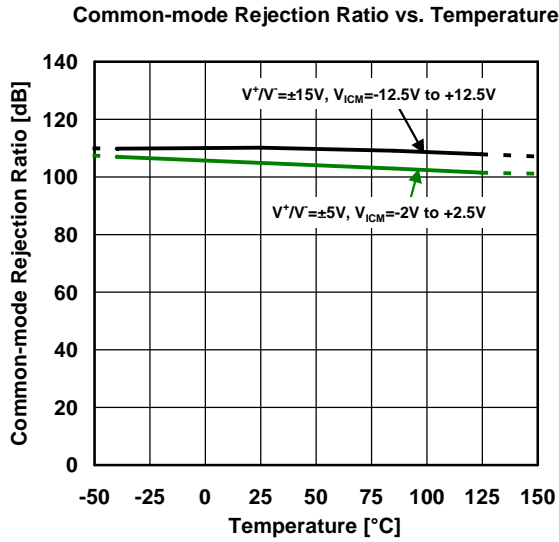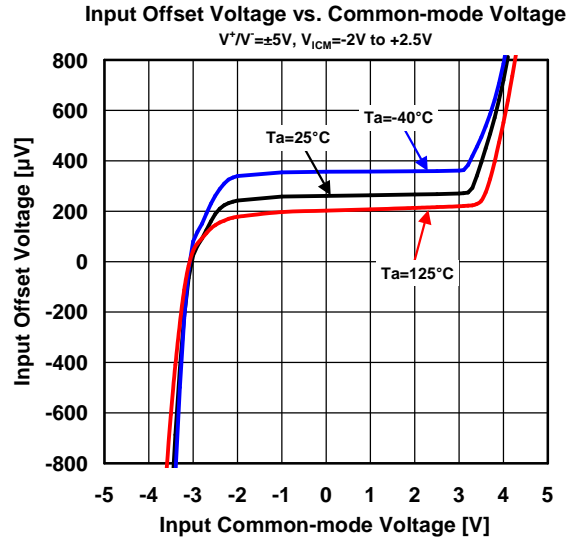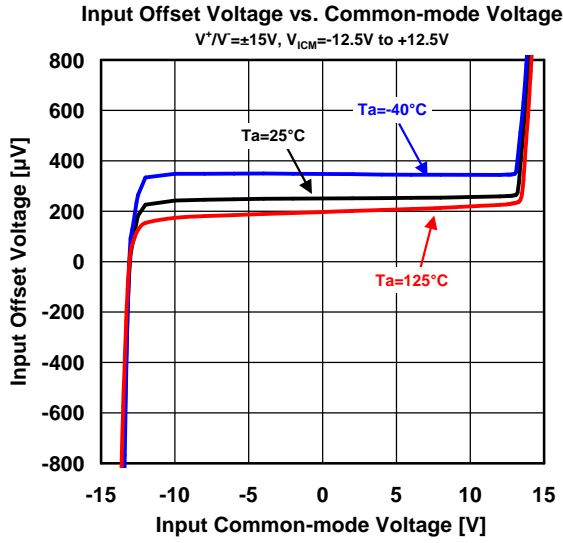


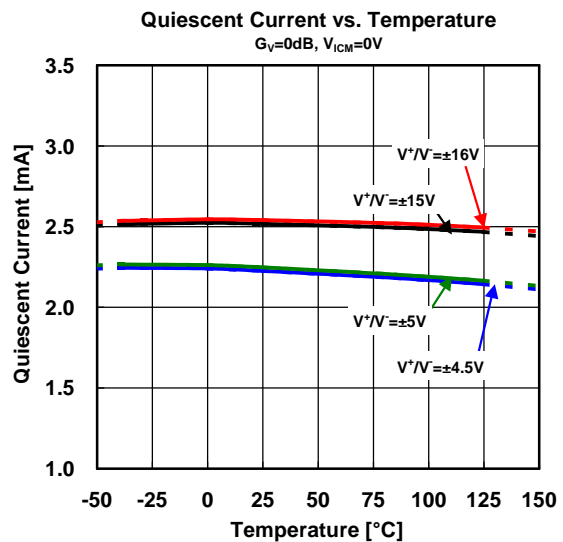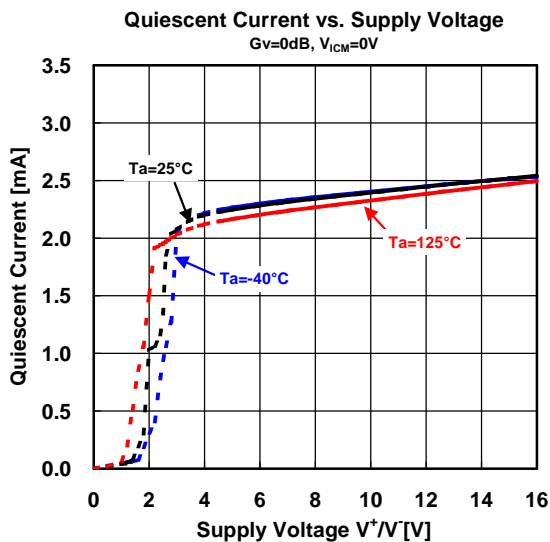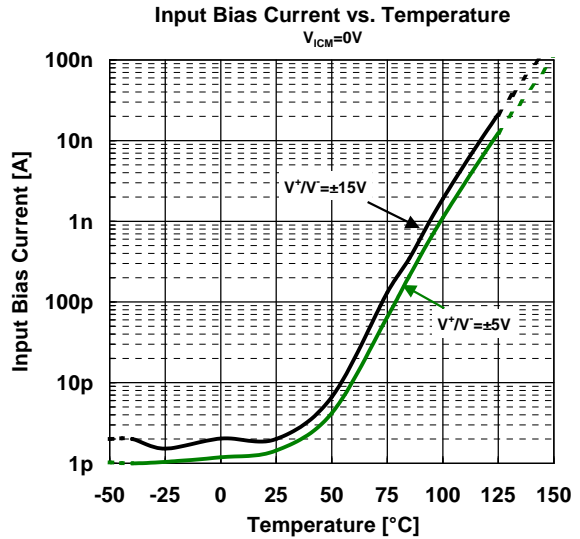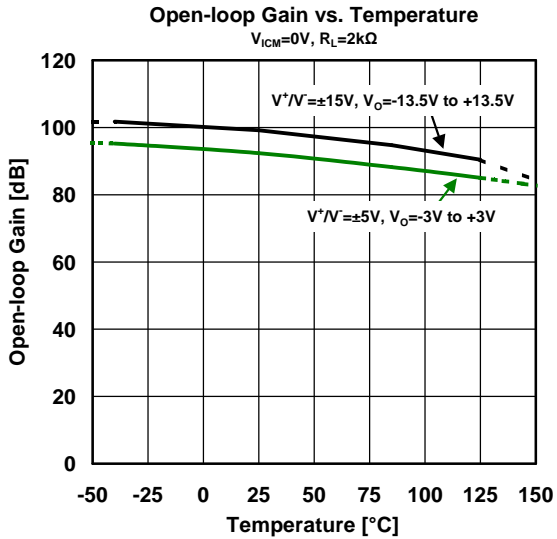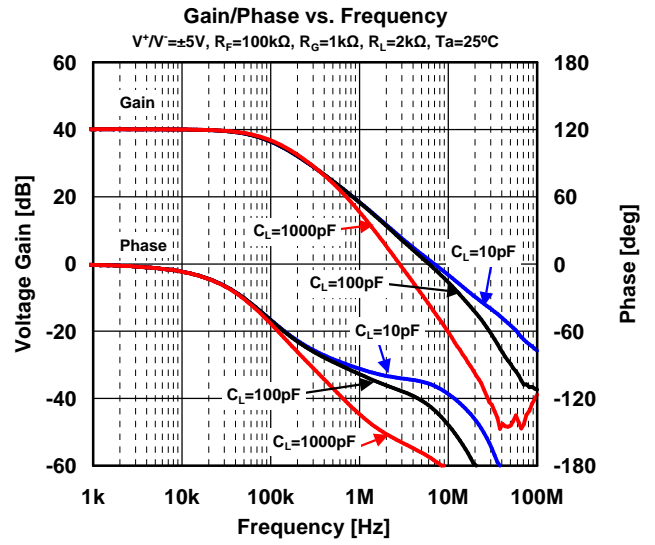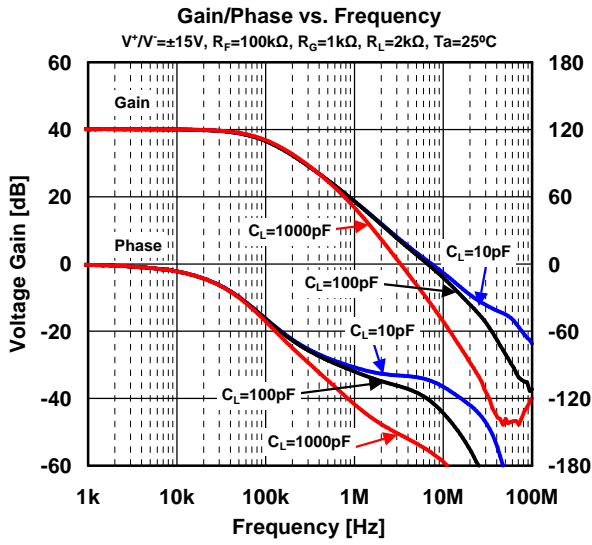


Maximum Output Voltage vs. Load Resistance

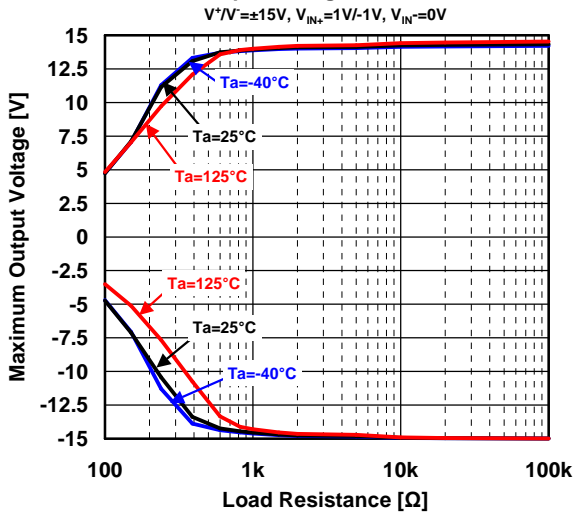


Maximum Output Voltage vs. Load Resistance

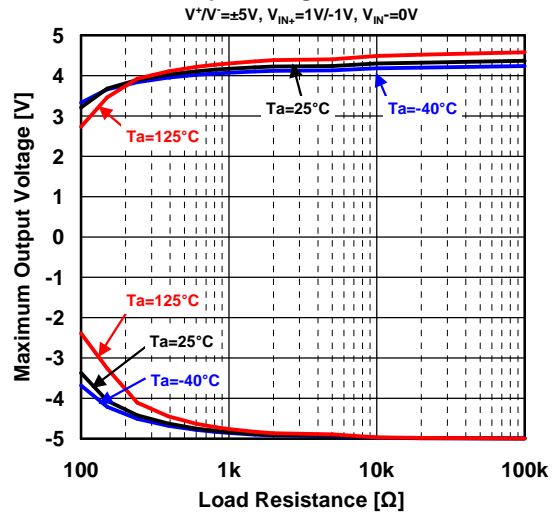


Maximum Output Voltage vs. Temperature

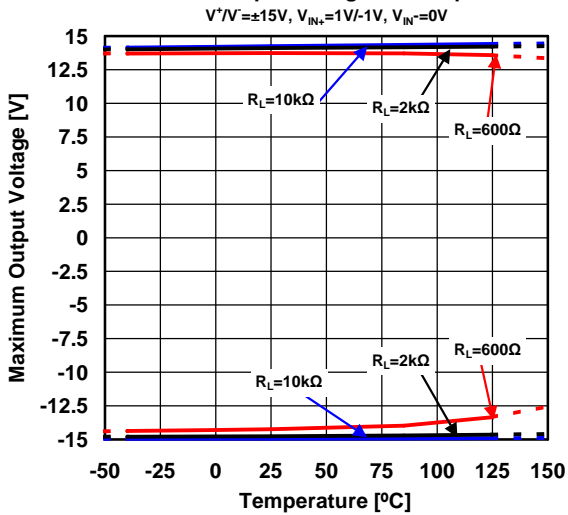


Maximum Output Voltage vs. Temperature

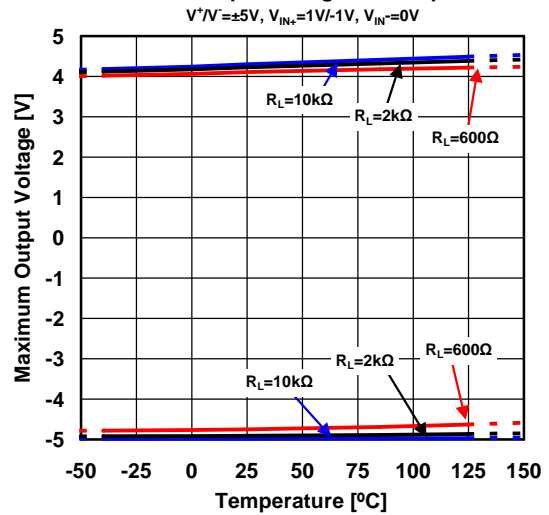

Maximum Output Voltage vs. Output Current

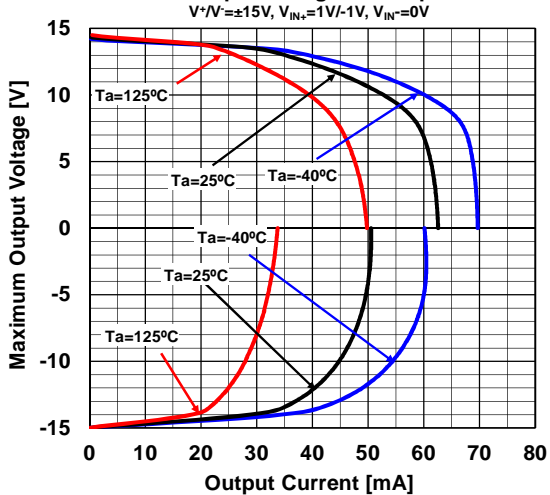


Maximum Output Voltage vs. Output Current

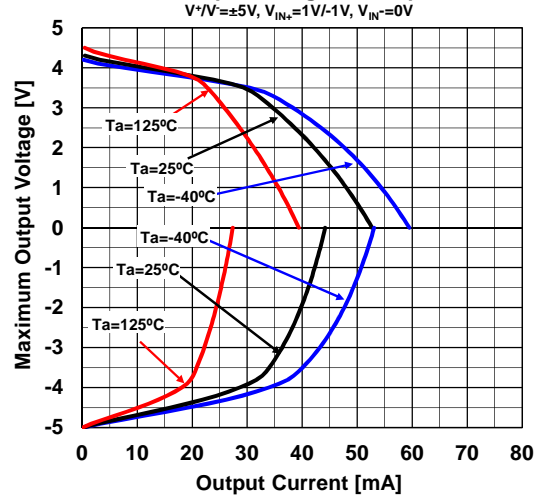




**Small-Signal Step Response (Load Capacitance)**

$V^+/V^- = \pm 15V$ ,  $G_v = 0dB$ ,  $V_{IN} = 1V_{pp}$ ,  $R_L = 2k\Omega$ ,  $T_a = 25^\circ C$

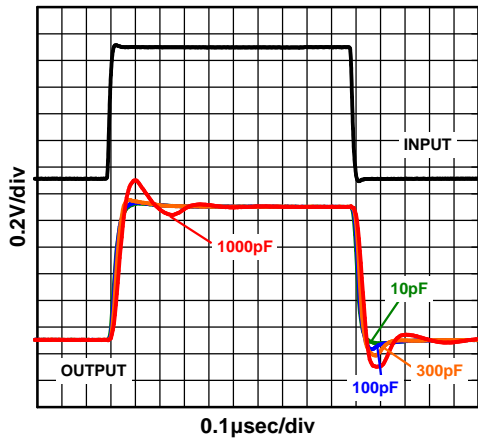


**Small-Signal Step Response (Temperature)**

$V^+/V^- = \pm 15V$ ,  $G_v = 0dB$ ,  $V_{IN} = 1V_{pp}$ ,  $R_L = 2k\Omega$ ,  $C_L = 10pF$

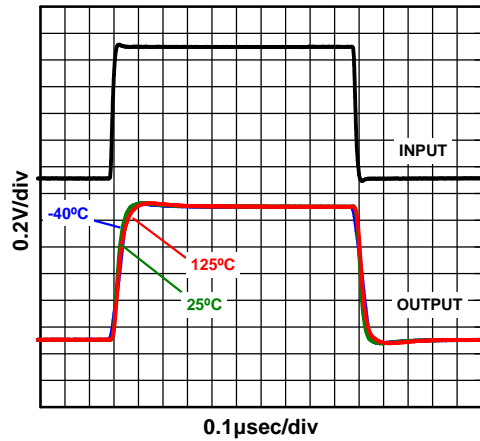


**Large Signal Step Response**

$V^+/V^- = \pm 15V$ ,  $G_v = 0dB$ ,  $V_{IN} = 10V_{pp}$ ,  $R_L = 2k\Omega$

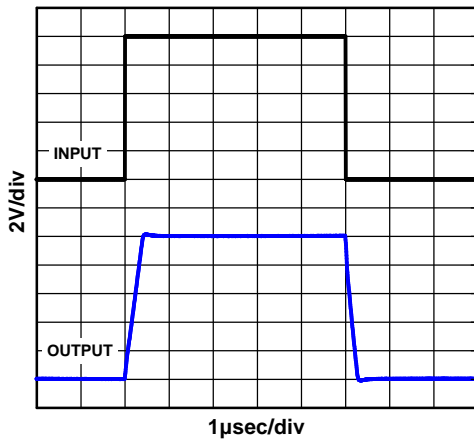


**Input Voltage vs. Output Voltage**

$V^+/V^- = \pm 5V$ ,  $A_v = 0dB$ ,  $R_L = 10k\Omega$

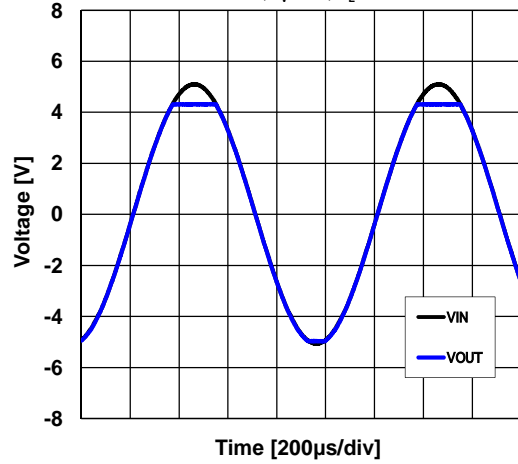


**Short Circuit Output Current**

$V^+/V^- = \pm 15V$ ,  $V_{IN} = 0V$ ,  $V_O = 0V$ ,  $T_a = 25^\circ C$

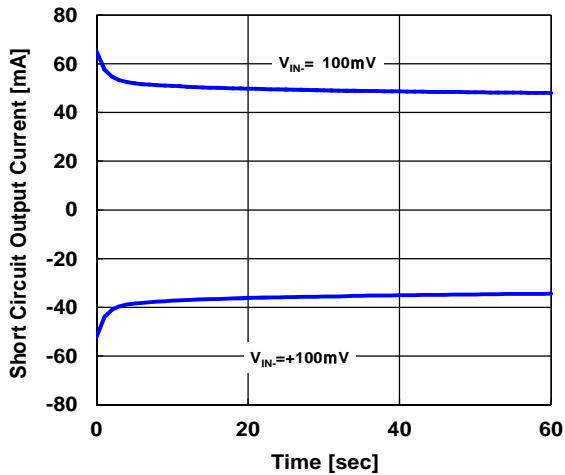


1Hz to 100Hz Input Voltage Noise

$V^*V = \pm 15V$ , 1 to 100Hz BPF

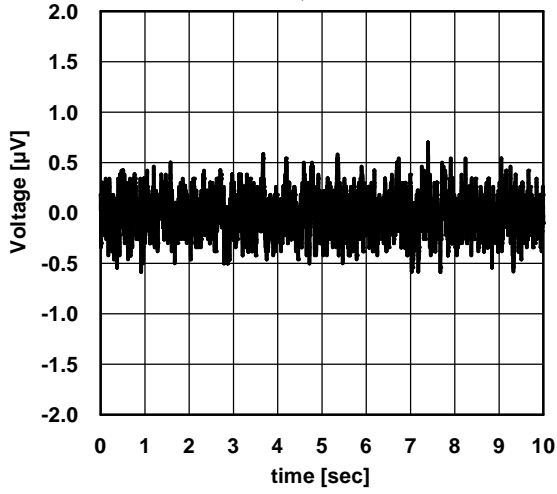


Input Voltage Noise Density vs. Frequency

$G_v = 40dB$ ,  $R_G = 100\Omega$ ,  $R_L = 10k\Omega$ ,  $T_a = 25^\circ C$

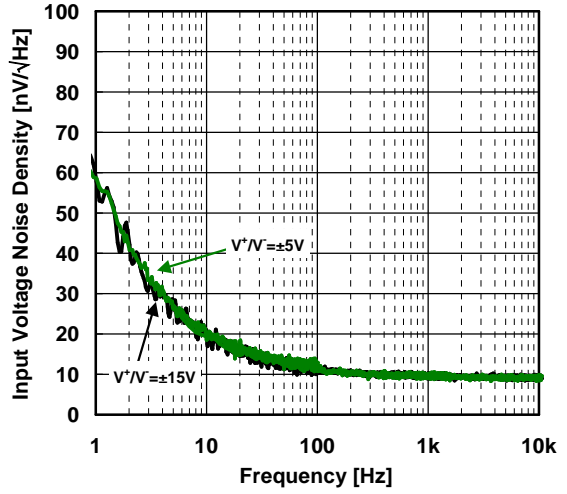


THD + Noise vs. Output Voltage

$V^*V = \pm 15V$ ,  $A_v = +1$ ,  $R_L = 2k\Omega$ ,  $T_a = 25^\circ C$

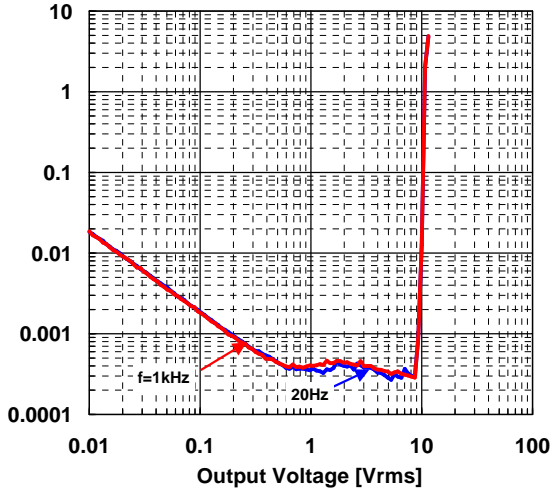




THD + Noise vs. Output Voltage

$V^*V = \pm 5V$ ,  $A_v = +1$ ,  $R_L = 2k\Omega$ ,  $T_a = 25^\circ C$

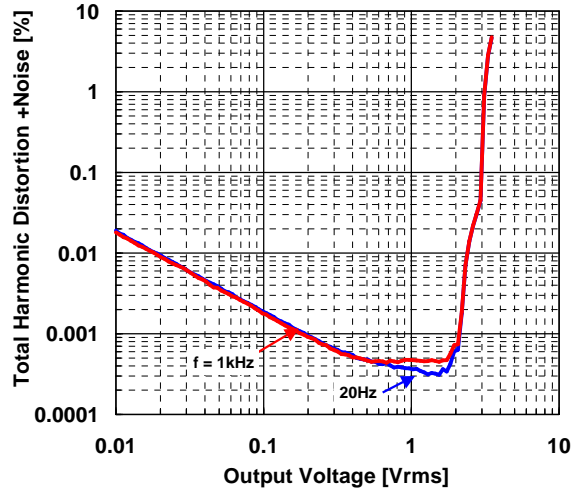

## ■ PACKAGE DIMENSIONS

### MSOP8(VSP8)

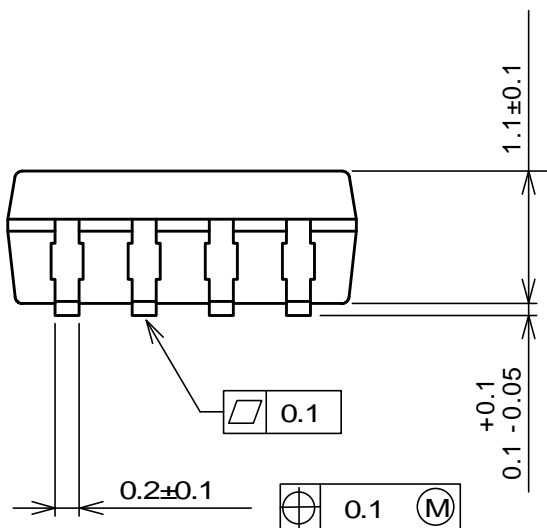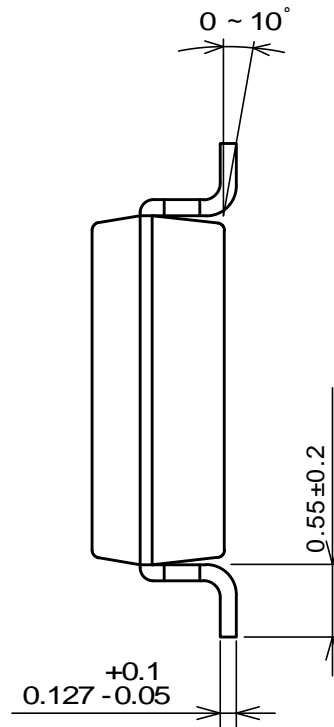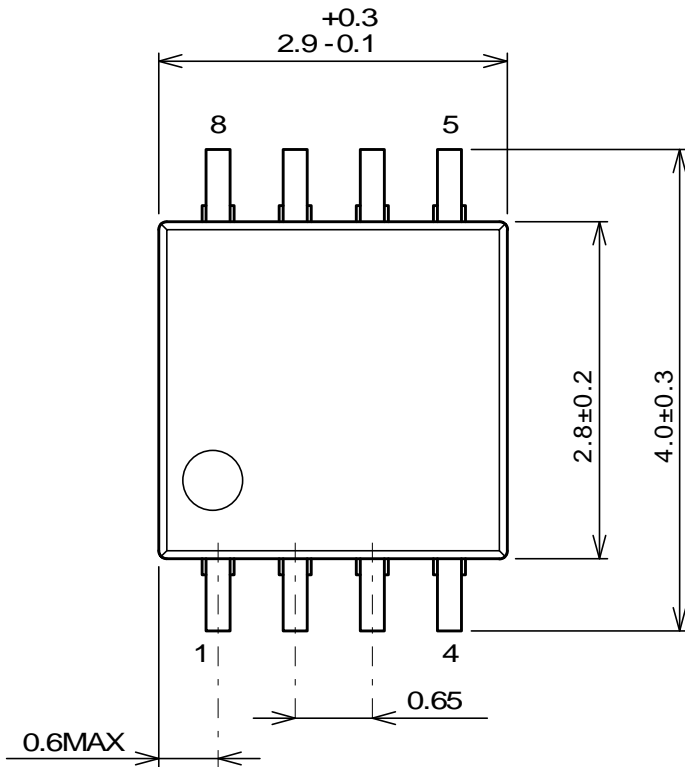


UNIT: mm

# NJM8512

## ■PACKAGE DIMENSIONS

### SOP8 JEDEC 150 mil

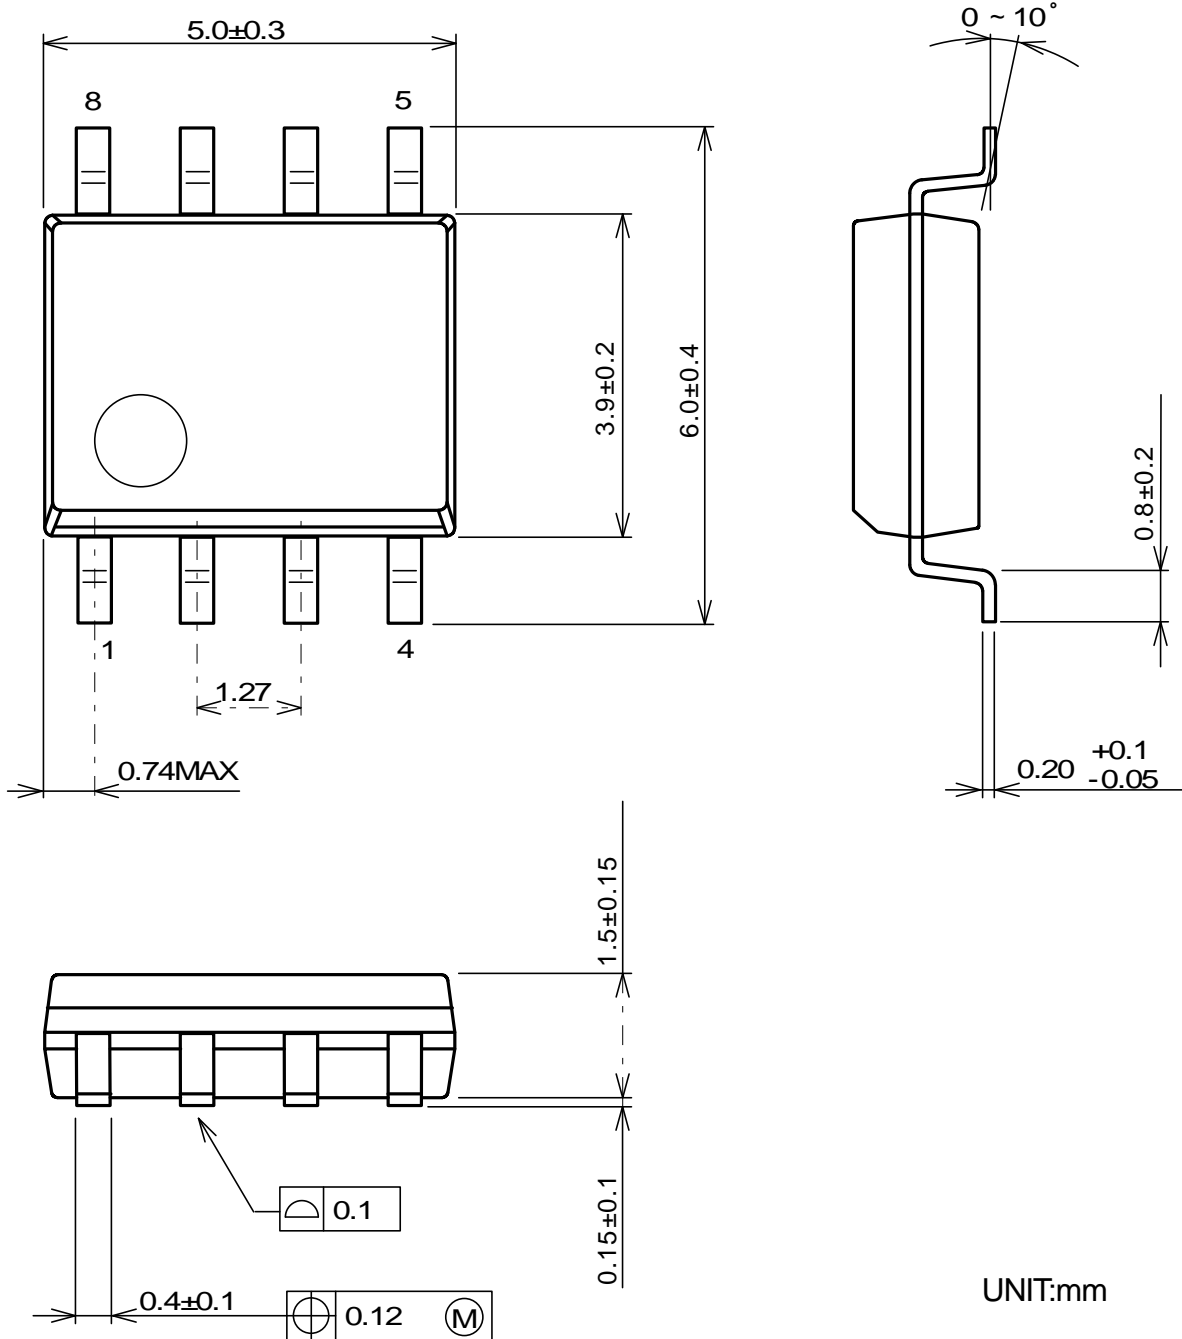

UNIT:mm

[CAUTION]  
 The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM8512AR-TE2](#) [NJM8512BR-TE2](#)