




LMX2531LQ2820E

Evaluation Board Operating Instructions

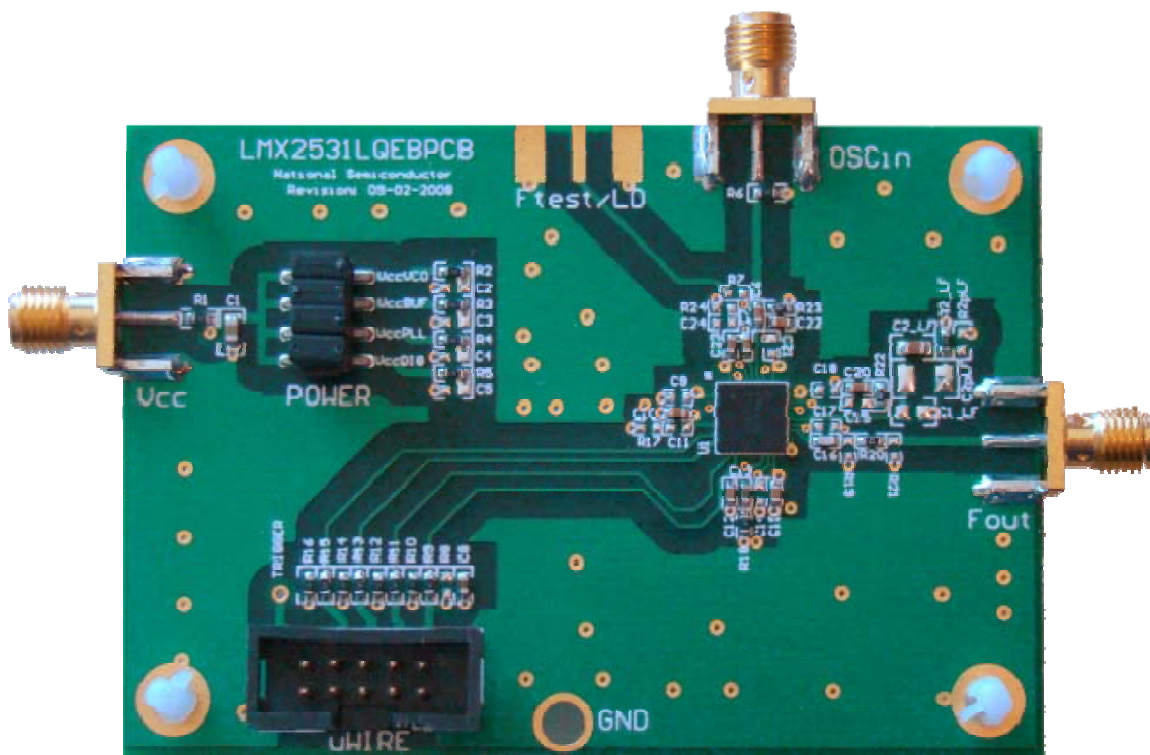

National Semiconductor Corporation
Timing Devices Business Group

10333 North Meridian
Suite 400
Indianapolis, IN 46290


LMX25312820EVAL Instructions Rev 6.24.2009

Table of Contents

Table of Contents	2
Loop Filter	3
Quick Setup.....	3
Troubleshooting	4
SOFTWARE DOES NOT COMMUNICATE WITH THE EVALUATION BOARDS	4
PART RESPONDS TO PROGRAMMING, BUT DOES NOT LOCK TO THE CORRECT FREQUENCY	4
CLOSE-IN PHASE NOISE IS WORSE THAN EVALUATION BOARD INSTRUCTIONS SHOW	4
FAR-OUT PHASE NOISE IS WORSE THAN EVALUATION BOARD INSTRUCTIONS SHOW	5
Device Data.....	5
PHASE NOISE	6
FREE-RUNNING VCO PHASE NOISE (INTERNAL DIVIDE BY 2 DISABLED)	7
FREE-RUNNING VCO PHASE NOISE (INTERNAL DIVIDE BY 2 ENABLED)	8
FRACTIONAL SPURS (INTERNAL DIVIDE BY 2 DISABLED)	9
FRACTIONAL SPURS (INTERNAL DIVIDE BY 2 ENABLED)	10
INTEGER SPURS (INTERNAL DIVIDE BY 2 DISABLED)	11
INTEGER SPURS (INTERNAL DIVIDE BY 2 ENABLED)	12
IN-BAND FACTIONAL SPURS INTEGER SPURS (INTERNAL DIVIDE BY 2 DISABLED)	13
IN-BAND FACTIONAL SPURS INTEGER SPURS (INTERNAL DIVIDE BY 2 ENABLED)	14
Inter-modulation Spurs	15
CodeLoader Settings	16
SELECT DEVICE.....	16
BITS/PINS	18
PLL/VCO	19
REGISTERS	20
PORT SETUP	21
Schematic	22
Bill of Materials	23
Top Layer.....	24
Mid Layer 1 "Ground Plane"	25
Mid Layer 2 "Power"	26
Bottom Layer "Signal"	27
Top Build Diagram	28

Loop Filter

Loop Bandwidth	14 kHz	K_Φ	1440 uA (16X)
Phase Margin	54.1 °	F_{PD}	10 MHz
Crystal Frequency	10 MHz	Output Frequency	2710 to 2925 MHz (DIV2=0) 1355 to 1462 MHz (DIV2=1)
Supply Voltage	3.0 Volts	VCO Gain	12 to 28 MHz/Volt

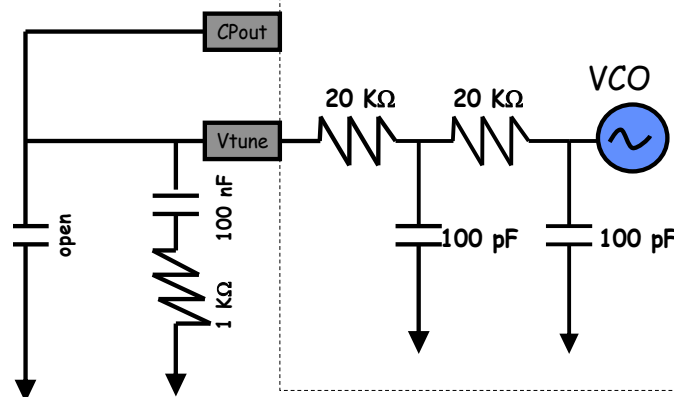

Quick Setup

- Install the CodeLoader software which is available at www.national.com/timing/software/.
- Attach the parallel cable or USB <--> uWire cable to the computer and the evaluation board.
- Connect 3.0 volts to the **Vcc** connector.
- Connect the **Fout** connector to a spectrum analyzer or phase noise analyzer.
- Connect a clean 10 MHz source to the **OSCin** pin. Typically, the 10 MHz output from the back of the RF test equipment is a good source. Signal generators tend to be very noisy and should be used with caution. If a signal generator is used, the signal generator phase noise contribution can be reduced by setting the signal to 80 MHz and dividing this down to a phase detector frequency of 10 MHz.
- Set up the CodeLoader software.
 - Select the proper part from the menu as Select Part->PLL+VCO->LMX2531LQ2820E
 - Select the proper mode from the Mode menu.
 - Load the part by pressing Ctrl+L or selecting Keyboard Controls->Load Device from the menu.
- It is recommended to ensure proper communication with the device.
 - Click the REG_RST bit on the bits/pins page and observe the current go to 0 mA.
 - Unlick the REG_RST bit AND press Ctrl+L. The current should be approximately 35 mA.
 - If device does not respond to this, consult the troubleshooting section.

Troubleshooting

Software does not communicate with the evaluation boards

LPT or USB Mode

- Ensure a valid signal is presented to the **OSCin** connector. If a signal generator is used, ensure the RF is ON.
- Consult the CodeLoader instructions for more detailed information on communication issues.

LPT Mode (Uses Parallel Port Cable)

- Ensure that CodeLoader is selected to LPT mode on the Port Setup tab
- Ensure the proper port number is selected (LPT1, LPT2, LPT3). CodeLoader does NOT automatically detect this.
- Ensure the LPT cable is securely connected to the computer and board.
- Exit and Restart CodeLoader.
- Ensure the parallel port is in the correct mode.
 - Windows often requires Administrative access to write to the parallel port.
 - Ensure that the parallel port is set to "Enabled" in windows device manager.
 - A reboot upon installation of CodeLoader is sometimes necessary to get the parallel port to work.
 - Standard mode is the most reliable. This can be set in the BIOS mode of the computer as "Normal", "Output Only", or "AT."

USB Mode (Uses USB <=> uWire Interface Board, NSID = USB2UWIRE)

- On the menu, select LPT/USB->Version to verify communication with the board.
- Ensure the Green LEDs are lit on the USB board.
- Ensure there are no conflicts with other USB devices and reinstall the board.

Part responds to programming, but does not lock to the correct frequency

- Ensure that there is a valid signal presented to the **OSCin** connector. If a signal generator is used, ensure that the RF is set to ON.
- If using the lower frequency band (DIV2=1), the VCO frequency in CodeLoader should be twice the frequency at the Fout pin.
- Ensure that the VCO FREQUENCY CAL bits on the Bits/Pins tab are correct.
- Ensure that the loop filter is optimized if the charge pump current, phase detector frequency, or loop filter values have been changed from their original settings. Ensure that the integrated loop filter components on CodeLoader are set to their proper settings.

Close-in phase noise is worse than evaluation board instructions show

- Ensure the signal presented to OSCin connector is clean. Try another source, or if it is a signal generator, try using a higher frequency and dividing it down to the phase detector frequency.
- Ensure the OSCin signal after the connecting cable provides sufficient power level.
- If the phase detector frequency or charge pump current are lowered from their original settings, the in-band phase noise can be degraded, even if the loop filter is re-designed for the same loop bandwidth.
- If the loop bandwidth is decreased, in-band phase noise can be degraded.

Far-out Phase noise is worse than evaluation board instructions show


- Ensure the measurement equipment noise floor is not limiting the measurement. For spectrum analyzers, the noise floor at a particular setting can be measured by removing the RF input signal
- If the settings are changed from what the board was designed for, ensure the delta-sigma modulator is not increasing the far-out noise. To determine this, tune to an integer channel and set the ORDER bit to “Reset Modulator”. The far out phase noise should not decrease. If it does, try a loop filter with more attenuation or select a lower order delta-sigma modulator.

Device Data


The next few pages show data collected from the LMX2531LQ2820 evaluation board.

Phase Noise

Output Frequency = 2820.25 MHz
Internal Divide by 2 Disabled (DIV2=0)

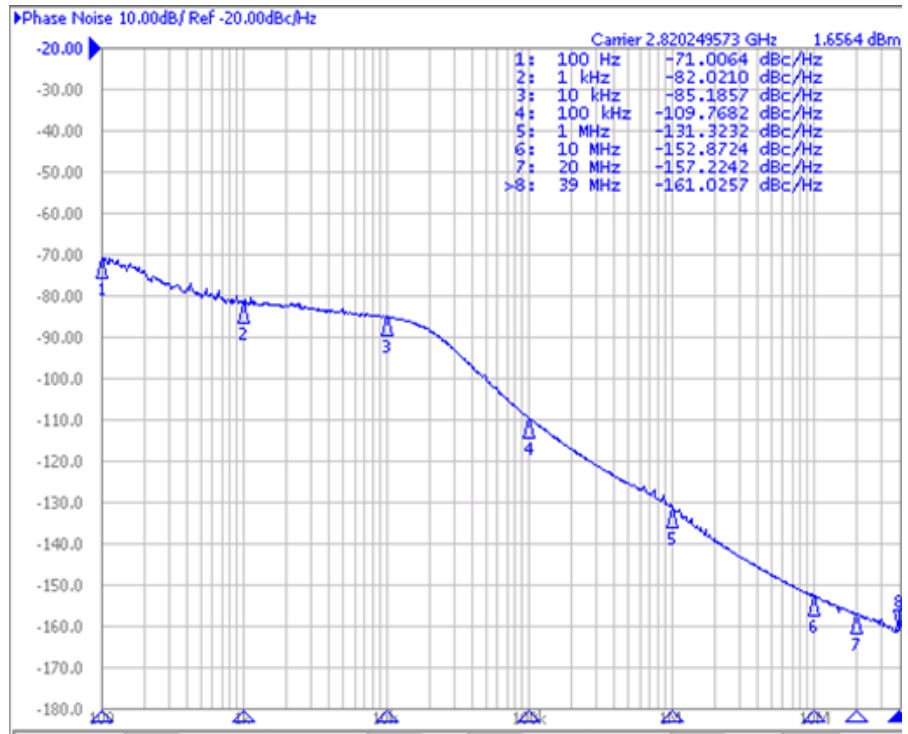


Output Frequency = 1410.125 MHz
Internal Divide by 2 Enabled (DIV2=1)

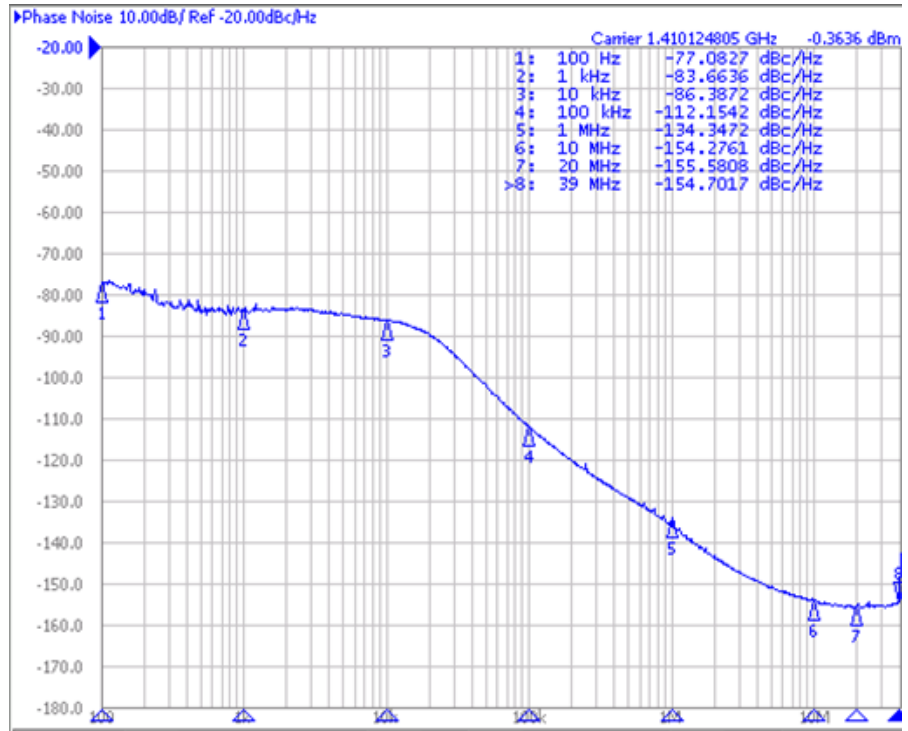


Free-Running VCO Phase Noise (Internal Divide by 2 Disabled)


Fout = ~2710 MHz

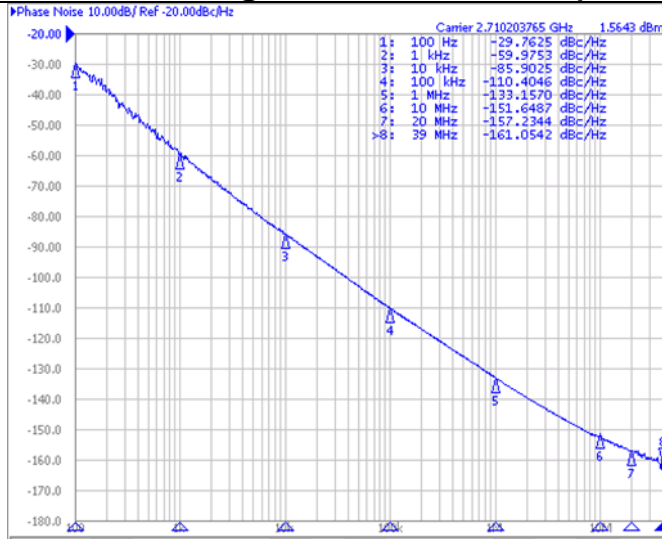

Fout = ~2820 MHz

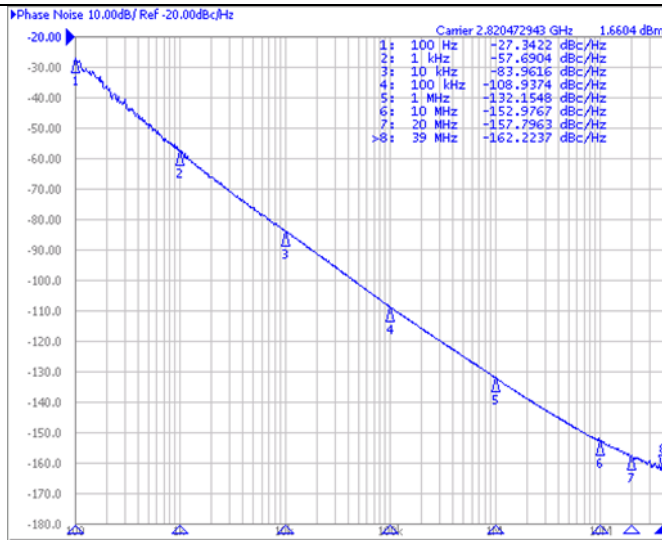


Fout = ~2920 MHz

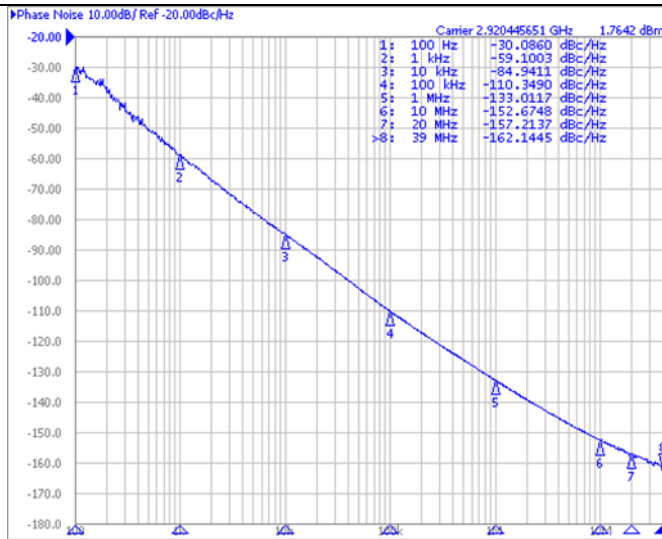


The plots to the left show the true phase noise capability of the VCO. In order to take these plots, the E5052 phase noise analyzer was used. The method was to lock the PLL to the proper frequency, then disable the EN_PLL, EN_PLLLDO1, EN_PLLLDO2, EN_DIGLDO, and EN_OSC bits. The equipment needs to be able to track the VCO phase noise to measure in this way, and one can not let the VCO drift too far off in frequency. If this kind of equipment is not available, the VCO phase noise can also be measured by making a very narrow loop bandwidth filter.

Free-Running VCO Phase Noise (Internal Divide by 2 Enabled)


Fout = ~1355 MHz (~2710 MHz/2)

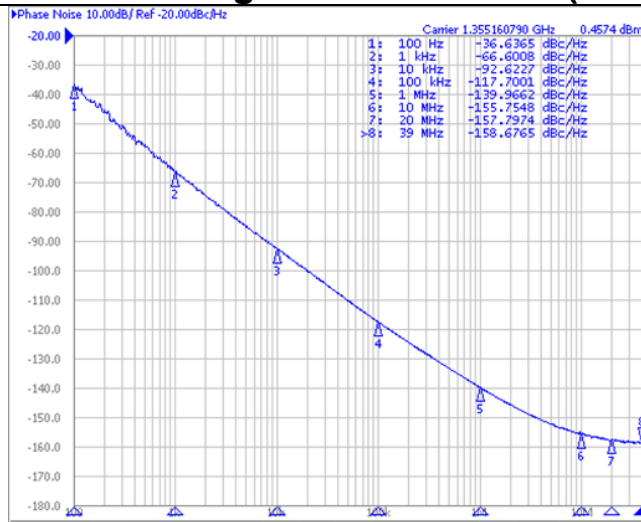

Fout = ~1410 MHz (~2820 MHz/2)

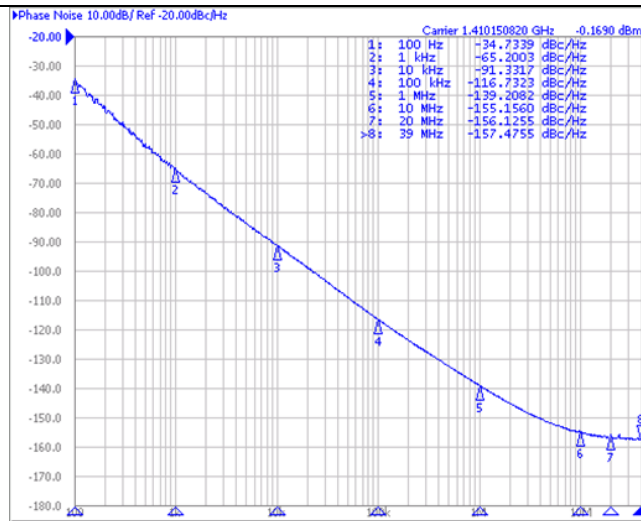


Fout = ~1460 MHz (~2920 MHz/2)

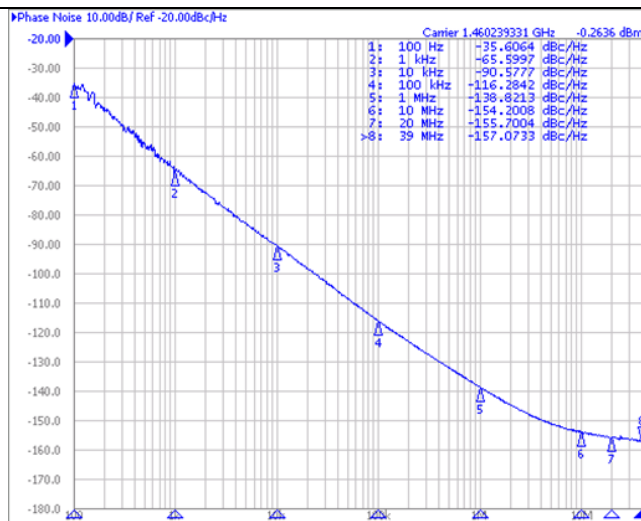

The plots to the left show the true phase noise capability of the VCO. In order to take these plots, the E5052 phase noise analyzer was used. The method was to lock the PLL to the proper frequency, then disable the EN_PLL, EN_PLLLDO1, EN_PLLLDO2, EN_DIGLDO, and EN_OSC bits. The equipment needs to be able to track the VCO phase noise to measure in this way, and one can not let the VCO drift too far off in frequency. If this kind of equipment is not available, the VCO phase noise can also be measured by making a very narrow loop bandwidth filter.


When divide by 2 is enabled, the phase noise at lower offsets is about 6 dB better; but at high offsets, the phase noise improvement may be less because the divider noise floor is adding to the phase noise.

Fractional Spurs (Internal Divide by 2 Disabled)

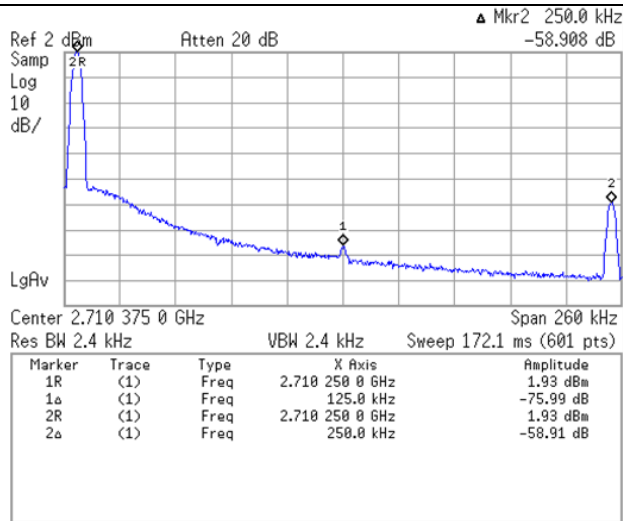


The -58.9 dBc fractional spur at 250 kHz offset is at a worst case frequency of 2710.25 MHz. The -76.0 dBc sub-fractional spur at 125 kHz offset is also visible.

Worst case channels occur at exactly one channel spacing above or below a multiple of the crystal frequency.

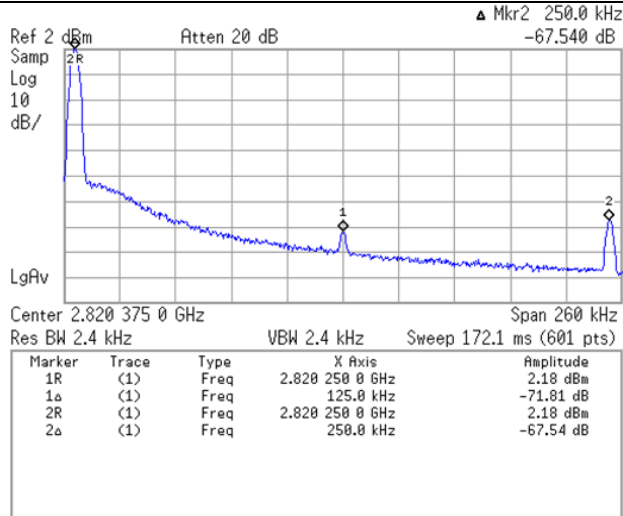

The -67.5 dBc fractional spur at 250 kHz offset is at a worst case frequency of 2820.25 MHz. The -71.8 dBc sub-fractional spur at 125 kHz offset is also visible.


Worst case channels occur at exactly one channel spacing above or below a multiple of the crystal frequency.

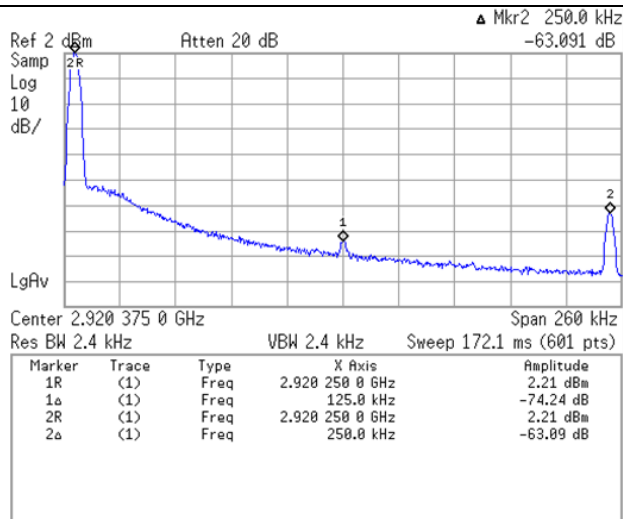


The -63.1 dBc fractional spur at 250 kHz offset is at a worst case frequency of 2920.25 MHz. The -74.2 dBc sub-fractional spur at 125 kHz offset is also visible.

Worst case channels occur at exactly one channel spacing above or below a multiple of the crystal frequency.


Fractional Spurs (Internal Divide by 2 Enabled)

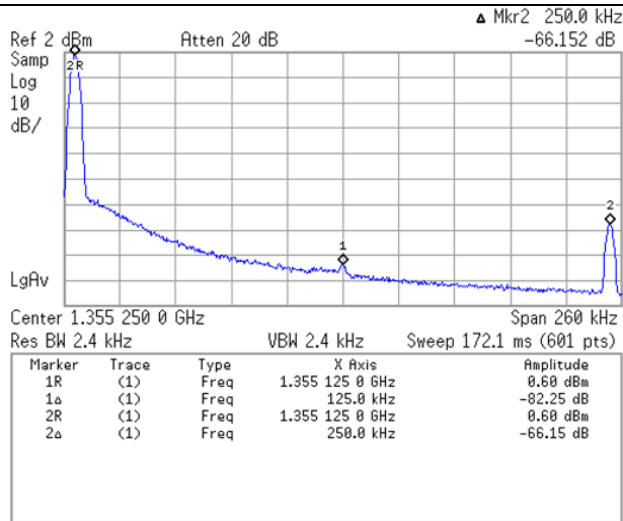

The -66.2 dBc fractional spur at 250 kHz offset is at a worst case frequency of 1355.125 MHz. The -82.2 dBc sub-fractional spur at 125 kHz offset is also visible.

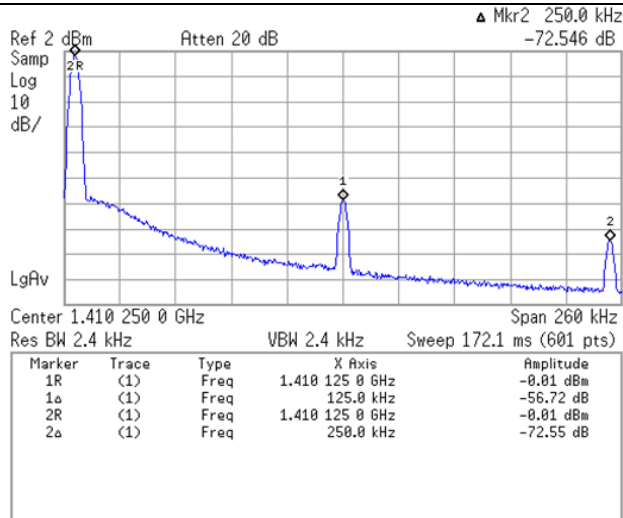


The -72.6 dBc fractional spur at 250 kHz offset is at a worst case frequency of 1410.125 MHz. The -56.7 dBc sub-fractional spur at 125 kHz offset is also visible.

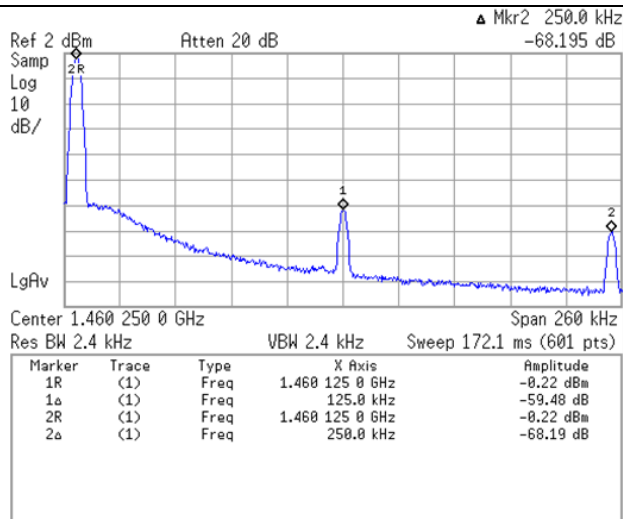


The -68.2 dBc fractional spur at 250 kHz offset is at a worst case frequency of 1460.125 MHz. The -59.5 dBc sub-fractional spur at 125 kHz offset is also visible.


Integer Spurs (Internal Divide by 2 Disabled)

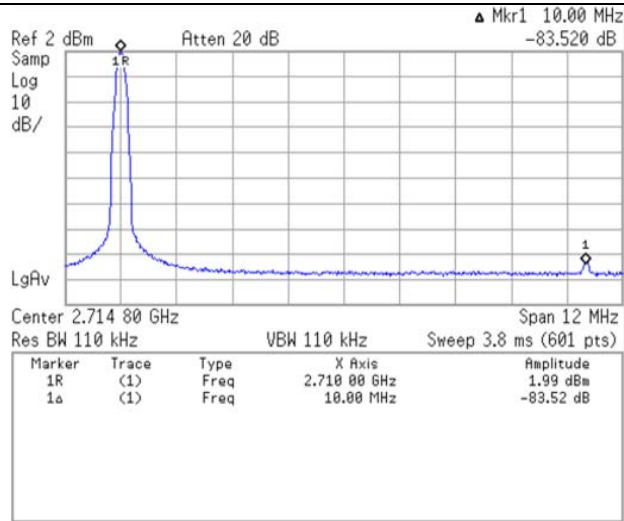

The integer spur at 10 MHz offset at an Fout frequency of 2710 MHz is -83.5 dBc.

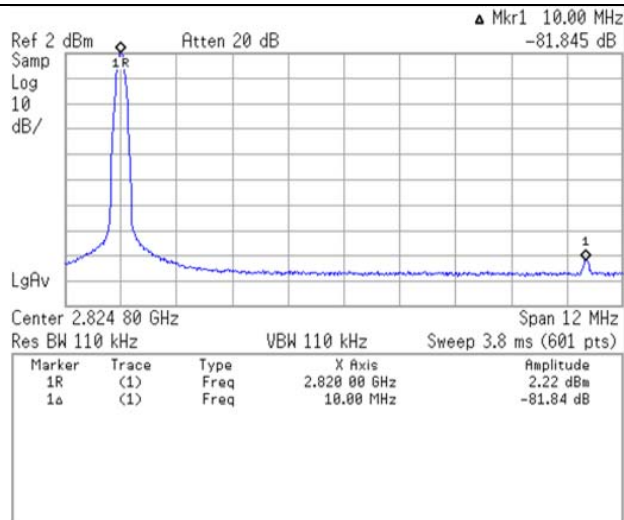


The integer spur at 10 MHz offset at an Fout frequency of 2820 MHz is -81.8 dBc.

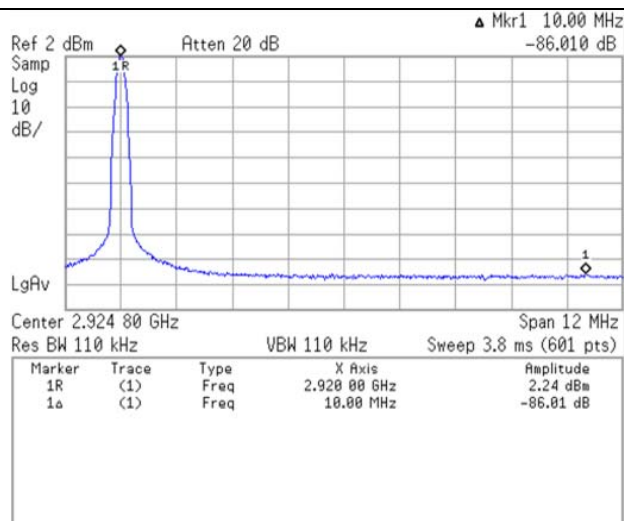


The integer spur at 10 MHz offset at an Fout frequency of 2920 MHz is -86.0 dBc.


Integer Spurs (Internal Divide by 2 Enabled)

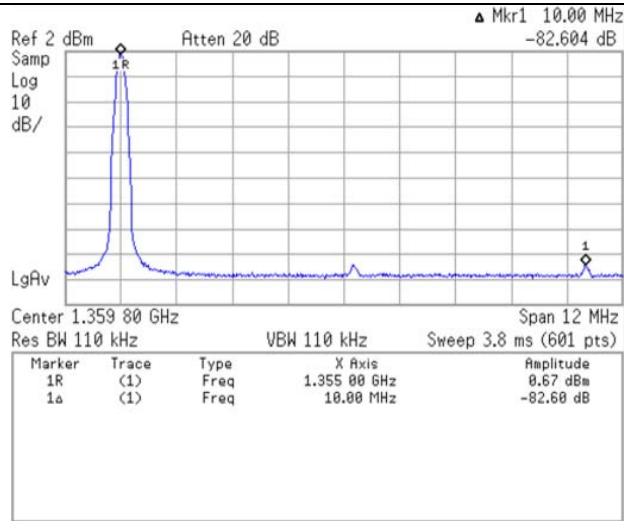

The integer spur at 10 MHz offset at an Fout frequency of 1355 MHz is -82.6 dBc.

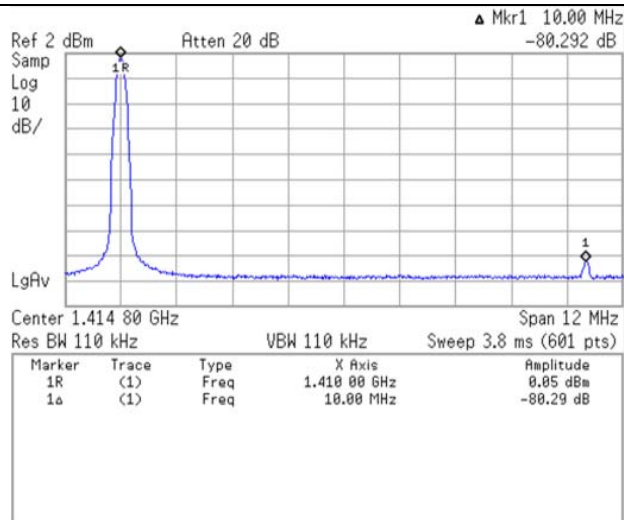


The integer spur at 10 MHz offset at an Fout frequency of 1410 MHz is -80.3 dBc.

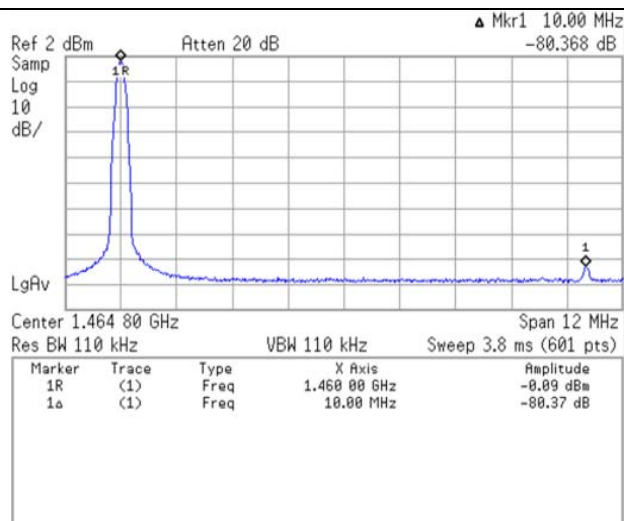

The integer spur at 10 MHz offset at an Fout frequency of 1460 MHz is -80.4 dBc.

In-band Fractional Spurs Integer Spurs (Internal Divide by 2 Disabled)

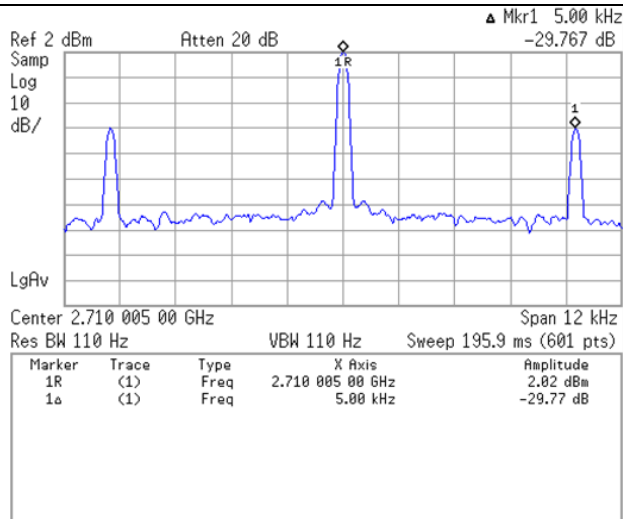


The In-band fractional spur at 5 kHz offset at an Fout frequency of 2710.005 MHz is -29.8 dBc.

ORDER = 4th Order Modulator

Fractional numerator = 500

Fractional denominator = 1,000,000

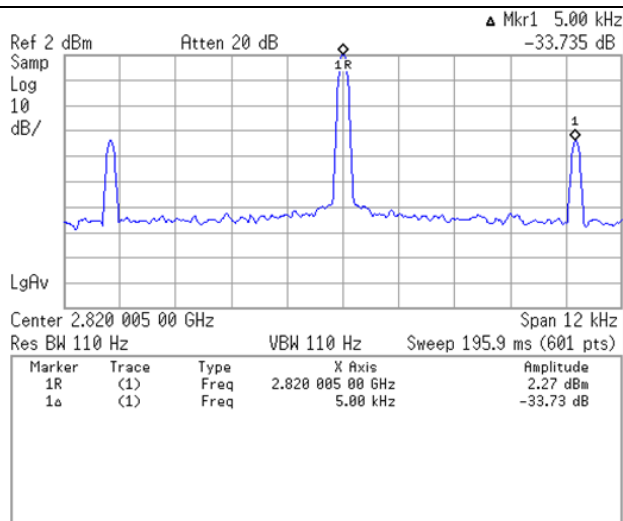


The In-band fractional spur at 5 kHz offset at an Fout frequency of 2820.005 MHz is -33.7 dBc.

ORDER = 4th Order Modulator

Fractional numerator = 500

Fractional denominator = 1,000,000

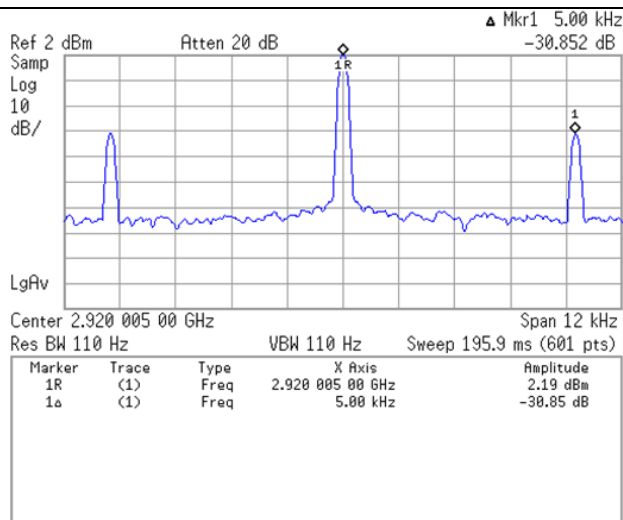


The In-band fractional spur at 5 kHz offset at an Fout frequency of 2920.005 MHz is -30.8 dBc.

ORDER = 4th Order Modulator

Fractional numerator = 500

Fractional denominator = 1,000,000

In-band Fractional Spurs Integer Spurs (Internal Divide by 2 Enabled)

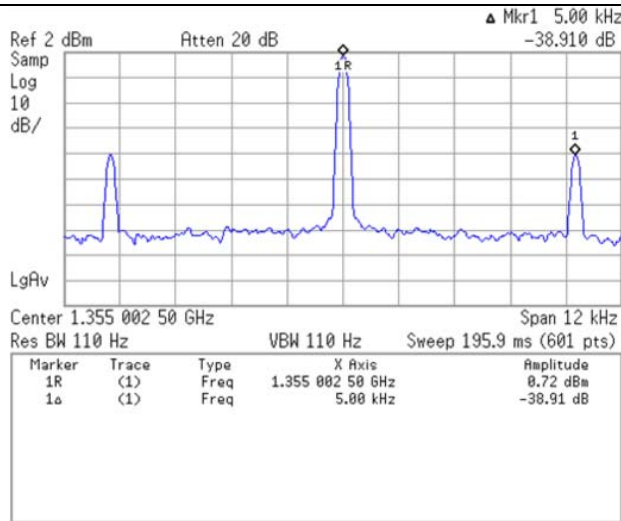


The In-band fractional spur at 5 kHz offset at an Fout frequency of 1355.0025 MHz is -38.9 dBc.

ORDER = 4th Order Modulator

Fractional numerator = 500

Fractional denominator = 1,000,000

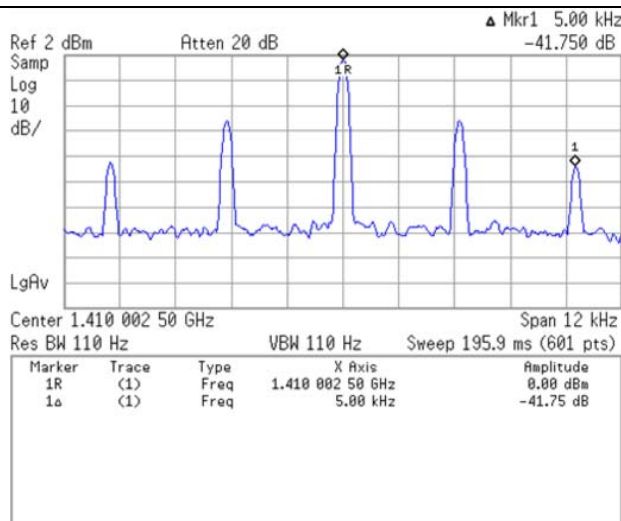


The In-band fractional spur at 5 kHz offset at an Fout frequency of 1410.0025 MHz is -41.8 dBc.

See inter-modulation spur note on next page.

ORDER = 4th Order Modulator

Fractional numerator = 500

Fractional denominator = 1,000,000

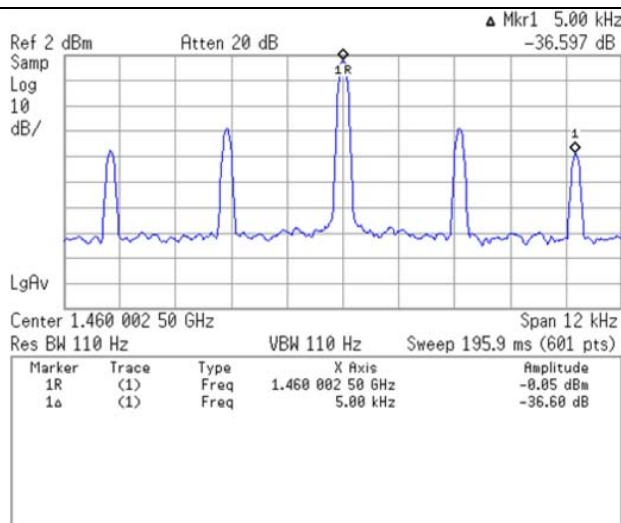

The In-band fractional spur at 5 kHz offset at an Fout frequency of 1460.0025 MHz is -36.6 dBc.

See inter-modulation spur note on next page.

ORDER = 4th Order Modulator

Fractional numerator = 500

Fractional denominator = 1,000,000

Inter-modulation Spurs

The LMX2531 features an output divider which may divide the VCO frequency by two. The result is an F_{out} frequency half the VCO frequency. When this VCO divider is enabled a spur will occur between a multiple of the phase detector frequency and the F_{out} frequency.

In the example below the phase detector frequency (F_{PD}) is 10 MHz. The VCO frequency is 2820.005 MHz. The divide by two is enabled and the output frequency (F_{out}) is 1410.0025 MHz

1410 MHz = 10 MHz * 141, which is a multiple of the F_{PD} .

1410.0025 MHz is the divided output frequency.

Therefore a spur will occur at 2.5 kHz offset = (1410.0025 – 1410 MHz)

If the frequency was set to 1409.9975 MHz there would be a spur at 2.5 kHz because:


1410 MHz = 10 MHz * 141, which is a multiple of the F_{PD} .

1409.9975 MHz is the divided output frequency.

Therefore a spur will occur at 2.5 kHz offset = (1409.9975 – 1410 MHz)


Technically there are spurs at caused by mixing with all multiples of the phase detector frequency but they will be far away from the carrier and the loop filter will eliminate them.

The spur shown below at 2.5 kHz off from 1400.0025 MHz is an example of inter-modulation that occurs. This only happens when the VCO divider is enabled.

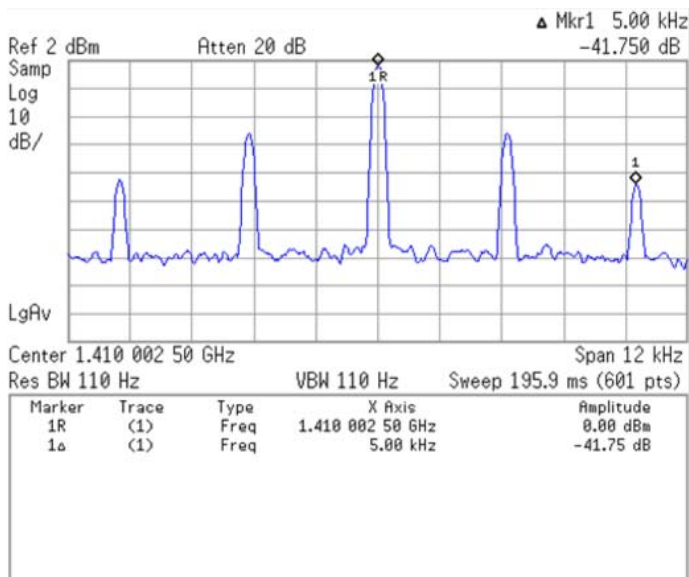


CodeLoader Settings

Select Device

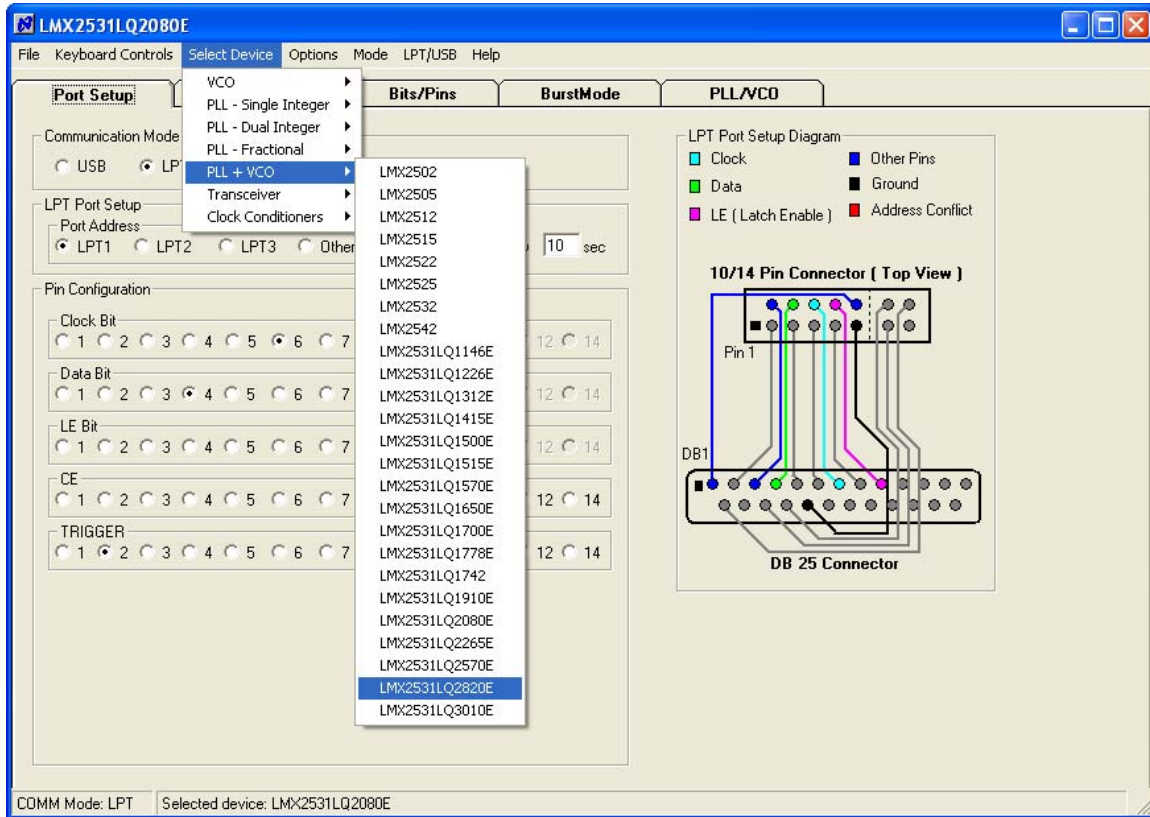

CodeLoader runs many devices. When CodeLoader is first started, it is necessary to select the correct device.

Select Mode

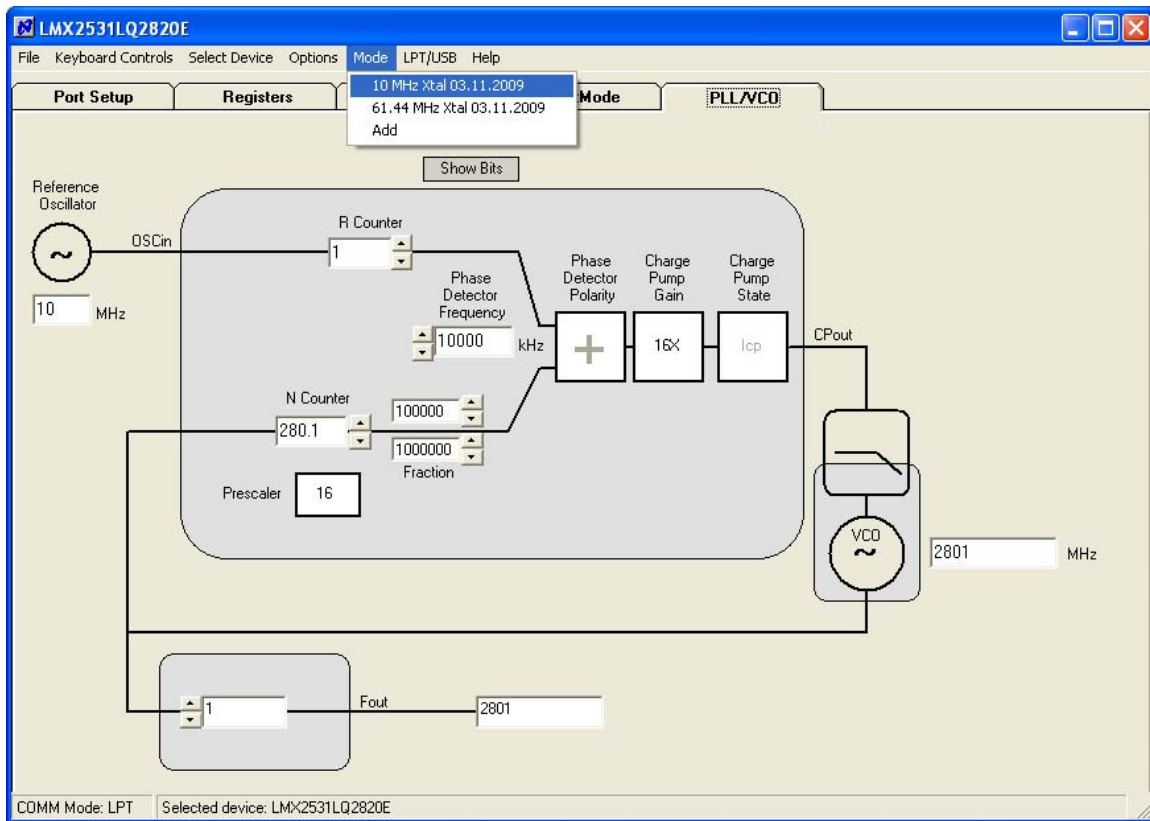

There can be different modes defined for a particular part. A mode can be recalled easily from the menu. This restores bit settings and frequencies, but not the Port Setup information. For the CodeLoader program, the default reference oscillator used for these instructions was 10 MHz, but there is a mode for a 61.44 MHz oscillator as well. If the bits become scrambled, their original state may be recalled by choosing the appropriate mode.

Bits/Pins


The screenshot shows the LMX2531LQ2820E software interface with the 'Bits/Pins' tab selected. The interface is divided into several sections:

- INITIALIZATION:** Includes a checkbox for 'REG_RST'.
- POWER CONTROLS:** Includes checkboxes for 'EN_PLL', 'EN_PLLLD01', 'EN_PLLLD02', 'EN_DIGLDO', 'EN_VCO', 'EN_VCOLDO', and 'EN_OSC'.
- VCO PN OPTIMIZATION:** Includes a dropdown for 'VCO_ACISEL' set to '6'.
- VCO FREQUENCY CAL:** Includes a checkbox for 'XTLMAN2', a text field for 'XTLMAN' set to '23', a dropdown for 'LOCKMODE' set to 'Mixed Mode', a dropdown for 'XTLSEL' set to 'Manual Mode', and a dropdown for 'XTLDIV' set to 'Divide by 2'.
- FRACTIONAL CONTROLS:** Includes a checkbox for 'FDM', a dropdown for 'ORDER' set to '3rd Order Modulator', and a dropdown for 'DITHER' set to 'Strong Dithering'.
- INTERNAL LOOP FILTER:** Includes a checkbox for 'EN_LPFLTR', a dropdown for 'C3_4_ADJ' set to 'C3=100pF, C4=100pF', a dropdown for 'R3_ADJ' set to '20 Kohm', and a dropdown for 'R4_ADJ' set to '20 Kohm'.
- FASTLOCK CONTROLS:** Includes a dropdown for 'TOC' set to '0', a dropdown for 'ICPFL' set to '1X', a dropdown for 'R3_ADJ_FL' set to '0 Ohm', and a dropdown for 'R4_ADJ_FL' set to '0 Ohm'.
- LOCK DETECT:** Includes a dropdown for 'FoLD' set to 'Disabled'.
- Program Pins:** Includes checkboxes for 'CE' and 'TRIGGER'.

The status bar at the bottom indicates 'COMM Mode: LPT' and 'Selected device: LMX2531LQ2820E'.

The Bits/Pins tab displays many of the bits used to program the part. Right mouse click any bit to view more information about what this does.


PLL/VCO

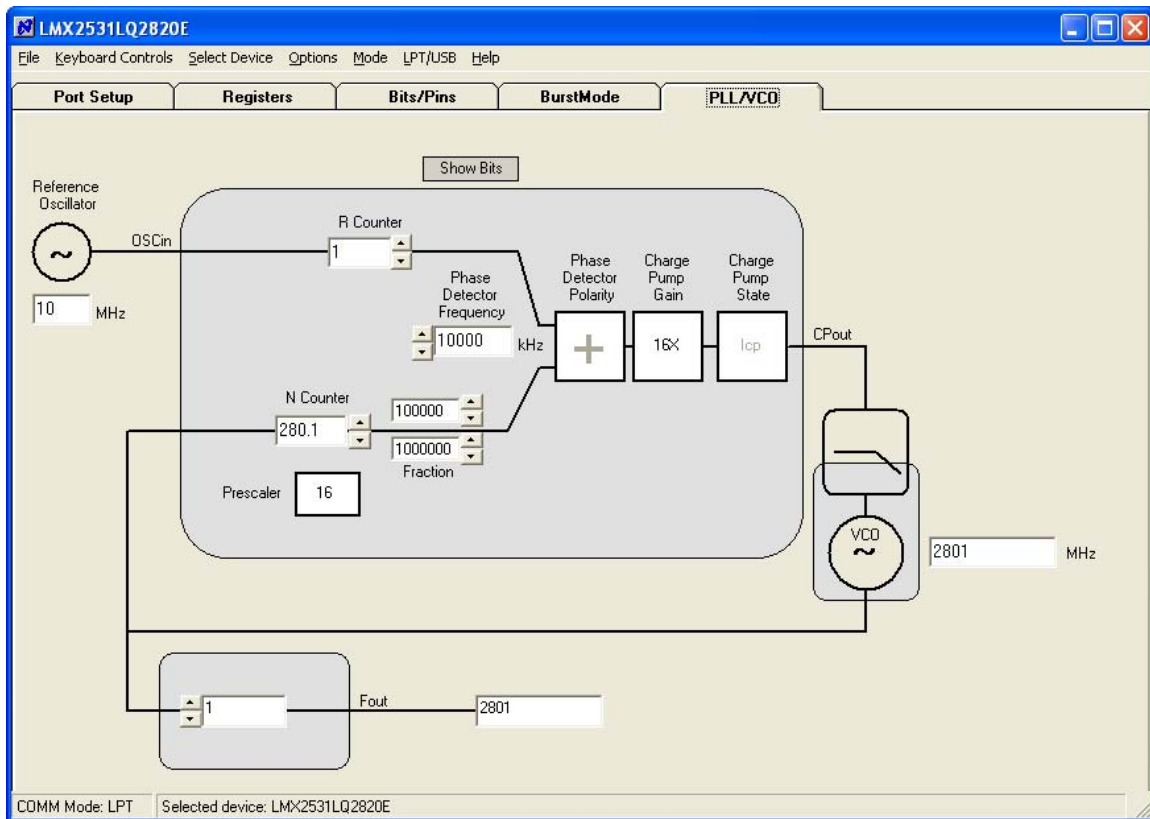

The PLL/VCO tab shows all the important PLL controls. Reference Oscillator should be programmed to the reference frequency connected to the OSCin of the evaluation board. R Counter, Phase Detector Frequency, N Counter, and Charge Pump Gain should be set to provide the desired output frequency with an optimized loop filter. The desired VCO frequency may also be entered directly into the VCO frequency box.


The LMX2531 also has an output divider which can be enabled by change divide value from 1 to 2 by Fout frequency box. Be sure to load the device (Ctrl+L) after changing this divider to allow the VCO to calibrate for optimal phase noise performance.

Registers

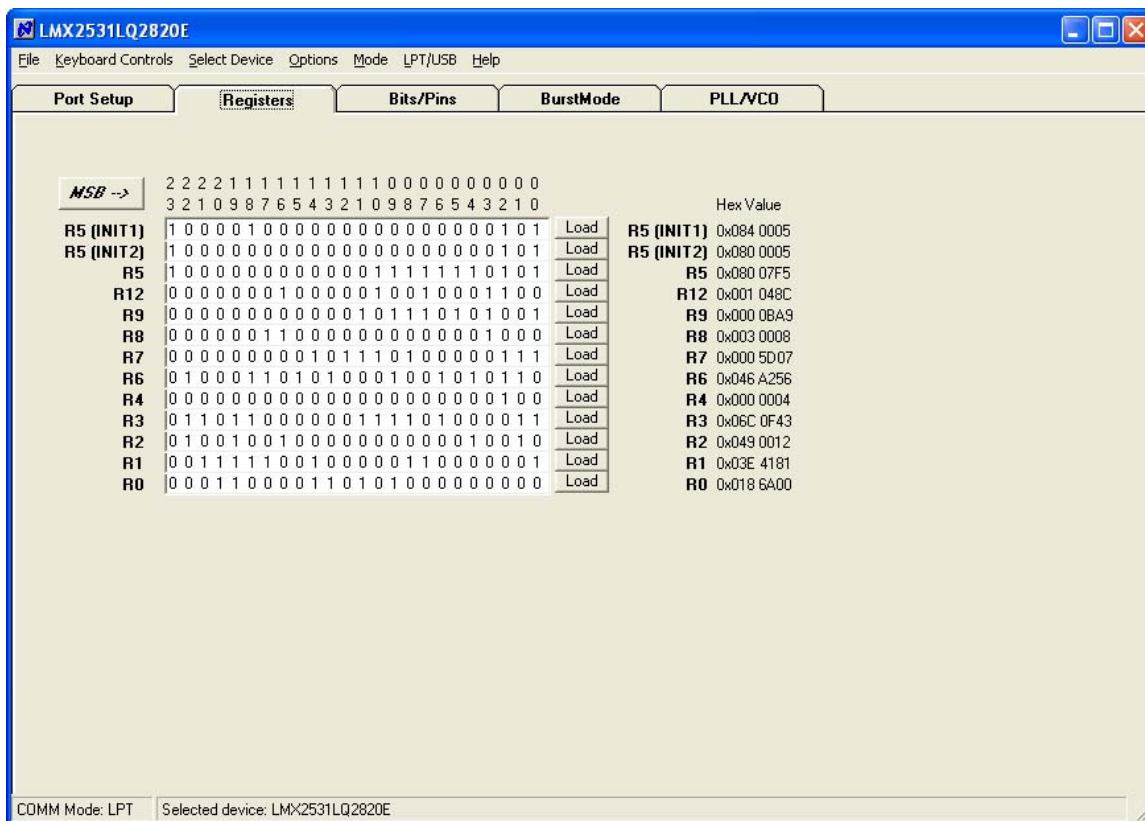


The Registers tab shows the literal bits that are being sent to the part. These are the registers every time the PLL is loaded by using the menu command or Ctrl+L. R5 (INIT1) and R5 (INIT 2) are just the R5 register being used to properly initialize the part. So a single Ctrl+L will load the part.

Port Setup

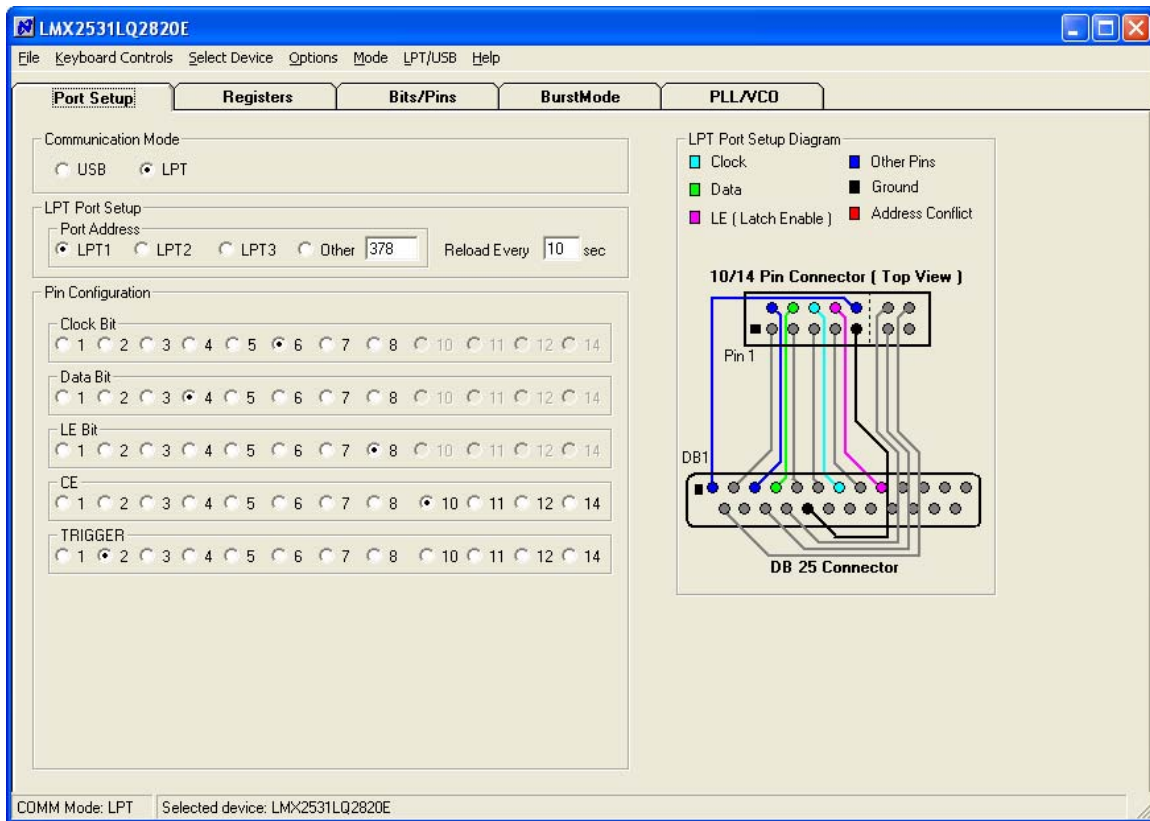

The port setup tells CodeLoader what information goes where. If this is wrong, the part will not program. Although LPT1 is usually correct, CodeLoader does NOT automatically detect the correct port. On some laptops, it may be LPT3.


Schematic

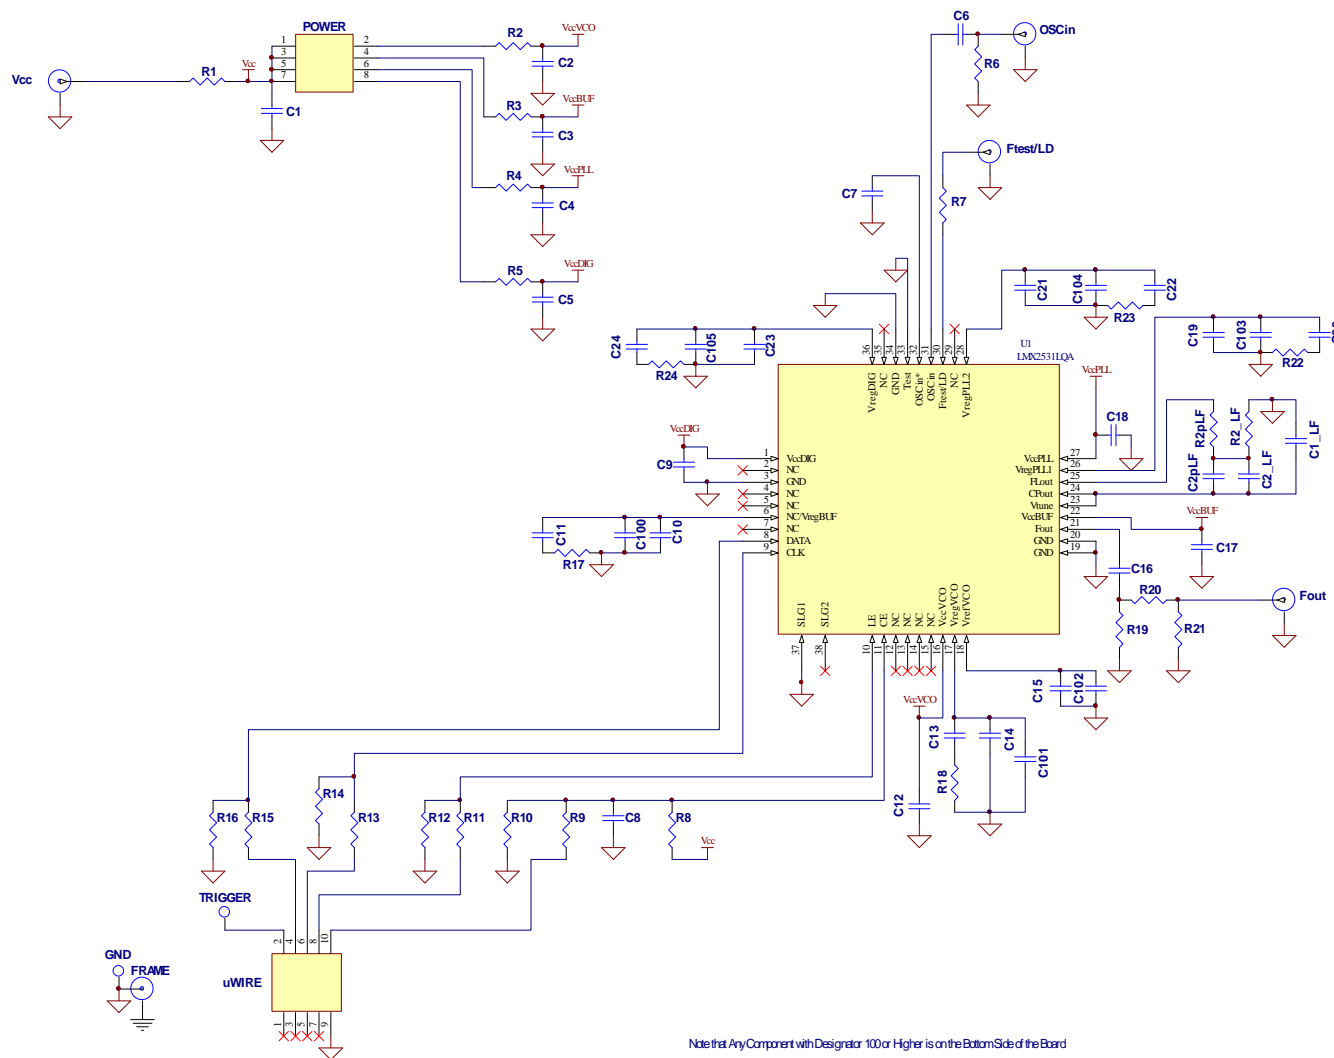


Bill of Materials

Bill of Materials				LMX2531_HF					Revision 3.28.2008
Item	QTY	Manufacturer	Part #	Size	Tol	Voltage	Material	Value	Designators
0	20	n/a						Open Capacitors	C1_LF, C2pLF, C2, C3, C4, C5, C9, C11, C14, C17, C18, C19, C21, C24, C100, C101, C102, C103, C104, C105
	7							Open Resistors	R2pLF, R7, R8, R17, R19, R21, R24
	1							Open Miscellaneous	Ftest/LD
1	1	Kemet	C0603C101J5GAC	603	5%	50V	C0G	100pF	C16
2	2	Kemet	C0603C103J5RAC	603	5%	50V	X7R	10nF	C10, C23
3	1	Kemet	C0805C104K5RACTU	805	5%	25V	C0G	100nF	C2_LF
4	6	Kemet	C0603C104J3RAC	603	5%	25V	X7R	100nF	C6, C7, C12, C15, C22, C20
5	1	Kemet	C0603C105K4RAC	603	10%	16V	X5R	1uF	C8
6	1	Kemet	C0603C475K9PAC	603	10%	6.3V	X5R	4.7uF	C13
7	1	Kemet	C0805C106K8PAC	805	10%	10V	X5R	10uF	C1
8	1	Vishay	CRCW0603000ZRT1	603	5%	0.1W	Thick Film	0Ω	R20
9	2	Panasonic	P.22AHCT-ND	603	10%	0.1W	Thick Film	0.22Ω	R22, R23
10	2	Vishay	CRCW06033R3JRT1	603	5%	0.1W	Thick Film	3.3Ω	R1, R18
11	4	Vishay	CRCW0603100JRT1	603	5%	0.1W	Thick Film	10Ω	R2, R3, R4, R5
12	1	Vishay	CRCW0603510JRT1	603	5%	0.1W	Thick Film	51Ω	R6
13	1	Vishay	CRCW0603102JRT1	603	5%	0.1W	Thick Film	1KΩ	R2_LF
14	4	Vishay	CRCW0603103JRT1	603	5%	0.1W	Thick Film	10KΩ	R9, R11, R13, R15
15	4	Vishay	CRCW0603123JRT1	603	5%	0.1W	Thick Film	12KΩ	R10, R12, R14, R16
16	1	Comm Con Connectors	HTSM3203-8G2	2X4	n/a	n/a	Metal/Plastic	Header	POWER
17	1	FCI Electronics	52601-S10-8	2X5	n/a	n/a	Metal/Plastic	Header	uWire
18	3	Johnson Components	142-0701-851	SMA	n/a	n/a	Metal	SMA	Fout, OSCin, Vcc
19	1	National Semiconductor	LMX2531LQEBPCB	n/a	n/a	n/a	FR4	PCB Board	n/a
							62 mil Thick	1st Layer 10 mils	
20	1	National Semiconductor	LMX2531	LLP36	n/a	2.7	Silicon	LMX2531	U1
21	4	Com Con Connectors	CCIJ255G	2-Pin	n/a	n/a	Metal/Plastic	Shunt	Place Across:
									POWER: 1-2, 3-4, 5-6, 7-8
22	4	SPC Technology	SPCS-8	0.156"	n/a	n/a	Nylon	Nylon Standoffs	Place in 4 Holes in Corners of Board

Top Layer

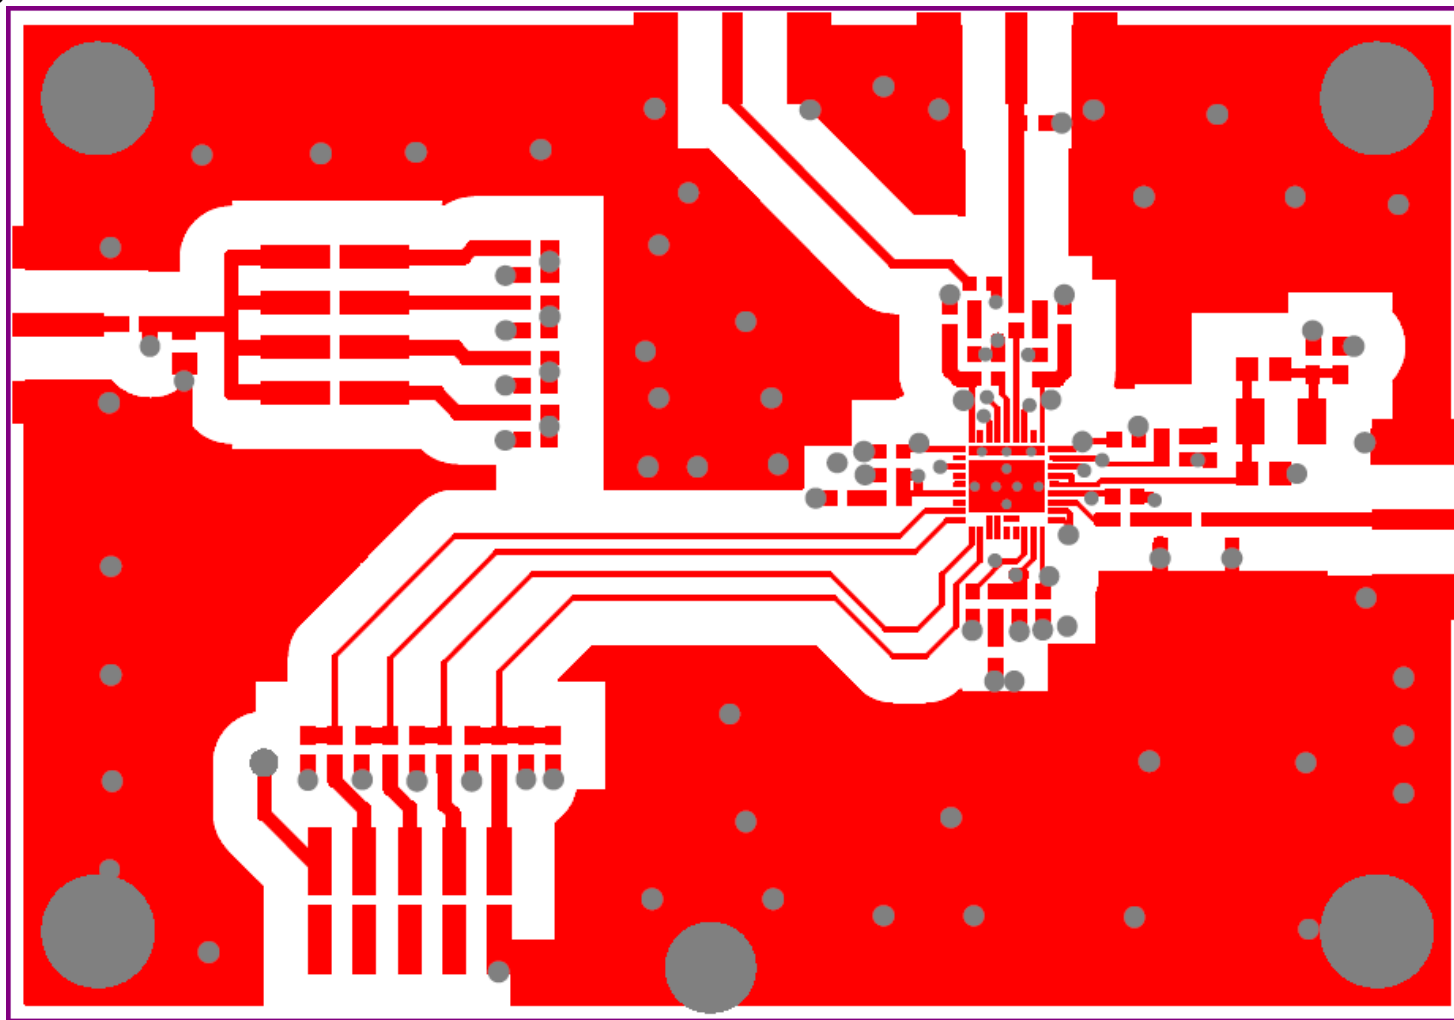


Mid Layer 1 "Ground Plane"

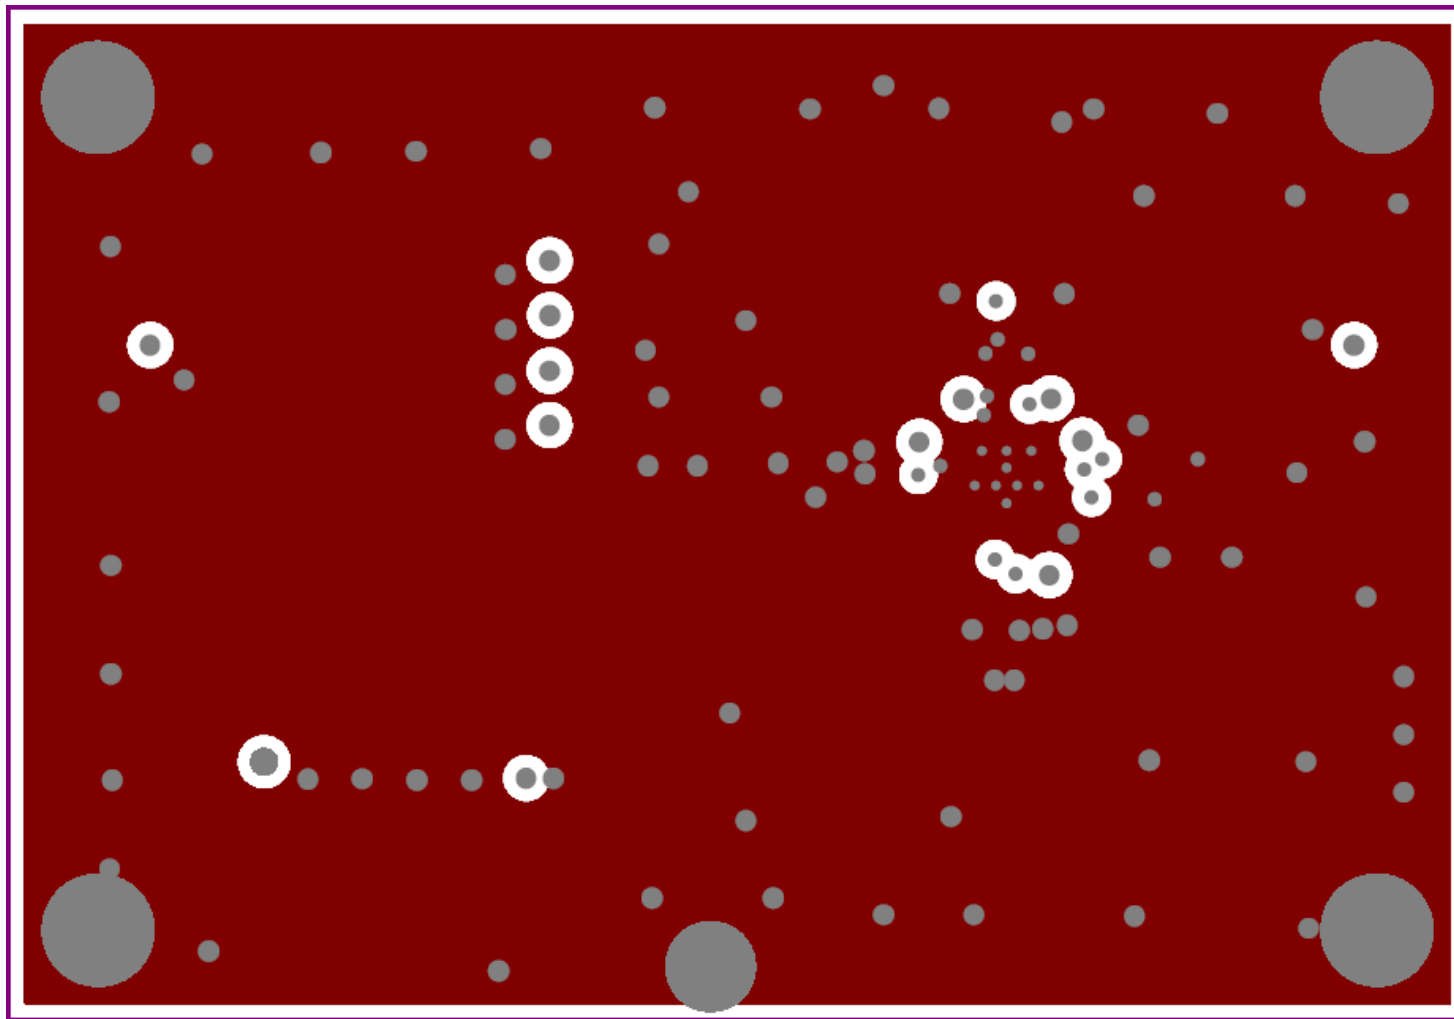


(15 mils below top FR4 layer)

Mid Layer 2 "Power"

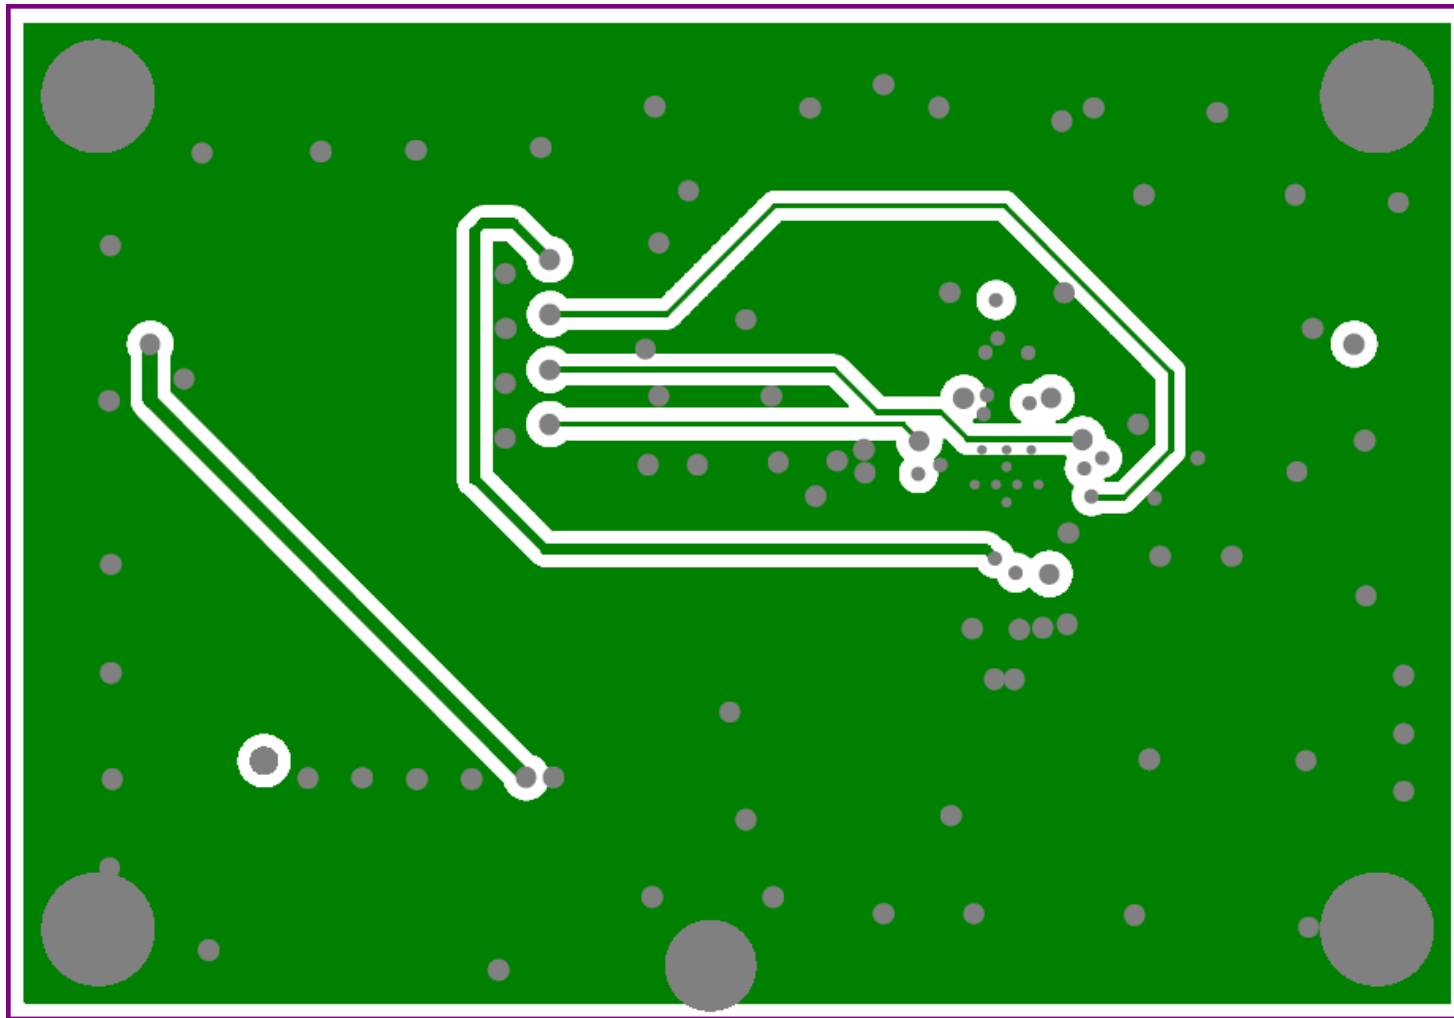


Bottom Layer "Signal"

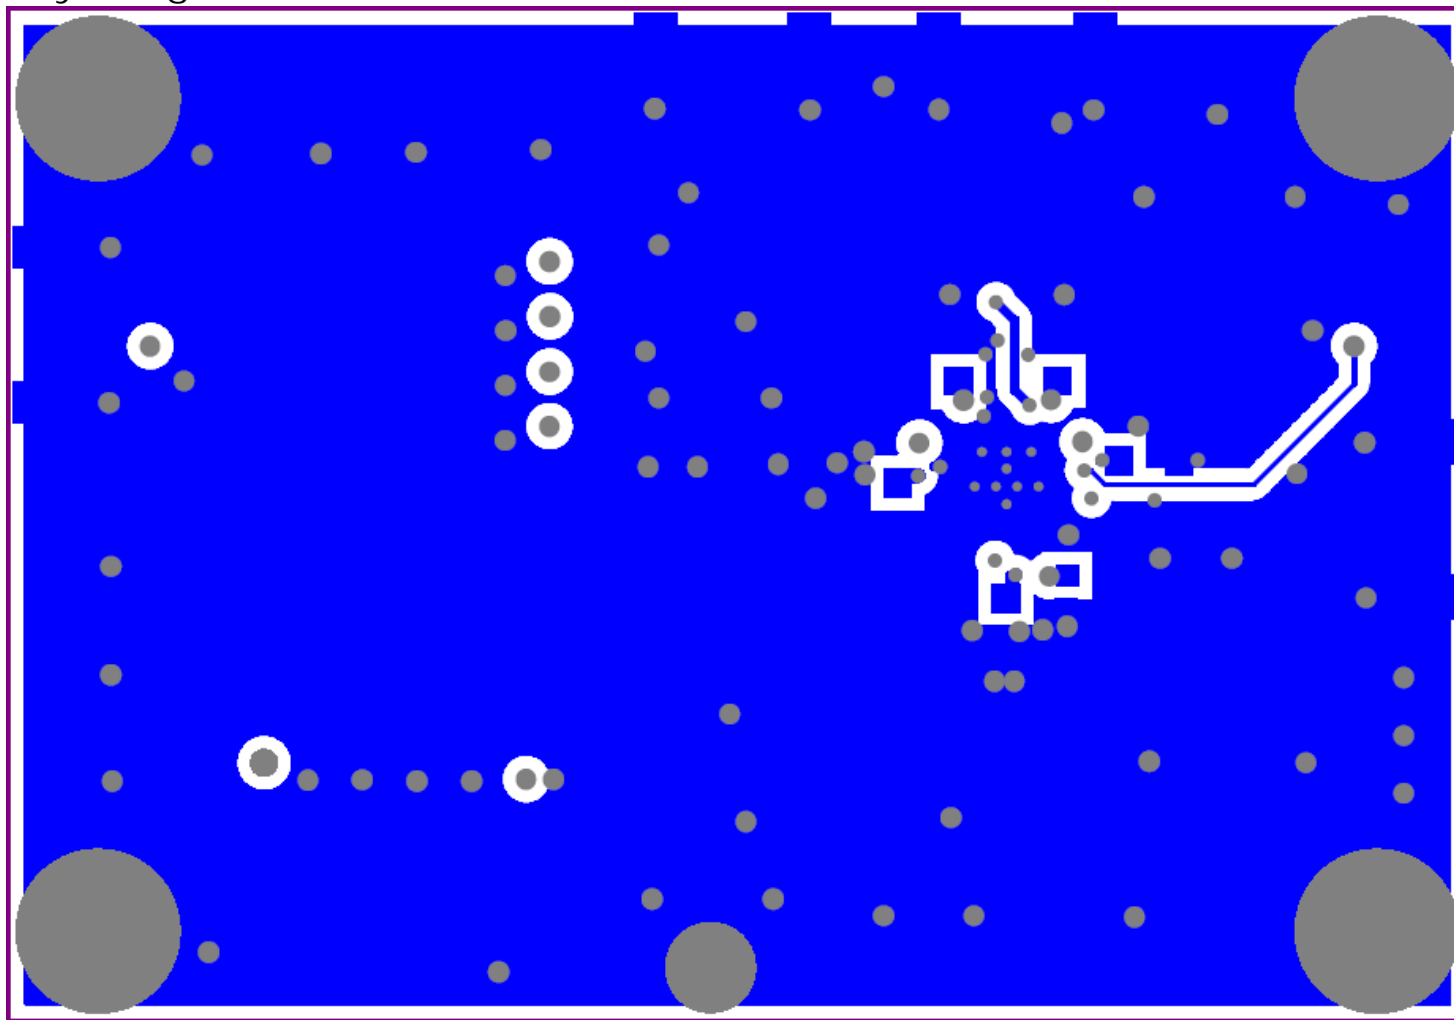

Note: Total Board Thickness = 61 mils

Top Build Diagram

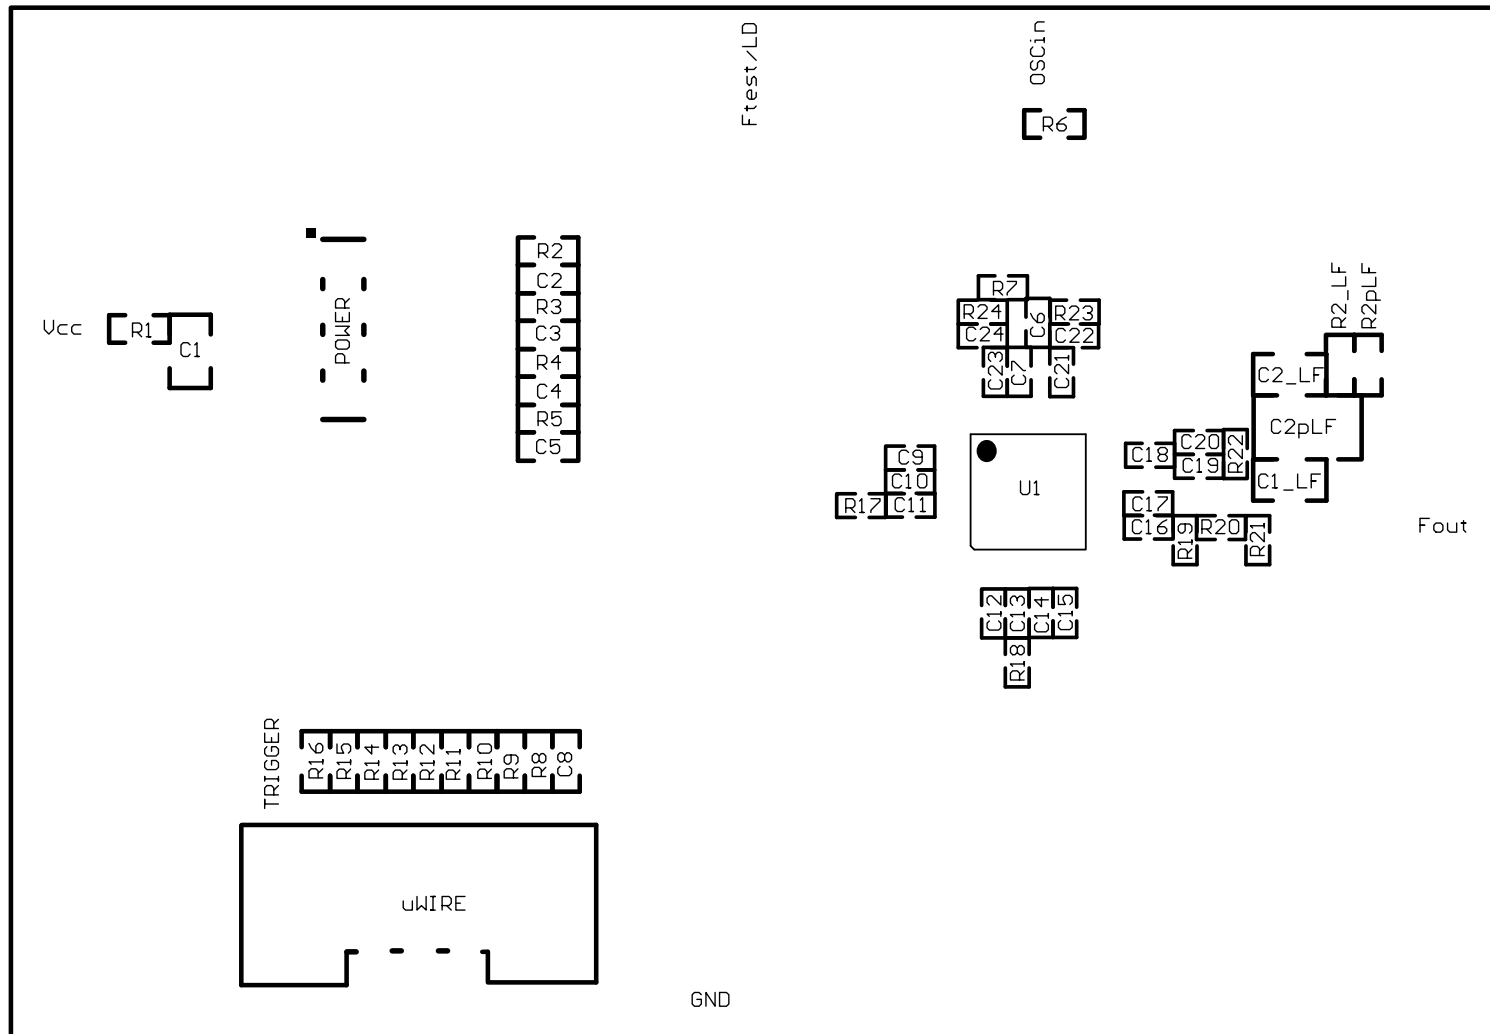

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Mobile Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community Home Page

e2e.ti.com

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2012, Texas Instruments Incorporated