

390-055

Submersible EMI/RFI Cable Sealing Backshell with Strain Relief

Type F - Self-Locking Rotatable Coupling - Standard Profile

CONNECTOR DESIGNATORS **A-F-H-L-S** **SELF-LOCKING** **ROTATABLE** **COUPLING**

TYPE F INDIVIDUAL AND/OR OVERALL SHIELD TERMINATION

Product Series **390** F H 055 M 16 10 M

Connector Designator **F**

Angle and Profile
H = 45°
J = 90°
See page 39-70 for straight


Strain Relief Style
(H, A, M, D)

Cable Entry (Tables X, XI)

Shell Size (Table I)


Finish (Table II)

Basic Part No.

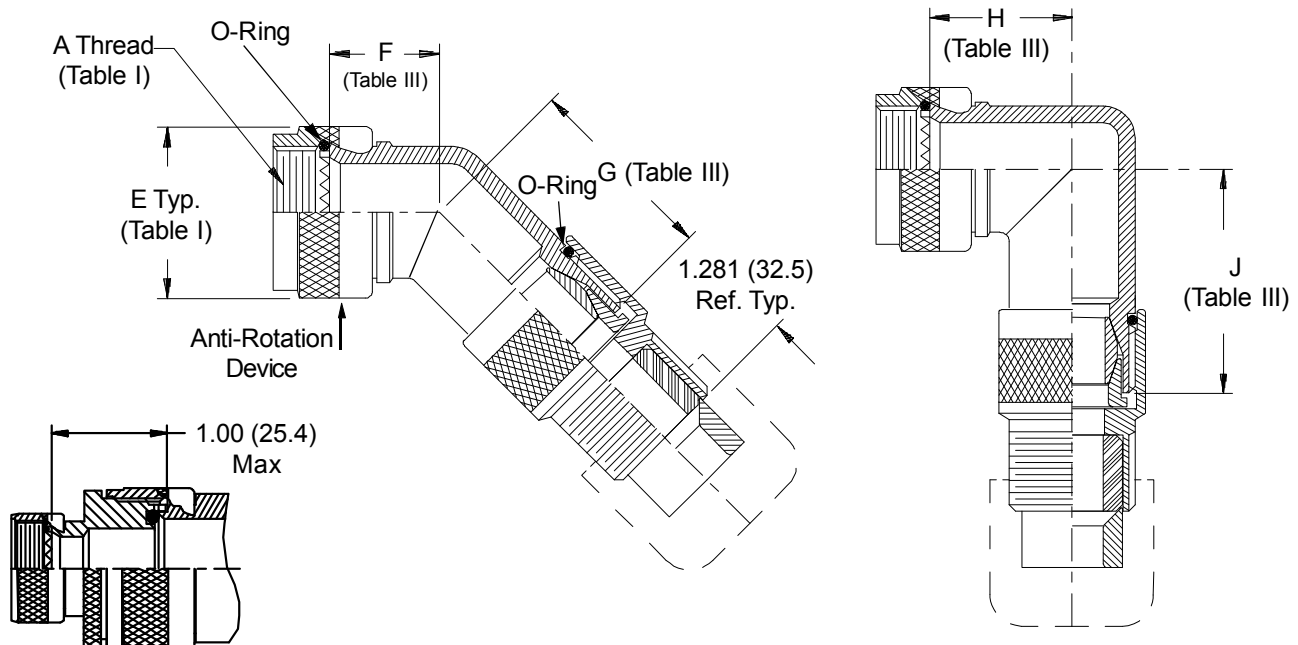


STYLE 2
(See Note 1)


STYLE H
Heavy Duty
(Table X)



STYLE A
Medium Duty
(Table XI)




STYLE M
Medium Duty
(Table XI)



STYLE D
Medium Duty
(Table XI)

.135 (3.4)
Max



390-055
Submersible EMI/RFI Cable Sealing Backshell
with Strain Relief
Type F - Self-Locking Rotatable Coupling - Standard Profile



See inside back cover fold-out or pages 13 and 14 for Tables I and II.

TABLE III: ELBOW DIMENSIONS

Shell Size Conn. Desig. A-F-L-S		F Max	G Max	H Max	J Max
08	09	.795 (20.2)	1.031 (26.2)	.906 (23.0)	1.157 (29.4)
10	11	.820 (20.8)	1.063 (27.0)	.966 (24.5)	1.217 (30.9)
12	13	.844 (21.4)	1.094 (27.8)	1.026 (26.1)	1.277 (32.4)
14	15	.861 (21.9)	1.119 (28.4)	1.076 (27.3)	1.347 (34.2)
16	17	.888 (22.6)	1.147 (29.1)	1.136 (28.9)	1.407 (35.7)
18	19	.904 (23.0)	1.157 (29.4)	1.176 (29.9)	1.427 (36.2)
20	21	.929 (23.6)	1.177 (29.9)	1.236 (31.4)	1.487 (37.8)
22	23	.956 (24.3)	1.217 (30.9)	1.296 (32.9)	1.567 (39.8)
24	25	.979 (24.9)	1.247 (31.7)	1.356 (34.4)	1.637 (41.6)

TABLE X: CABLE ENTRY

Dash No.	T Max	V Max	Cable Range	
			Min	Max
04	.780 (19.8)	.957 (24.3)	.125 (3.2)	.312 (7.9)
06	.780 (19.8)	1.145 (29.1)	.250 (6.4)	.437 (11.1)
08	.780 (19.8)	1.332 (33.8)	.387 (9.3)	.562 (14.3)
10	.780 (19.8)	1.332 (33.8)	.350 (8.9)	.625 (15.9)
12	.811 (20.6)	1.551 (39.4)	.500 (12.7)	.750 (19.1)
16	.905 (23.0)	1.770 (45.0)	.625 (15.9)	.937 (23.8)
20	1.092 (27.7)	2.113 (53.7)	.875 (22.2)	1.250 (31.8)
24	1.124 (28.5)	2.363 (60.0)	1.000 (25.4)	1.375 (34.9)
28	1.399 (35.5)	2.770 (70.4)	1.250 (31.8)	1.625 (41.3)
32	1.399 (35.5)	3.020 (76.7)	1.437 (36.5)	1.875 (47.6)

1. When maximum cable entry (page 21) is exceeded, Style 2 will be supplied. Dimensions F, G, H and J will not apply. Please consult factory.
2. Metric dimensions (mm) are indicated in parentheses.
3. Cable range is defined as the accommodations range for the wire bundle or cable. Dimensions shown are not intended for inspection criteria.
4. Interface O-Ring not supplied with connector designator A.

TABLE XI: CABLE ENTRY

Dash No.	W Max	X Max	Y Max	Z Max	Cable Range	
					Min	Max
03*	.437 (11.1)	.760 (19.3)	.843 (21.4)	.630 (16.0)	.156 (4.0)	.250 (6.4)
04*	.437 (11.1)	.760 (19.3)	.906 (23.0)	.755 (19.2)	.188 (4.8)	.312 (7.9)
06*	.500 (12.7)	.760 (19.3)	1.093 (27.8)	.942 (23.9)	.281 (7.1)	.438 (11.1)
08	.563 (14.3)	.760 (19.3)	1.187 (30.1)	1.067 (27.1)	.387 (9.3)	.562 (14.3)
10	.563 (14.3)	.760 (19.3)	1.281 (32.5)	1.192 (30.3)	.375 (9.5)	.625 (15.9)
12	.563 (14.3)	.760 (19.3)	1.500 (38.1)	1.380 (35.1)	.438 (11.1)	.750 (19.1)
16	.656 (16.7)	1.073 (27.3)	1.719 (43.7)	1.535 (39.0)	.625 (15.9)	.938 (23.8)
20	.656 (16.7)	1.323 (33.6)	2.062 (52.4)	1.848 (46.9)	.875 (22.2)	1.250 (31.8)
24	.656 (16.7)	1.323 (33.6)	2.312 (58.7)	2.255 (57.3)	1.000 (25.4)	1.375 (34.9)
28	1.188 (30.2)	1.572 (39.9)	2.719 (69.1)	2.505 (63.6)	1.250 (31.8)	1.625 (41.3)
32*	1.187 (30.1)	1.572 (39.9)	2.969 (75.4)	2.755 (70.0)	1.437 (36.5)	1.875 (47.6)
40*	1.125 (28.6)	1.572 (39.9)	3.531 (89.7)	3.255 (82.7)	1.875 (47.6)	2.375 (60.3)

* Not available in Style M clamp.