


# ezPyro™ I<sup>2</sup>C Pyroelectric Infrared Broadband Sensors (SMD)

## Introduction

The ezPyro range of thin film digital pyroelectric IR sensors combines high quality sensors with a high level of configurable electronic integration in a small SMD package. High sensitivity combined with fast response times ensure rapid and accurate detection of target gases. These sensors integrate a digital, current mode read-out that enables lower IR-emitter duty cycles, thereby saving significantly on system level power consumption, while maintaining high SNR. Programmable gain and filtering offer maximum flexibility in system design. Industry standard I<sup>2</sup>C communication enables plug-and-play connectivity to microcontrollers and allows easy tuning and calibration. ezPyro sensors are very stable over time ensuring a long and maintenance-free operational lifespan. Various optical filter options are available.

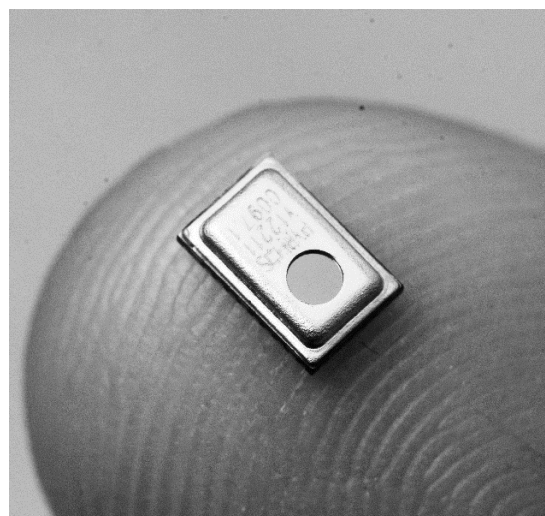

To make it easier for customers to use their own optical bandpass filters Pyreos provides sensors with either a 2.5-6  $\mu\text{m}$  or 6-14  $\mu\text{m}$  broadband filter. Optical bandpass filters can be applied in front of these broadband filters.

### Sensor Characteristics

Filter aperture	$d = 1.65 \text{ mm}$
Element size	$0.64 \times 0.64 \text{ mm}^2$
SMD Package	$5.65 \times 3.7 \times 1.55 \text{ mm}$
$D^*$ (typ.) <sup>1</sup>	$2.5 \times 10^8 \text{ cm}\sqrt{\text{Hz}}/\text{W}$
NEP (typ.) <sup>1</sup>	$2.7 \times 10^{-10} \text{ W}/\sqrt{\text{Hz}}$
Time Constant	$\sim 10\text{ms}$ (10-20 Hz peak)
Field of View	$\sim 90^\circ$

### Electrical Characteristics

Supply voltage	1.75 to 3.6 V
Supply current (typ.)	1 to 23 $\mu\text{A}$
Digital I/O	I <sup>2</sup> C (FM+ compatible)
ADC	15bit $\Delta\Sigma$ ADC @1ksp
Operating Temperature	-40 to +85 $^\circ\text{C}$
Storage Temperature	-40 to +110 $^\circ\text{C}$
Sensor read-out	Current mode
	Gain / digital filtering /
Configurable	sampling rate / power modes

1) Measured without filter @ 500K, 10 Hz, room temperature

## Order Information


Part Number	Filter	Filter Bandwidth
ePY12121	2.2 $\mu\text{m}$ Long Pass	2.5 - 6 $\mu\text{m}$
ePY12111	5.0 $\mu\text{m}$ Long Pass	5 - 14 $\mu\text{m}$

Ordering Code	Description
ePYxxxx-R7	800 pcs on 7" tape and reel
ePYxxxx-R13	4000 pcs on 13" tape and reel
ePYxxxx	bulk
ePYxxxx-B1	Sensor on a breakout PCB

For more information contact: [sales@pyreos.com](mailto:sales@pyreos.com)

Please note: the information contained in this document is subject to change without further notification. Pyreos reserves the right to alter the performance and any resulting specification. Pyreos may choose not to supply any engineering sample devices as a commercial product. No responsibility is accepted for any consequential loss incurred. Pyreos Ltd, SMC, Alexander Crum Brown Road, Edinburgh EH9 3FF, UK. Tel: +441316507009, [www.pyreos.com](http://www.pyreos.com)

**Package Information**

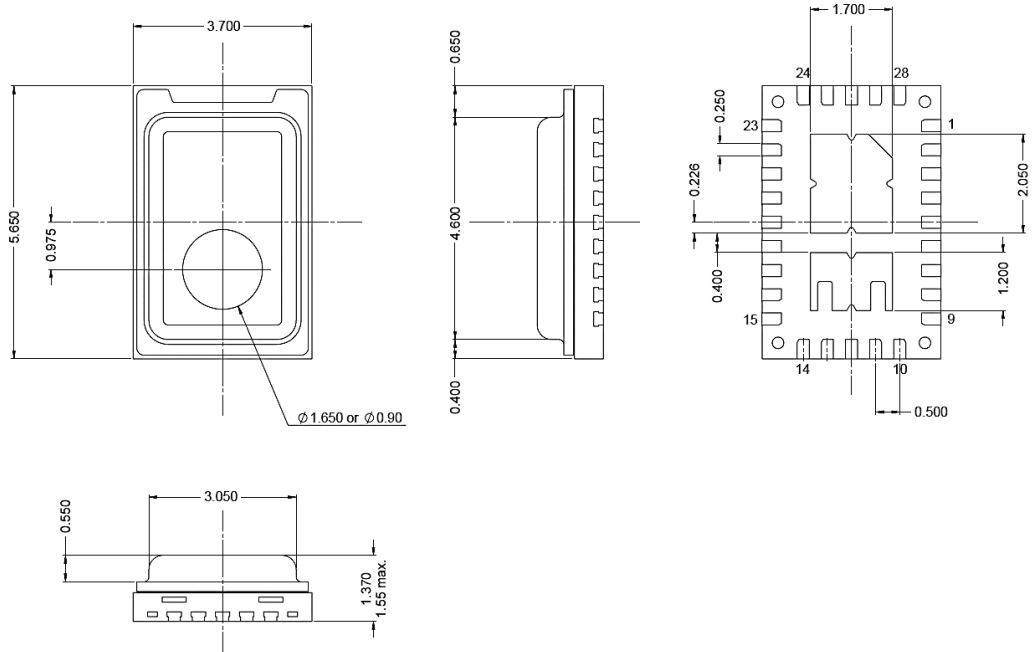


**Signal Filtering & Power Modes**

Power Mode (base sample rate)	High Pass Filter – Analog (Hz)					Fixed Analog Low Pass Filter (Hz)	Fixed Digital Low Pass Filter (Hz)	Digital Low Pass Filter (Hz)				Max ADC Sampling Rate (sps)
Normal Power Mode	Off	1	2	4	8	600	250	180	90	45	22.5	1000
Low Power Mode	Off	0.17	0.33	0.66	1.3	100	42	30	15	7.5	3.75	166


	Mode	Description	Typical Current Consumption (1.8 V, room temperature)
Power consumption	Normal Power Mode	Normal power consumption, 1 kHz max. sample rate	22 $\mu$ A
	Low Power Mode	Low power consumption, 166 Hz max. sample rate	3.5 $\mu$ A
Operational state	Normal Operation Mode	Sensor signal readout over I <sup>2</sup> C	22 $\mu$ A
	Sleep Mode	Hardware interrupt on infrared trigger	21 $\mu$ A (Normal), 3.5 $\mu$ A (Low)
	Power Down Mode	Sensor is disabled	1.1 $\mu$ A

**Circuit Diagrams**




Single Device Block Diagram

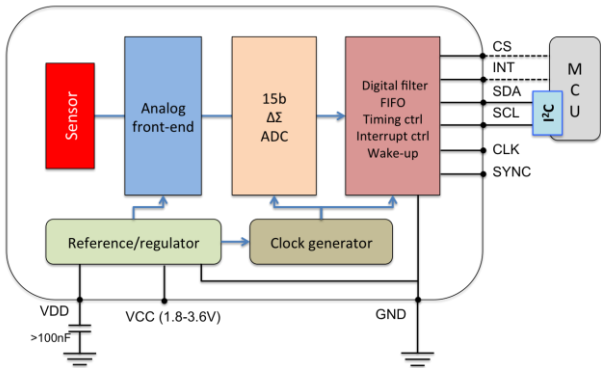

Three Devices with Synchronised Sampling

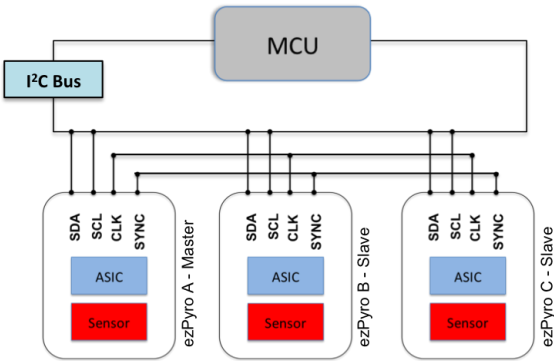


Please note: the information contained in this document is subject to change without further notification. Pyreos reserves the right to alter the performance and any resulting specification. Pyreos may choose not to supply any engineering sample devices as a commercial product. No responsibility is accepted for any consequential loss incurred. Pyreos Ltd, SMC, Alexander Crum Brown Road, Edinburgh EH9 3FF, UK. Tel: +441316507009, [www.pyreos.com](http://www.pyreos.com)

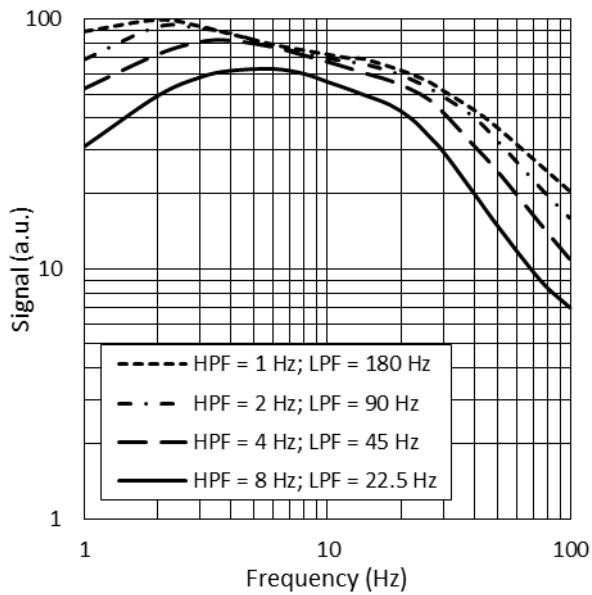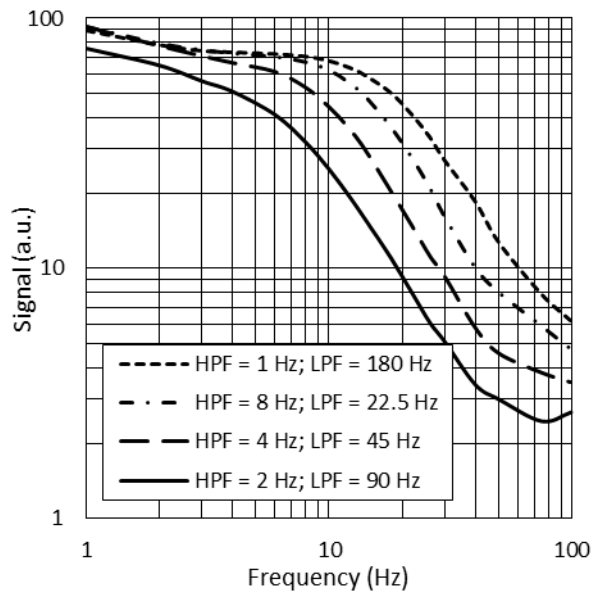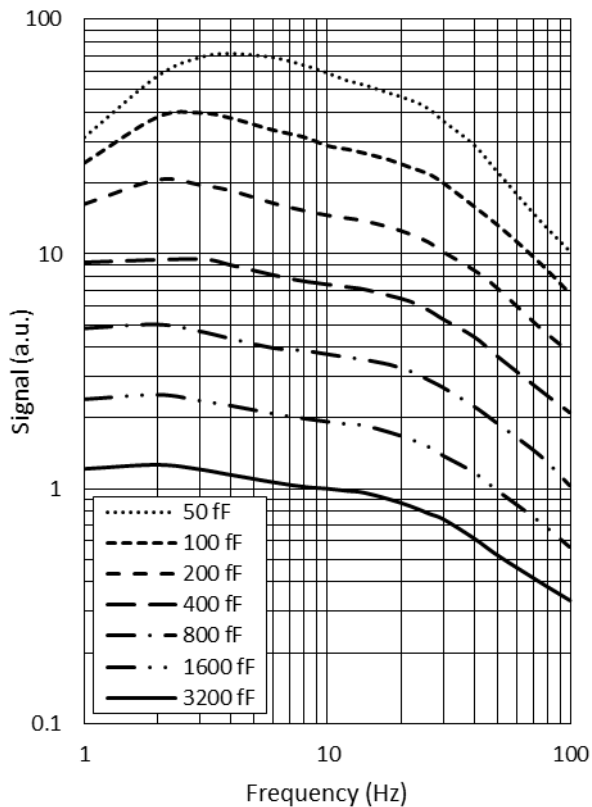**Infrared Frequency Characteristics****Typical Frequency Response in Normal Power Mode****Typical Frequency Response in Low Power Mode****Typical Frequency Response at Different Gain Settings**


Please note: the information contained in this document is subject to change without further notification. Pyreos reserves the right to alter the performance and any resulting specification. Pyreos may choose not to supply any engineering sample devices as a commercial product. No responsibility is accepted for any consequential loss incurred. Pyreos Ltd, SMC, Alexander Crum Brown Road, Edinburgh EH9 3FF, UK. Tel: +441316507009, [www.pyreos.com](http://www.pyreos.com)

**Filter Transmission Profiles**

Typical 2.2  $\mu\text{m}$  LP Filter Transmission

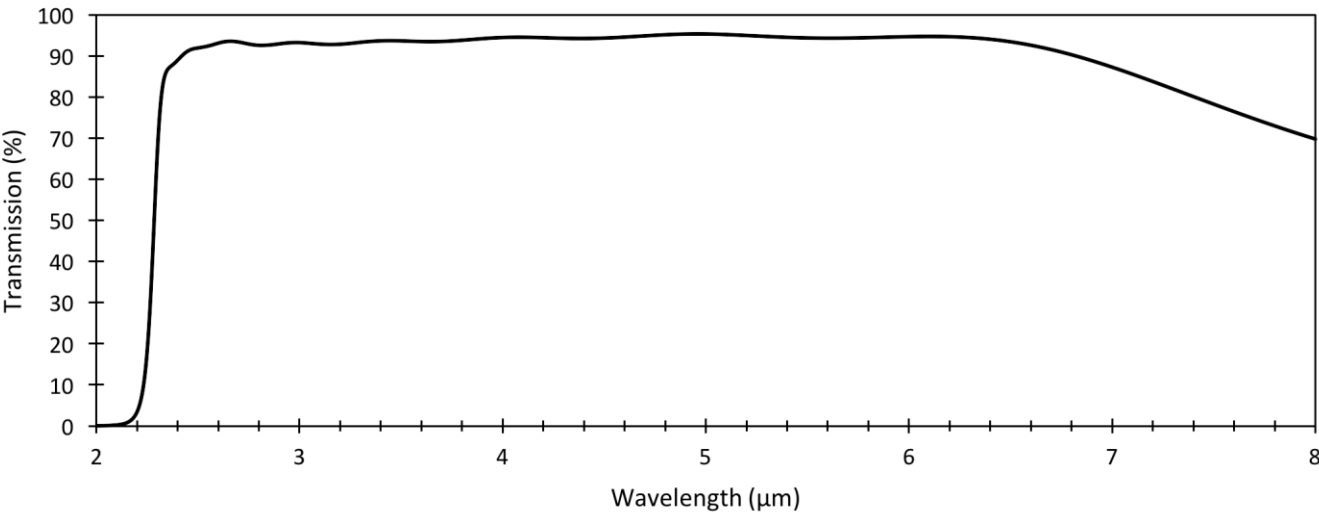

Typical 5.0  $\mu\text{m}$  LP Filter Transmission

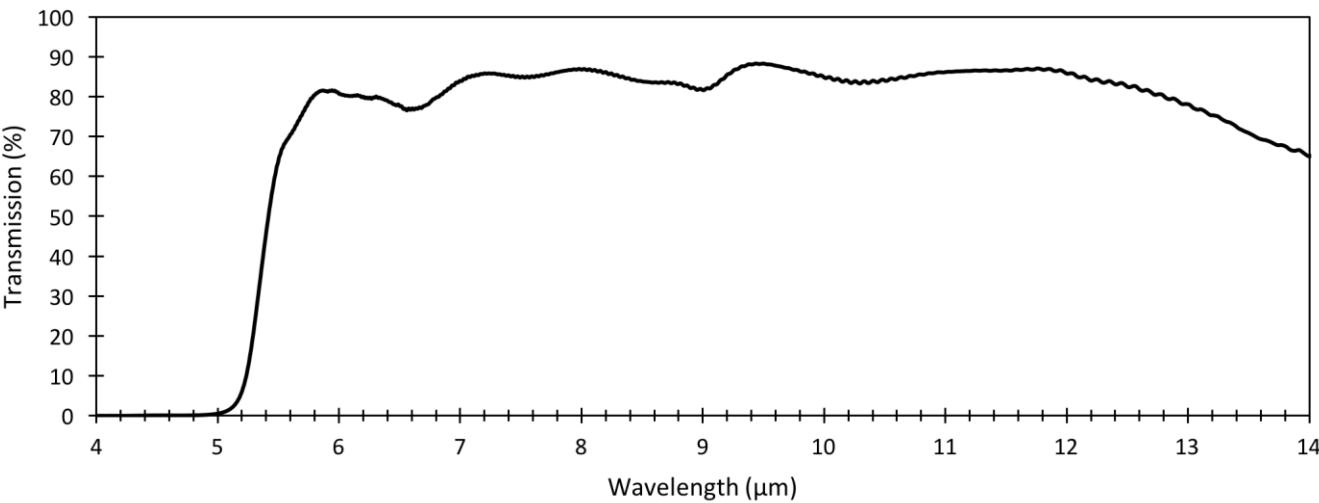

Please note: the information contained in this document is subject to change without further notification. Pyreos reserves the right to alter the performance and any resulting specification. Pyreos may choose not to supply any engineering sample devices as a commercial product. No responsibility is accepted for any consequential loss incurred. Pyreos Ltd, SMC, Alexander Crum Brown Road, Edinburgh EH9 3FF, UK. Tel: +441316507009, [www.pyreos.com](http://www.pyreos.com)