


# Fiber Sensor Best Selection Catalog

## Start with Smart!

Easily select the most reliable Fiber Unit  
for your detection conditions.

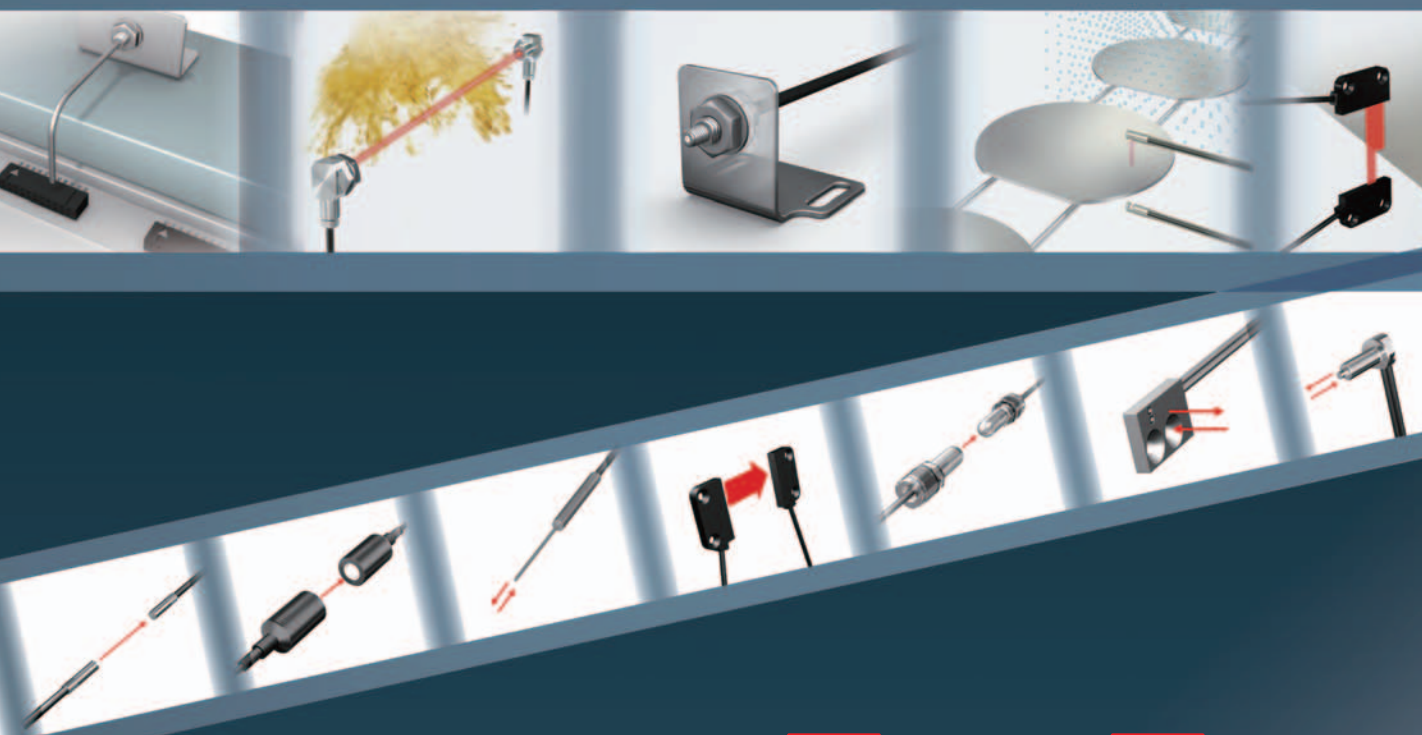


### New Product Information

**NEW**

Build-in **Lens** series

**Hex-shaped Fiber Units**

→ 96 Page



**NEW**

Smart Fiber Amplifier Units

**E3NX-FA**



**NEW**

Sensor Communications Units

**E3NW**



EtherCAT

CompoNet


CC-Link V2

# Easy

## “Mounts Anywhere”


### Wide Variety

Variouly-shaped, compact heads allow installation in any small space.

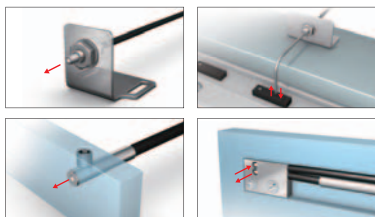

### Suitable for Harsh Environments

Fiber Units are available for various installation conditions and can be installed as is, even in harsh environments.

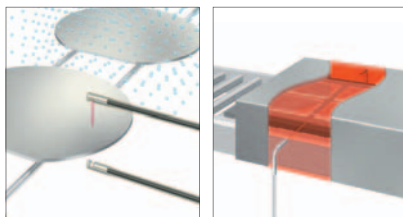

## “Achieve Easy Detection in Many Applications”

### Smart Tuning

Just press the button to set the optimum incident level and threshold. Consistent settings are achieved for all users with this ultra-easy procedure.



### Automatic Setting of Optimum Values


Threshold + Incident Level

5000 9999

Set to the intermediate value between the incident levels with and without a workpiece. Incident level adjustment with and without a workpiece.

### Optimum Light Intensity Adjustment from Transparent Objects to Black Workpieces

The incident level is optimized to enable stable detection even for saturated or insufficient incident levels.

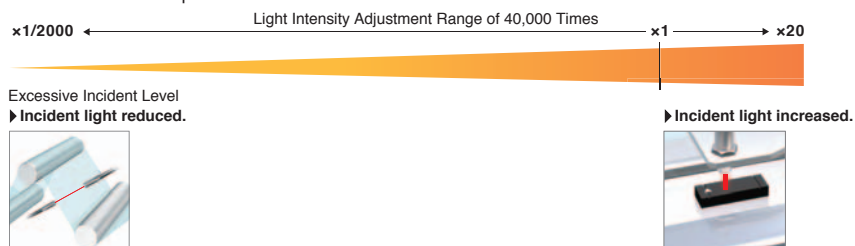

## “Smooth Wiring and Setting”

### Reduced Wiring

Simply link the Fiber Amplifier Units together for easy wiring and checking.

### Separate Installation

Use the Distributed Sensor Unit for distributed installation to reduce introduction costs and work.

### Easy Setup

Commissioning time is reduced with batch setting from a Touch Panel or backup data for process switchovers.



# Fiber

‘Easy’ and ‘Stable’ for

NEW

Smart Fiber Amplifier Units  
**E3NX-FA**

62, 64  
Page

installation when starting production.  
Fiber Amplifier Units with easy optimum setting

Stable

## Fiber Units E32

06  
Page



### “Expanded Application Response Capabilities”

#### Improved Basic Performance

Improvements in the sensing distance and minimum sensing object increase the range of application for stable detection.

**1.5 Times**  
the Sensing Distance\*

**6 m**

For E32-LT11 Fiber Unit with a  
fiber length of 3.5 m

**1/10th**  
the Minimum Sensing Object\*

**0.3  $\mu\text{m}$  dia.**

Typical example of actual measurements  
with E32-D11R Fiber Unit.

\*Compared to E3X-HD.

NEW

## Sensor Communications Units E3NW

EtherCAT

CompoNet

CC-Link V2


62, 64  
Page

# Sensor

Minimal Cost Process.

### Basic Features of Fiber Sensors

**Ideal for narrow spaces  
or for detecting minute  
objects.**

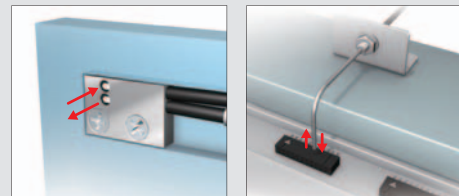

**Digital display achieves visual  
control and quantitative control.**

#### Conventional Photoelectric Sensor with Built-in Amplifier

Set the threshold by a sensitivity  
adjuster / Check the operation by  
an indicator.



- Ambiguous standard  
(e.g., 3/4 turn of adjuster)
- Indicator does not show the present value.

#### Fiber Sensor

Quantitative control over threshold settings  
with a digital display.



- The reference value can be set numerically for  
easier specification.
- Easily perceivable present value.

Selection by **Category****STEP 1**

## Select a Fiber Unit.

Select a category.

Fiber Unit Index

05  
Page

Select a model.

Category Pages

06 to 61  
Page**STEP 2**Select a Fiber  
Amplifier Unit and  
Communications  
Unit.62  
Page**STEP 3**Select Accessories  
of Fiber Amplifier  
Unit65,79  
Page**Before Selecting Fiber Units**

The Fiber Units specifications give the sensing distance when the Fiber Unit and Fiber Amplifier Unit is combined. Check the Fiber Amplifier Unit series for easier selection.

## &lt;Specifications on Each Fiber Unit Category Page&gt;

Appearance (mm)	Bending radius of cable	Sensing distance (mm)	Optical axis diameter (minimum sensing object)	Models	Dim
		E3X-HD	E3NX-FA		
		GIGA HS	GIGA HS		
		Other modes	Other modes		
		2,000	3,000		
		ST : 1,000	ST : 1,500		
		700	1,050		
		SHS : 280	SHS : 280		
				E32-T11R 2M	

**Fiber Amplifier Unit Series**

			E3X-HD Series	E3NX-FA Series <b>NEW</b>
Fiber Amplifier Unit specifications	Output		1 output	1 or 2 outputs (depending on the model)
	External input		Not supported	Supported or not supported (depending on the model)
	Response time		50 $\mu$ s (55 $\mu$ s)/250 $\mu$ s/1 ms/16 ms (Default: 250 $\mu$ s)	30 $\mu$ s (32 $\mu$ s)/250 $\mu$ s/1 ms/16 ms (Default: 250 $\mu$ s)
	Sensing distance (Giga-power mode)	E32-T11R	2,000 mm	3,000 mm
		E32-D11R	840 mm	1,260 mm
Sensor Communications Unit application	Minimum sensing object	E32-T11R	5 $\mu$ m dia.	2 $\mu$ m dia.
	Communications method (Sensor Communications Unit model)		EtherCAT (E3X-ECT) CompoNet (E3X-CRT)	EtherCAT (E3NW-ECT) CompoNet (E3NW-CRT) CC-Link (E3NW-CCL)
	Applicable Sensors		Fiber Sensor (E3X-HD0) Fiber Sensor (E3X-DA0-S, E3X-MDA0) Laser Photoelectric Sensor (E3C-LDA0) Proximity Sensor (E2C-EDA0)	Fiber Sensor (E3NX-FA0) Laser Sensors (E3NC-LA0, E3NC-SA0) Contact-Type Sensor (E9NC-TA0)*
Page listings	Ordering Information		78 Page	64 Page
	Ratings and Specifications		80 Page	66 Page
	Dimensions		80 Page	68 Page

\* E3NW-CRT Sensor Communications Units (CompoNet) cannot be used.

Selection by **Model****STEP 1**


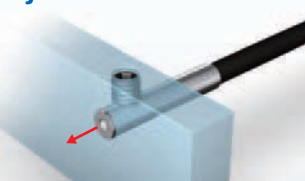
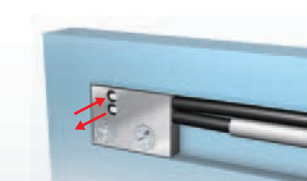
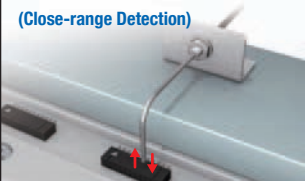

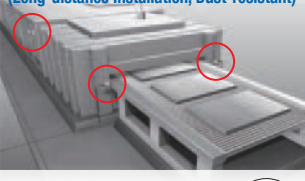
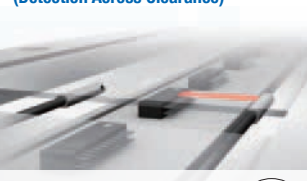

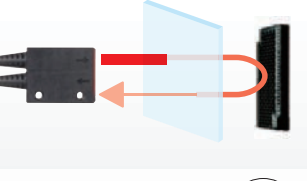








Search for the page  
in the model index.

98  
Page**STEP 2**


Search for the model  
on the corresponding  
pages.

Each  
Page


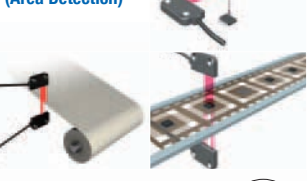
## Fiber Unit Index

Standard Installation		Saving Space	
<b>Threaded Models</b>  Standard screw-type installation. The Fiber Units is mounted into a drilled hole and secured with nuts. <b>06</b> Page	<b>Cylindrical Models</b>  Ideal for installation in narrow spaces. The Fiber Unit is secured with a set screw. <b>10</b> Page	<b>Flat Models</b>  Mount directly in limited spaces without using special mounting brackets. <b>14</b> Page	<b>Sleeve Models</b> (Close-range Detection)  Suitable for close-range detection. Ideal for detecting minute objects in areas with limited space. <b>16</b> Page
Beam Improvements			
<b>Small-Spot, Reflective</b> (Minute Object Detection)  Small-spot to accurately detect small objects. <b>20</b> Page	<b>High-power Beam</b> (Long-distance Installation, Dust-resistant)  Suitable for detection on large equipment, of large objects, and in environments with airborne particles. <b>24</b> Page	<b>Narrow View</b> (Detection Across Clearance)  The Fiber Unit emit a non-spreading beam to prevent false detection of light reflected off surrounding objects. <b>30</b> Page	<b>Detection without Background Interference</b>  Detect only objects in the sensing range, and not in the background. <b>32</b> Page
Transparent Object Detection			
<b>Retro-reflective</b>  Detect transparent objects reliably because the beam passes through the object twice, resulting in greater light interruption. <b>34</b> Page	<b>Limited-reflective</b> (Glass Detection)  The limited-reflective optical system provides stable detection of specular reflective glass. <b>36</b> Page		
Environmental Immunity			
<b>Chemical-resistant, Oil-resistant</b>  Made from materials that are resistant to various oils and chemicals. <b>38</b> Page	<b>Bending-resistant, Disconnection-resistant</b>  Resistant to repeated bending on moving parts and breaking from snagging or shock. <b>40</b> Page	<b>Heat-resistant</b>  Can be used in high-temperature environments at up to 400°C. <b>44</b> Page	
Special Applications			
<b>Area Beam</b> (Area Detection)  Detect across areas for meandering materials or falling workpieces whose position vary. <b>48</b> Page	<b>Liquid-level Detection</b>  Detect only liquid when being mounted on tubes or in liquid. <b>50</b> Page	<b>Vacuum-resistant</b>  Can be used under high vacuums of up to 10 <sup>-3</sup> Pa. <b>52</b> Page	<b>FPD, Semiconductors, and Solar Cells</b>  Designed specifically to reliably detect glass substrates and wafers. <b>54</b> Page

Threaded	Standard Installation
Cylindrical	
Flat	
Sleeved	Saving Space
Small Spot	
High Power	
Narrow view	Beam Improvements
BGS	
Retro-reflective	
Limited-reflective	Transparent Objects
Chemical-resistant, Oil-resistant	
Bending	
Heat-resistant	Environmental Immunity
Area Detection	
Liquid-level	
Vacuum	Applications
FPD, Semi, Solar	
Installation Information	

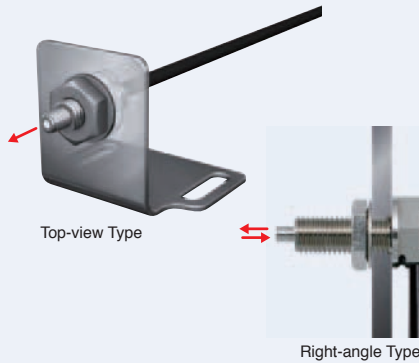

- Standard configuration. These Fiber Units are mounted into a hole drilled in a bracket and secured with nuts.
- The Right-angle Model prevents snagging on the cable because the cable runs along the mounting surface.

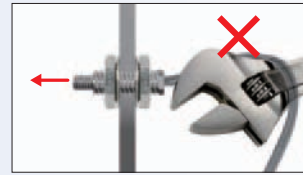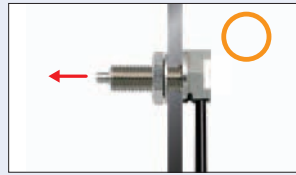


















Hex-shaped Fiber Units with Build-in Lenses [Build-in Lens](#) have been added to the series. (They have a right-angle shape like that of the E32-T11N shown below.)

→ [96 Page](#)

## Specifications

### Through-beam Fiber Units

Sensing direction (Aperture angle)	Size	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	07 Page Dimensions No.
				E3X-HD		E3NX-FA <b>NEW</b>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Right-angle (Approx. 60°)	M4		Flexible, R1	 2,000	ST : 1,000	 3,000	ST : 1,500	1 dia. (5 μm dia./ 2 μm dia.)	E32-T11N 2M	
Top-view (Approx. 60°)				 700	SHS: 280	 1,050	SHS: 280		E32-T11R 2M	
Top-view (Approx. 15°)			R25	 4,000*	ST : 4,000*	 4,000*	ST : 4,000*	2.3 dia. (0.1 dia./ 0.03 dia.)	E32-LT11 2M <b>NEW</b>	
		Flexible, R1	 4,000*	ST : 3,500	 4,000*	ST : 4,000*	E32-LT11R 2M <b>NEW</b>			
				 2,300	SHS: 920	 3,450	SHS: 920			

\* The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)  
[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)


**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.

## Dimensions


Installation Information → 59, 60 Page

### Through-beam Fiber Units (Set of 2)

#### 07-A E32-T11N 2M (Free Cutting)

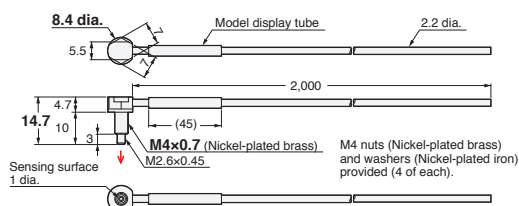


#### 07-B E32-T11R 2M (Free Cutting)

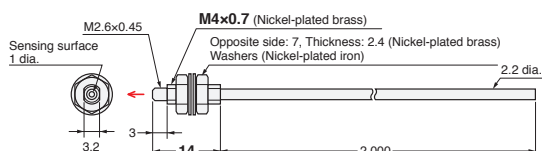

#### 07-C E32-LT11 2M (Free Cutting)

#### E32-LT11R 2M (Free Cutting)

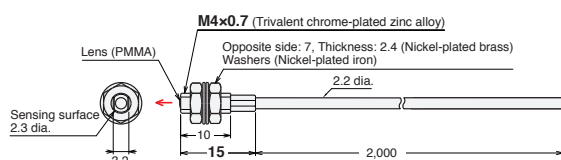



## - Reference Information for Model Selection -

### Features of the Right-angle Type

- Cable is less prone to snagging.
- Cable runs along the mounting surface for less space compared with Top-view Fiber Units.
- The nut is attached to the Fiber Unit to reduce installation work.

### What Is "Flexible" Fiber?

The flexible fiber has a small bending radius for easy routing without easily breaking. It is easy to use because the cable can be bent without significantly reducing light intensity.



Structure which has a cladding around a large number of ultrafine cores.

And

### Long-distance Sensing Applications

A separate Lens Unit can be attached to extend the sensing distance.

→ 26 Page

### Breaking Due to Snagging or Shock

The Fiber Unit can be protected from breaking with stainless steel spiral tube.

→ 40 Page (Excluding the E32-T11N 2M.)

### Build-in Lens

### What Are Fiber Units with Build-in Lenses?

These Fiber Units have built-in lenses. They feature high-power beams and narrow field of views (an aperture angle of 15°). You don't have to worry about the lens falling off and getting lost.

Fiber Sensor Features

Selection Guide


Fiber Units

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	
BGS	
Retro-reflective	Transparent Objects
Limited-reflective	
Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	
Area Detection	
Liquid-level	Applications
Vacuum	
FPD, Semi, Solar	
Installation Information	



Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions

Model Index

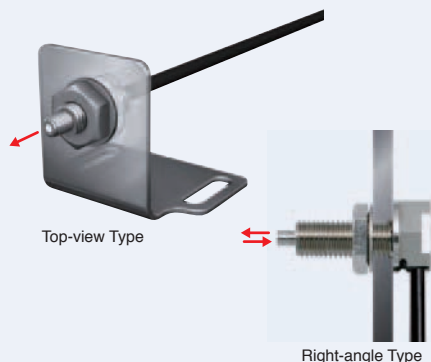

- Standard configuration. These Fiber Units are mounted into a hole drilled in a bracket and secured with nuts.
- The Right-angle Model prevents snagging on the cable because the cable runs along the mounting surface.

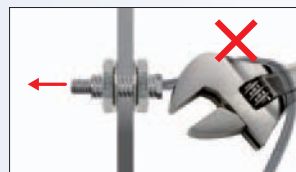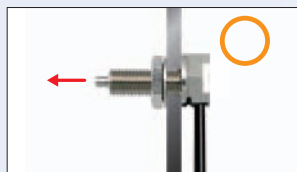

Hex-shaped Fiber Units have been added to the series.  
(They have a right-angle shape like that of the E32-C31N shown below.)  
→ 96 Page

## Specifications



## Reflective Fiber Units

Sensing direction (Aperture angle)	Size	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	09 Page Dimensions No.
				E3X-HD		E3NX-FA <b>NEW</b>				
				GIGA	HS	Other modes	GIGA			
Right-angle (Approx. 60°)	M3		Flexible, R4	110 46	ST : 50 SHS: 14	160 69	ST : 75 SHS: 14	(5 μm dia./ 2 μm dia.)	E32-C31N 2M	09-A
	M6			780 320	ST : 350 SHS: 100	1,170 480	ST : 520 SHS: 100		E32-C11N 2M	09-B
Top-view (Approx. 60°)	M3		Flexible, R1	140 40	ST : 60 SHS: 16	210 60	ST : 90 SHS: 16		E32-D21R 2M	09-C
			R25	330	ST : 150 SHS: 44	490 150	ST : 220 SHS: 44		E32-C31 2M	09-D
			R10	100					E32-C31M 1M	09-E
	M4		Flexible, R1	140 40	ST : 60 SHS: 16	210 60	ST : 90 SHS: 16		E32-D211R 2M	09-F
	M6			840 240	ST : 350 SHS: 100	1,260 360	ST : 520 SHS: 100		E32-D11R 2M	09-G
				R25	1,400 400	ST : 600 SHS: 180	2,100 600		ST : 900 SHS: 180	E32-CC200 2M
Top-view (Approx. 15°)	M6		R25	860 250	ST : 360 SHS: 110	1,290 370	ST : 540 SHS: 110	(1 dia./ 0.03 dia.)	E32-LD11 2M <b>NEW</b>	09-I
		Flexible, R1	840 240	ST : 350 SHS: 100	1,260 360	ST : 520 SHS: 100	E32-LD11R 2M <b>NEW</b>			

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.


**3.** The sensing distances for Reflective Fiber Units are for white paper. (The sensing distance for the E32-LD11 2M / E32-LD11R 2M are for glossy white paper.)

## Dimensions


Installation Information → 58, 59 Page

### Reflective Fiber Units


#### 09-A E32-C31N 2M (Free Cutting)

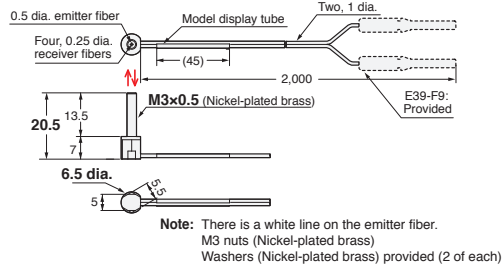


#### 09-B E32-C11N 2M (Free Cutting)

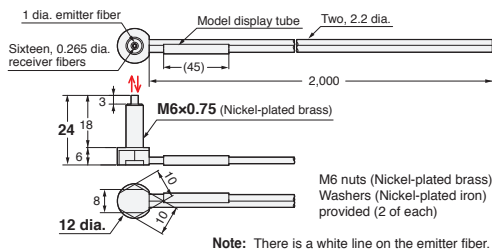


#### 09-C E32-D21R 2M (Free Cutting)

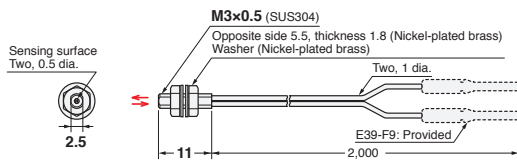


#### 09-D E32-C31 2M (Free Cutting)

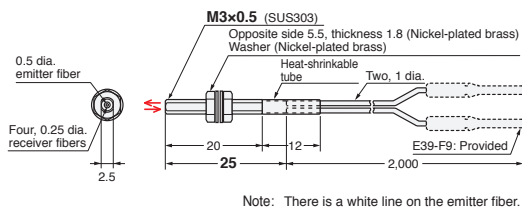


#### 09-E E32-C31M 1M (Free Cutting)

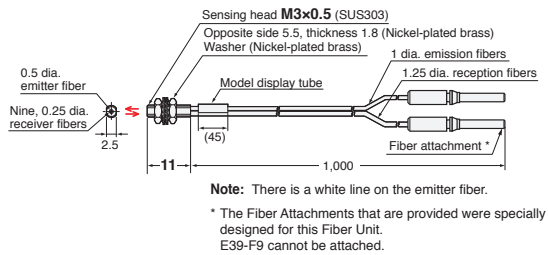


#### 09-F E32-D211R 2M (Free Cutting)

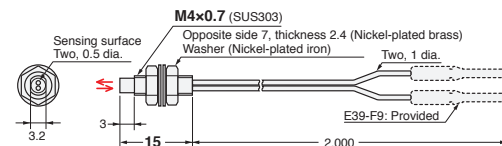

#### 09-G E32-D11R 2M (Free Cutting)

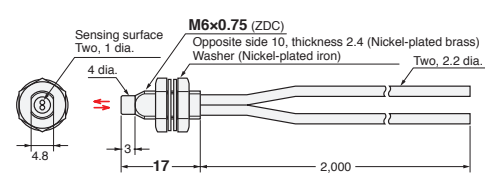


#### 09-H E32-CC200 2M (Free Cutting)

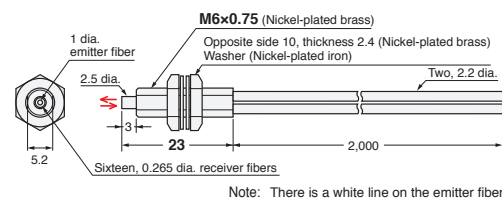

#### 09-I E32-LD11 2M (Free Cutting)


#### E32-LD11R 2M (Free Cutting)

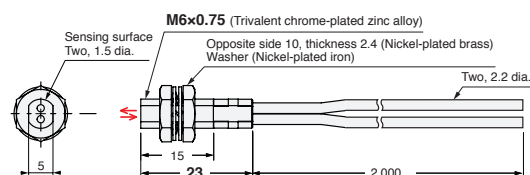

## - Reference Information for Model Selection -

### Features of Coaxial Reflective Type

These Fiber Units offer better detection of small objects at close distances (of 2 mm or less) than Standard Reflective Fiber Units. They also detect glossy surfaces more reliably than Standard Reflective Fiber Units, even if the surface is tilted. The receiver fibers are arranged around the emitter fiber as shown below.




### Features of the Right-angle Type

- Cable is less prone to snagging.
- Cable runs along the mounting surface for less space compared with Top-view Fiber Units.
- The nut is attached to the Fiber Unit to reduce installation work.

### What Is "Flexible" Fiber?

The flexible fiber has a small bending radius for easy routing without easily breaking. It is easy to use because the cable can be bent without significantly reducing light intensity.

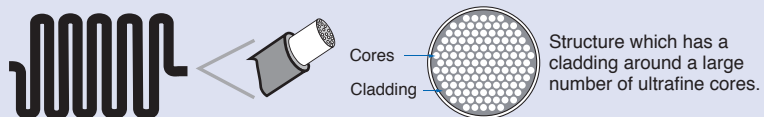

### Build-in Lens

### What Are Fiber Units with Build-in Lenses?

These Fiber Units have built-in lenses. They feature high-power beams and narrow field of views (an aperture angle of 15°). You don't have to worry about the lens falling off and getting lost.

And

### Breaking Due to Snagging or Shock

The Fiber Unit can be protected from breaking with stainless steel spiral tube.

→ 42 Page

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded  
Cylindrical  
Flat  
Sleeved

Small Spot  
High Power  
Narrow view  
BGS

Retro-reflective  
Limited-reflective

Chemical-resistant, Oil-resistant  
Bending  
Heat-resistant

Area Detection  
Liquid-level  
Vacuum

Applications


Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions


Model Index

Installation Information

09

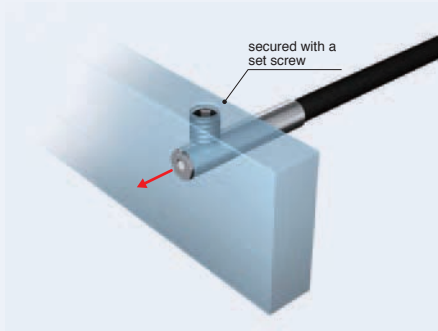

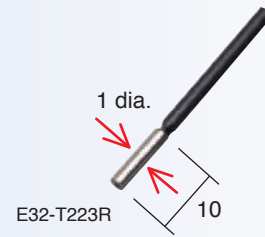



- Inserted where space is limited.  
(Secured using a set screw.)
- Ultimate space-saving by micro-fiber head. (1 dia. × 10 mm)



- Side-view models can be mounted where there is limited depth.

## Specifications

## Through-beam Fiber Units

Size	Sensing direction	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	11 Page Dimensions No.
				E3X-HD		E3NX-FA <i>NEW</i>				
				■GIGA ■HS	Other modes	■GIGA ■HS	Other modes			
1 dia.	Top-view		Flexible, R1	450 150	ST : 250 SHS: 60	670 220	ST : 370 SHS: 60	0.5 dia. (5 μm dia./ 2 μm dia.)	E32-T223R 2M	11-A
1.5 dia.			Bendresistant, R4	680 220	ST : 400 SHS: 90	1,020 330	ST : 600 SHS: 90		E32-T22B 2M	11-B
3 dia.		Side-view		Flexible, R1	2,000 700	ST : 1,000 SHS: 280	3,000 1,050	ST : 1,500 SHS: 280	1 dia. (5 μm dia./ 2 μm dia.)	E32-T12R 2M
			750 260		ST : 450 SHS: 100	1,120 390	ST : 670 SHS: 100	E32-T14LR 2M		11-D

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)


- 2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.  
The first value is for the E3X-HD and the second value is for the E3NX-FA.

### Dimensions


Installation Information → 60 Page

#### Through-beam Fiber Units (Set of 2)


##### 11-A E32-T223R 2M (Free Cutting)

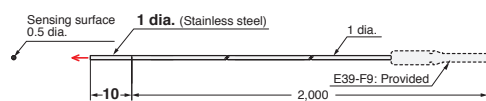


##### 11-B E32-T22B 2M (Free Cutting)

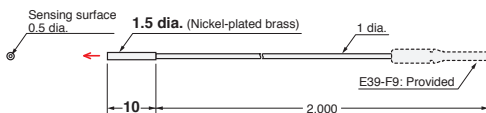

##### 11-C E32-T12R 2M (Free Cutting)

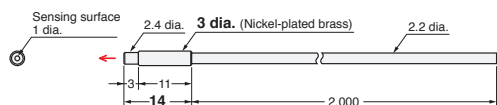


##### 11-D E32-T14LR 2M (Free Cutting)

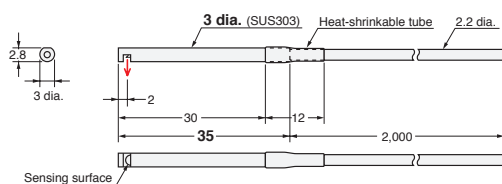

#### - Reference Information for Model Selection -

##### Recommended Mounting Hole Dimensions

The recommended mounting-hole dimensions for Cylindrical Fiber Units are given below.



(Unit: mm)

Outer diameter of Fiber Unit	1 dia.	1.5 dia.	3 dia.
Dimension F	1.2 <sup>+0.5</sup> <sub>0</sub> dia.	1.7 <sup>+0.5</sup> <sub>0</sub> dia.	3.2 <sup>+0.5</sup> <sub>0</sub> dia.

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded

Cylindrical

Standard Installation

Flat

Sleeved

Saving Space

Small Spot

High Power

Narrow  
view

BGS

Beam Improvements

Retro-  
reflective

Limited-  
reflective

Transparent Objects

Chemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistant

Environmental Immunity

Area  
Detection

Liquid-level

Vacuum

Applications

FPD,  
Semi,  
Solar


Installation  
Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

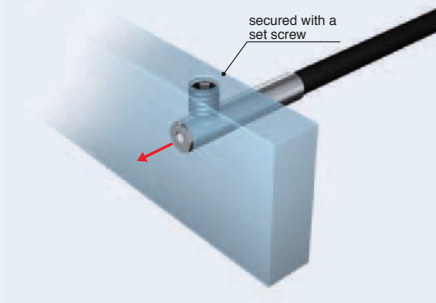





- Inserted where space is limited.  
(Secured using a set screw.)



## Specifications



## Reflective Fiber Units

Size	Sensing direction	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	13 Page Dimensions No.
				E3X-HD		E3NX-FA <b>NEW</b>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
1.5 dia.	Top-view		Bend-resistant, R4	■ 140 ■ 40	ST : 60 SHS: 16	■ 210 ■ 60	ST : 90 SHS: 16	(5 μm dia./ 2 μm dia.)	E32-D22B 2M	<b>13-A</b>
1.5 dia. + 0.5 dia.			R25	■ 28 ■ 8	ST : 12 SHS: 4	■ 42 ■ 12	ST : 18 SHS: 4		E32-D43M 1M	<b>13-B</b>
3 dia.			Flexible, R1	■ 140 ■ 40	ST : 60 SHS: 16	■ 210 ■ 60	ST : 90 SHS: 16		E32-D22R 2M	<b>13-C</b>
			Bend-resistant, R4	■ 300 ■ 90	ST : 140 SHS: 40	■ 450 ■ 130	ST : 210 SHS: 40		E32-D221B 2M	<b>13-D</b>
			R25	700 200	ST : 300 SHS: 90	1,050 300	ST : 450 SHS: 90		E32-D32L 2M	<b>13-E</b>
				■ 70 ■ 20	ST : 30 SHS: 8	■ 100 ■ 30	ST : 45 SHS: 8		E32-D33 2M	<b>13-F</b>

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.

The first value is for the E3X-HD and the second value is for the E3NX-FA.

**3.** The sensing distances for Reflective Fiber Units are for white paper.


### Dimensions

Installation Information → 58, 59 Page




### Reflective Fiber Units


**13-A E32-D22B 2M (No Cutting)**

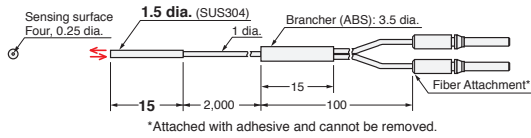


#### Enlarged View of Sensing Surface




**13-B E32-D43M 1M (No Cutting)**

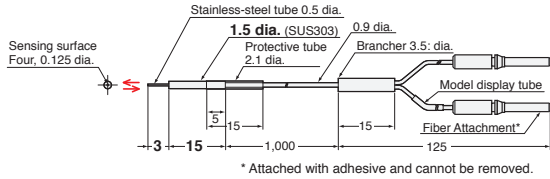


**13-C E32-D22R 2M (Free Cutting)**

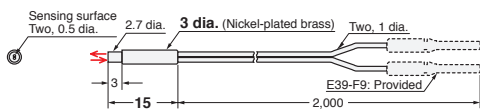


**13-D E32-D221B 2M (Free Cutting)**

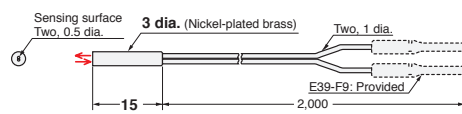

**13-E E32-D32L 2M (Free Cutting)**

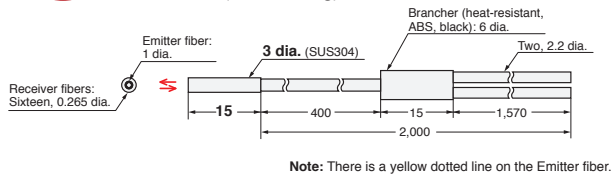

**13-F E32-D33 2M (Free Cutting)**

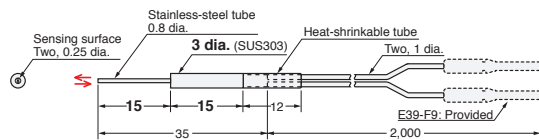

### - Reference Information for Model Selection -


#### Features of Coaxial Reflective Type

These Fiber Units offer better detection of small objects at close distances (of 2 mm or less) than Standard Reflective Fiber Units. They also detect glossy surfaces more reliably than Standard Reflective Fiber Units, even if the surface is tilted. The receiver fibers are arranged around the emitter fiber as shown below.



#### Recommended Mounting Hole Dimensions

The recommended mounting-hole dimensions for Cylindrical Fiber Units are given below.



	(Unit: mm)	
Outer diameter of Fiber Unit	1.5 dia.	3 dia.
Dimension F	1.7 <sup>+0.5</sup> <sub>0</sub> dia.	3.2 <sup>+0.5</sup> <sub>0</sub> dia.

Fiber Sensor Features

Selection Guide

Fiber Units

Threaded

Cylindrical

Standard Installation

Flat

Sleeved

Saving Space

Small Spot

High Power

Narrow view

BGS

Beam Improvements

Retro-reflective

Limited-reflective

Transparent Objects

Chemical-resistant, Oil-resistant

Bending

Heat-resistant

Environmental Immunity

Area Detection

Liquid-level

Vacuum

Applications

FPD, Semi, Solar

Installation Information

Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions

Model Index




## Dimensions

Installation Information → 60 Page




### Through-beam Fiber Units (Set of 2)

#### 15-A E32-T15XR 2M (Free Cutting)

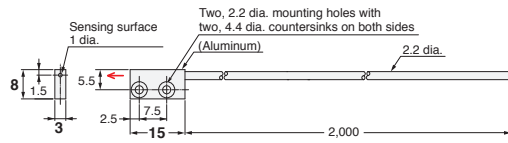


Note: 1. Set of two symmetrically shaped Fiber Units.  
2. Four, M2 x 8 stainless steel countersunk mounting screws are provided.

#### 15-B E32-T15YR 2M (Free Cutting)

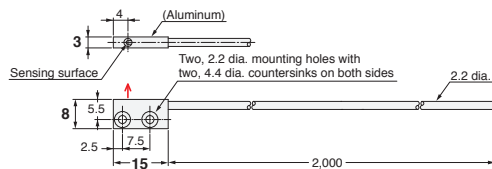

Note: 1. Set of two symmetrically shaped Fiber Units.  
2. Four, M2 x 8 stainless steel countersunk mounting screws are provided.

#### 15-C E32-T15ZR 2M (Free Cutting)

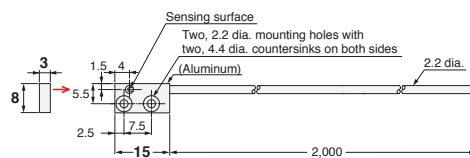


Note: 1. Set of two symmetrically shaped Fiber Units.  
2. Four, M2 x 8 stainless steel countersunk mounting screws are provided.

Installation Information → 58 Page




### Reflective Fiber Units

#### 15-D E32-D15XR 2M (Free Cutting)

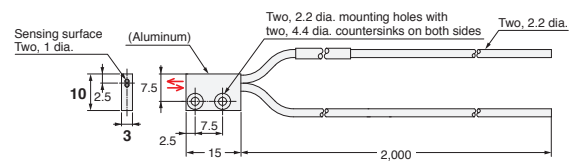


Note: Two, M2 x 8 stainless steel countersunk mounting screws are provided.

#### 15-E E32-D15YR 2M (Free Cutting)

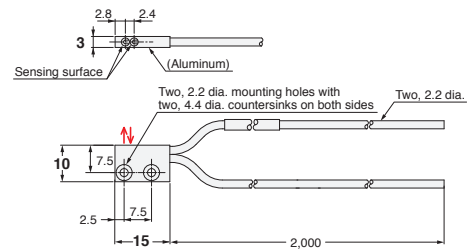

Note: Two, M2 x 8 stainless steel countersunk mounting screws are provided.

#### 15-F E32-D15ZR 2M (Free Cutting)

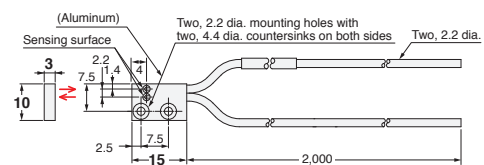

Note: Two, M2 x 8 stainless steel countersunk mounting screws are provided.

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflective

Limited-  
reflective

Chemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistant

Area  
Detection

Liquid-level

Vacuum


FPD,  
Semi,  
Solar

Installation  
Information


Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index





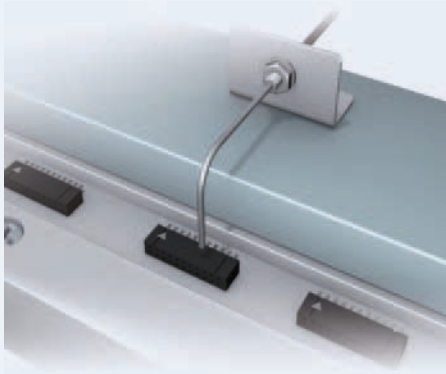


- Sleeve Fiber Units allow detection away from the point of installation for stable close-range detection of small objects.
- The shape of sleeve can be changed freely. (Refer to the sleeve bending specifications in the Appearance column of the specifications table.)



## Specifications

### Through-beam Fiber Units

Sensing direction	Appearance (mm)	Bending radius of cable	Sensing distance (mm)						Optical axis diameter (minimum sensing object)	Models	17 Page Dimensions No.
			E3X-HD			E3NX-FA <i>NEW</i>					
			■ GIGA ■ HS	Other modes		■ GIGA ■ HS	Other modes				
Side-view	The sleeve cannot be bent. 	Flexible, R1	■ 170 ■ 50	ST : 100 SHS: 20	■ 250 ■ 75	ST : 150 SHS: 20	0.5 dia. (5 μm dia./ 2 μm dia.)	E32-T24R 2M	(17-A)		
	The sleeve cannot be bent. 		■ 450 ■ 150	ST : 250 SHS: 60	■ 670 ■ 220	ST : 370 SHS: 60		E32-T24E 2M	(17-B)		
Top-view	The sleeve cannot be bent. 	R10	■ 150 ■ 50	ST : 90 SHS: 20	■ 220 ■ 75	ST : 130 SHS: 20	0.25 dia. (5 μm dia./ 2 μm dia.)	E32-T33 1M	(17-C)		
	The sleeve cannot be bent. 		■ 510 ■ 170	ST : 300 SHS: 68	■ 760 ■ 250	ST : 450 SHS: 68	0.5 dia. (5 μm dia./ 2 μm dia.)	E32-T21-S1 2M <i>NEW</i>	(17-D)		
	Sleeve bending radius: 5 mm 	Flexible, R1	■ 2,000 ■ 700	ST : 1,000 SHS: 280	■ 3,000 ■ 1,050	ST : 1,500 SHS: 280	1 dia. (5 μm dia./ 2 μm dia.)	E32-TC200BR 2M	(17-E)		

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

- 2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.


# Dimensions

Installation Information → 60, 61 Page




## Through-beam Fiber Units (Set of 2)


### (17-A) E32-T24R 2M (Free Cutting)

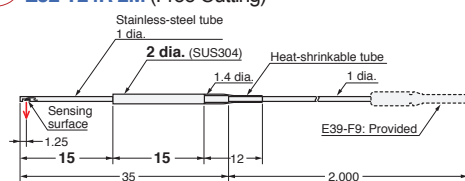


### (17-B) E32-T24E 2M (Free Cutting)

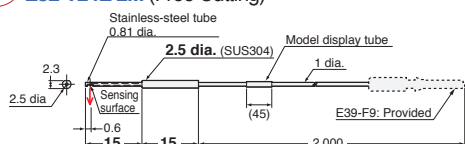


### (17-C) E32-T33 1M (Free Cutting)

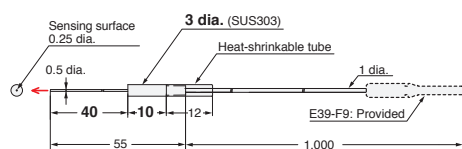

### (17-D) E32-T21-S1 2M (Free Cutting)

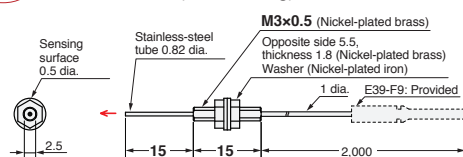

### (17-E) E32-TC200BR 2M (Free Cutting)

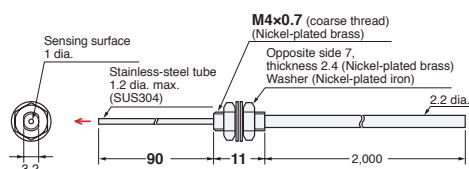

## - Reference Information for Model Selection -

And

### In case of bending sleeve

The E32-TC200BR has a bendable sleeve.  
Use the Sleeve Bender to bend them.

### Sleeve Bender (sold separately)

Appearance	Applicable Fiber Units	Model
Uses for the bending of the sleeve.	E32-TC200BR	E39-F11

Fiber Sensor  
Features

Selection  
Guide

Fiber Units


Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	
BGS	Transparent Objects
Retro-reflective	
Limited-reflective	
Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	
Area Detection	Applications
Liquid-level	
Vacuum	
FPD, Semi, Solar	

Installation  
Information


Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index


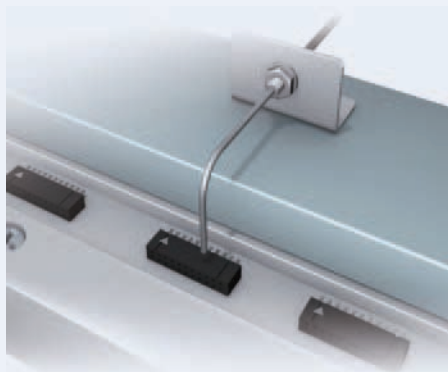












- Sleeve Fiber Units allow detection away from the point of installation for stable close-range detection of small objects.
- The shape of sleeve can be changed freely. (Refer to the sleeve bending specifications in the Appearance column of the specifications table.)



## Specifications

## Reflective Fiber Units

Sensing direction	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	19 Page Dimensions No.
			E3X-HD		E3NX-FA <b>NEW</b>				
			GIGA HS	Other modes	GIGA HS	Other modes			
Side-view		Flexible, R1	70 20	ST : 30 SHS: 8	100 30	ST : 45 SHS: 8	(5 μm dia./ 2 μm dia.)	E32-D24R 2M	19-A
		R25	120 45	ST : 53 SHS: 14	180 67	ST : 79 SHS: 14		E32-D24-S2 2M <b>NEW</b>	19-B
Top-view		R4	28 8	ST : 12 SHS: 4	42 12	ST : 18 SHS: 4		E32-D43M 1M	19-C
			14 4	ST : 6 SHS: 2	21 6	ST : 9 SHS: 2		E32-D331 2M	19-D
		R25	70 20	ST : 30 SHS: 8	100 30	ST : 45 SHS: 8		E32-D33 2M	19-E
		R4	63 18	ST : 27 SHS: 7	94 27	ST : 40 SHS: 7		E32-D32-S1 0.5M <b>NEW</b>	19-F
			18 4	ST : 6 SHS: 2	21 6	ST : 9 SHS: 2		E32-D31-S1 0.5M <b>NEW</b>	19-G
		Flexible, R1	140 40	ST : 60 SHS: 16	210 60	ST : 90 SHS: 16		E32-DC200F4R 2M	19-H
		R10	250 72	ST : 110 SHS: 30	370 100	ST : 160 SHS: 30		E32-D22-S1 2M <b>NEW</b>	19-I
			72 4	ST : 110 SHS: 30	370 100	ST : 160 SHS: 30		E32-D21-S3 2M <b>NEW</b>	19-J
		Flexible, R1	840 240	ST : 350 SHS: 100	1,260 360	ST : 520 SHS: 100		E32-DC200BR 2M	19-K
		R10	250 72	ST : 110 SHS: 30	370 100	ST : 160 SHS: 30		E32-D25-S3 2M <b>NEW</b>	19-L

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)  
[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.


**3.** The sensing distances for Reflective Fiber Units are for white paper.

### Dimensions


Installation Information → 58, 59 Page

### Reflective Fiber Units


**19-A E32-D24R 2M (Free Cutting)**

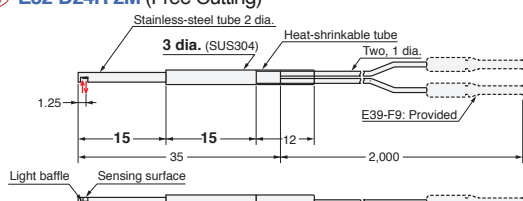


**19-B E32-D24-S2 2M (Free Cutting)**

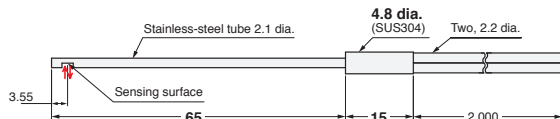


**19-C E32-D43M 1M (No Cutting)**

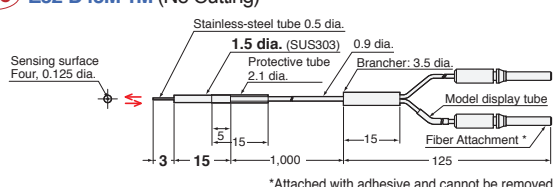


**19-D E32-D331 2M (No Cutting)**

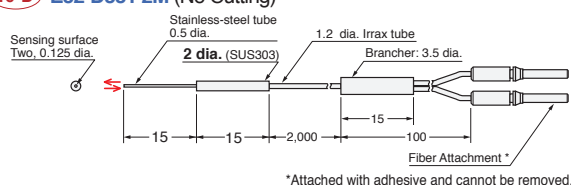


**19-E E32-D33 2M (Free Cutting)**

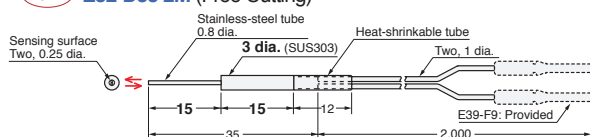


**19-F E32-D32-S1 0.5M (No Cutting)**

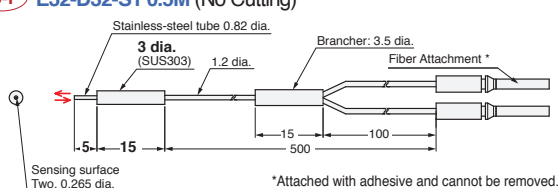


**19-G E32-D31-S1 0.5M (No Cutting)**

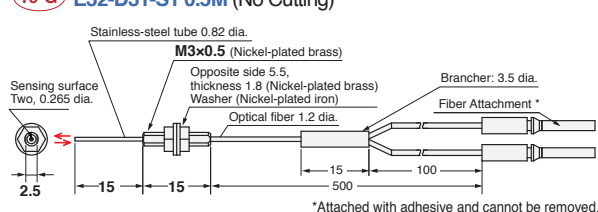


**19-H E32-DC200F4R 2M (Free Cutting)**

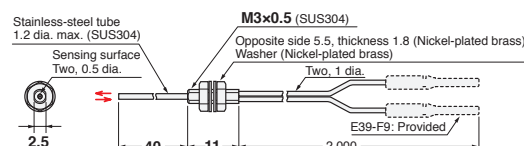


**19-I E32-D22-S1 2M (Free Cutting)**

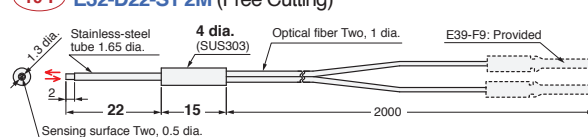


**19-J E32-D21-S3 2M (Free Cutting)**

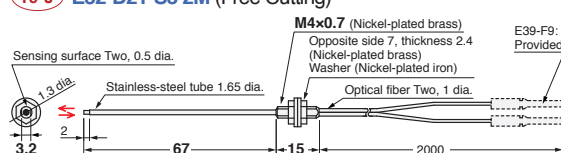

**19-K E32-DC200BR 2M (Free Cutting)**

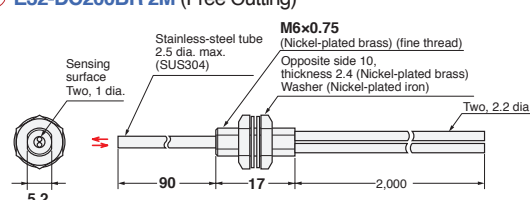

**19-L E32-D25-S3 2M (Free Cutting)**

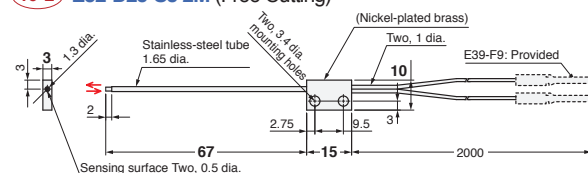


### - Reference Information for Model Selection -

And

#### In case of bending sleeve

The E32-DC200F4R, E32-D21-S3 and E32-D25-S3 have bendable sleeves. Use the Sleeve Bender to bend them.

Sleeve Bender (sold separately)

Appearance	Applicable Fiber Units	Model
 Uses for the bending of the sleeve.	E32-DC200F4R E32-D21-S3 E32-D25-S3	E39-F11

Fiber Sensor Features

Selection Guide

Fiber Units

Threaded	Standard Installation
Cylindrical	Standard Installation
Flat	Standard Installation
Sleeved	Saving Space
Small Spot	Beam Improvements
High Power	Beam Improvements
Narrow view	Beam Improvements
BGS	Beam Improvements
Retro-reflective	Transparent Objects
Limited-reflective	Transparent Objects
Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	Environmental Immunity
Heat-resistant	Environmental Immunity
Area Detection	Applications
Liquid-level	Applications
Vacuum	Applications
FDP, Semi, Solar	Applications
Installation Information	Installation Information



Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions

Model Index



- Small-spot is ideal for detecting minute objects. Select the Fiber Unit that is best suited for the workpiece size and installation distance. (Refer to Reference Information for Model Selection)
- Available with a variable-spot Lens Unit to change the spot diameter without replacing the fiber. The spot diameter can be adjusted according to the size of the workpiece by changing the withdrew length and sensing distance. Refer to the following graph, which shows the relation between the withdrew length, focal distance, and spot diameter.

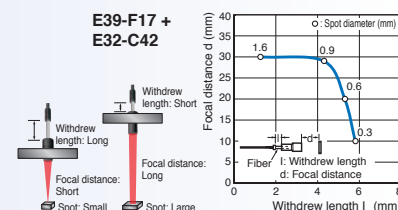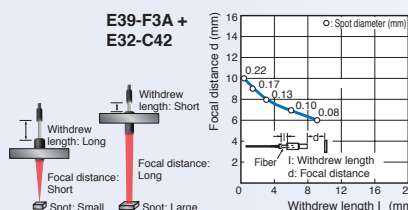

\* Withdrew length: Approx. 1.3 to 5.8 mm

## Specifications

### Reflective Fiber Units

#### Variable-spot types

##### Lens Units + Fiber Unit

Type	Spot diameter	Center distance (mm)	Lens Units	Lens Units + Fiber Units	Fiber Unit		21 Page Dimensions No.
			Models	Appearance (mm)	Bending radius of cable	Model	
Variable spot	0.1 to 0.6 dia.	6 to 15	<b>E39-F3A</b>		R25	<b>E32-C42 1M</b>	<b>21-A</b>
	0.3 to 1.6 dia.	10 to 30	<b>E39-F17</b>				<b>21-B</b>

#### Parallel-light-spot types

##### Lens Units + Fiber Unit

Type	Spot diameter	Center distance (mm)	Lens Units	Lens Units + Fiber Units	Fiber Unit		21 Page Dimensions No.
			Model	Appearance (mm)	Bending radius of cable	Models	
Parallel light	4 dia.	0 to 20	<b>E39-F3C</b>		R25	<b>E32-C31 2M</b>	<b>21-C</b>
					Flexible, R2	<b>E32-C21N 2M</b> <b>NEW</b>	<b>21-D</b>


#### Small-spot types

##### Integrated Lens

Type	Spot diameter	Center distance (mm)	Appearance (mm)	Bending radius of cable	Models	21 Page Dimensions No.
Short-distance, Small-spot	0.1 dia.	5	 Lens: unnecessary	R25	<b>E32-C42S 1M</b>	<b>21-E</b>
Long-distance, Small-spot	6 dia.	50	 Lens: unnecessary		<b>E32-L15 2M</b>	<b>21-F</b>

\* The spot diameter and the center distance are the same when using with E3X-HD series or E3NX-FA series.



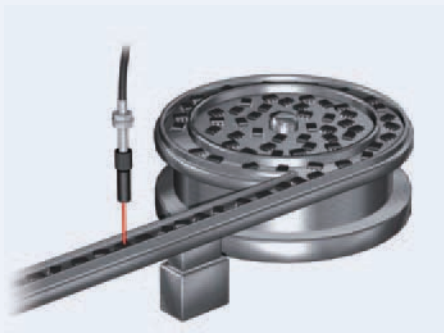

- Small-spot is ideal for detecting minute objects. Select the Fiber Unit that is best suited for the workpiece size and installation distance.  
(Refer to Reference Information for Model Selection)

## Specifications



## Reflective Fiber Units

## Small-spot Models

## Lens Units + Fiber Units

Type	Spot diameter	Center distance (mm)	Lens Units	Lens Units + Fiber Units	Fiber Units		23 Page Dimensions No.
			Models	Appearance(mm)	Bending radius of cable	Models	
Short-distance, small-spot	0.1 dia.	7	E39-F3A-5		R25	E32-C41 1M	23-A
	0.5 dia.					E32-C31 2M	23-B
					Flexible, R2	E32-C21N 2M <b>NEW</b>	23-C
Medium-distance, small-spot	0.2 dia.	17	E39-F3B		R25	E32-C41 1M	23-D
	0.5 dia.					E32-C31 2M	23-E
					Flexible, R2	E32-C21N 2M <b>NEW</b>	23-F
Long-distance, small-spot	3 dia.	50	E39-F18		R25	E32-CC200 2M	23-G
					Flexible, R4	E32-C11N 2M	23-H


\* The spot diameter and the center distance are the same when using with E3X-HD series or E3NX-FA series.

## Dimensions

Installation Information → 58, 61 Page


### Reflective Fiber Units

#### 23-A E32-C41 1M (No Cutting) + E39-F3A-5

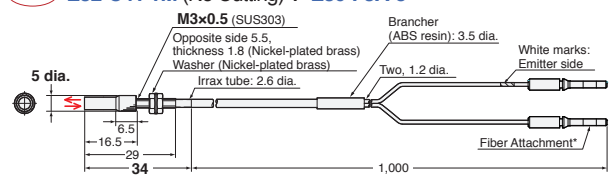


\* Attached with adhesive and cannot be removed.  
Note: There is a white tube on the emitter fiber.

#### 23-B E32-C31 2M (Free Cutting) + E39-F3A-5

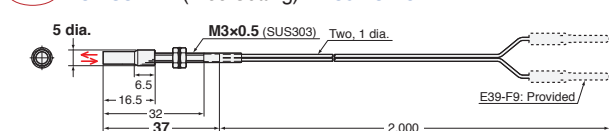

Note: There is a white line on the emitter fiber.


#### E39-F3A-5

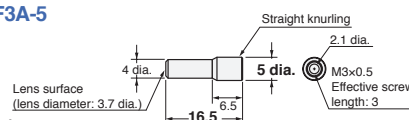

Material:  
Aluminum for body and optical glass for lens


Note: This is a Lens Unit for the E32-C41, E32-C31 and E32-C31N.

#### 23-C E32-C21N 2M (Free Cutting) + E39-F3A-5

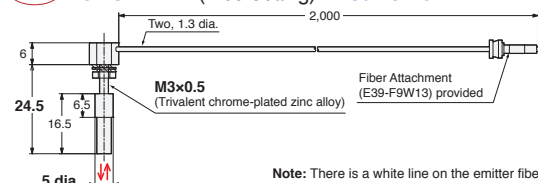


Note: There is a white line on the emitter fiber.

#### 23-D E32-C41 1M (No Cutting) + E39-F3B

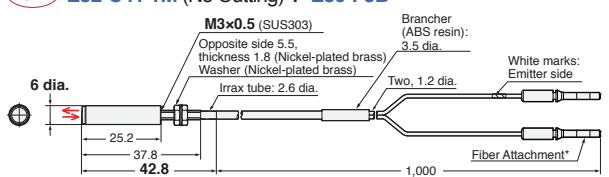


\* Attached with adhesive and cannot be removed.  
Note: There is a white tube on the emitter fiber.

#### 23-E E32-C31 2M (Free Cutting) + E39-F3B

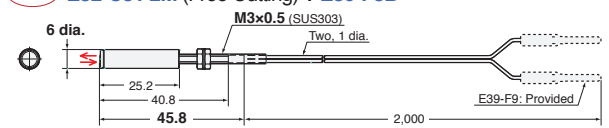

Note: There is a white line on the emitter fiber.


#### E39-F3B



Material:  
Aluminum for body and optical glass for lens


Note: This is a Lens Unit for the E32-C41, E32-C31 and E32-C31N.

#### 23-F E32-C21N 2M (Free Cutting) + E39-F3B

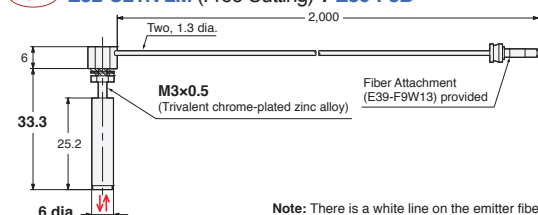


Note: There is a white line on the emitter fiber.

#### 23-G E32-CC200 2M (Free Cutting) + E39-F18

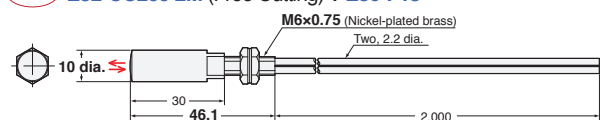


Note: There is a white line on the emitter fiber.

#### 23-H E32-C11N 2M (Free Cutting) + E39-F18

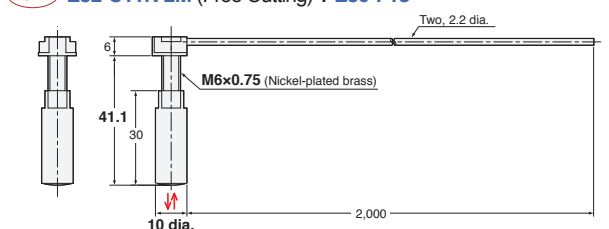

Note: There is a white line on the emitter fiber.

#### E39-F18



Material:  
Aluminum for body and optical glass for lens

Note: This is a Lens Unit for the E32-C11N and E32-CC200.

## - Reference Information for Model Selection -

### Model Selection Tips

Select the best model by following these steps.

1. Select the model based on the spot diameter suitable for the workpiece size.

\* The Variable-spot Type is useful if there are different sensing object sizes.

2. Select the model based on the allowable installation distance and center distance.

### <Map of Spot Diameters and Center Distances>

(Unit: mm)

Spot diameter	0.1 dia.	0.1 dia.	0.2 dia.	0.5 dia.	0.5 dia.	3 dia.	4 dia.	6 dia.
Center distance	5	7	17	7	17	50	0 to 20	50
Optical axis diameter	2.4	3.7	4.8	3.7	4.8	9.4	3.7	10
Models	E32-C42S	E39-F3A-5 + E32-C41	E39-F3B + E32-C41	E39-F3A-5 + E32-C31 E32-C21N	E39-F3B + E32-C31 E32-C21N	E39-F18 + E32-CC200 E32-C11N	E39-F3C + E32-C31 E32-C21N	E32-L15

\* Refer to page 20 for details.

Fiber Sensor Features

Selection Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant, Oil-resistant

Bending

Heat-resistant

Area Detection

Liquid-level

Vacuum


FPD, Semi, Solar

Installation Information

Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions



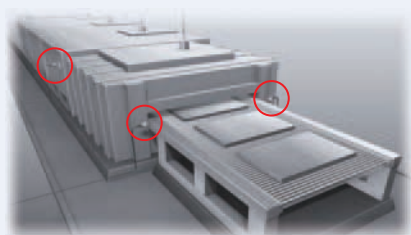





















Model Index



- Maximum sensing distance without attaching a Lens: 20 m (E32-T17L)  
Suitable for detection of large objects and for use in large-scale installations.
- Powerful enough to resist the influences of dust and dirt.  
(Refer to the comparisons of incident level on the Reference Information for Model Selection.)
- In addition to the products listed on this page, Lenses are available to extend the sensing distance. (→ 26 to 29 pages)

## Specifications


## Through-beam Fiber Units

Sensing direction	Aperture angle	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	25 Page Dimensions No.
				E3X-HD		E3NX-FA <i>NEW</i>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Right-angle	15°		Flexible, R2	 4,000 *1	ST : 3,500	 4,000 *1	ST : 4,000	2.3 dia. (0.1 dia./0.03 dia.)	<b>E32-LT11N 2M</b> <i>NEW</i>	<b>(25-A)</b>
				 2,300	SHS: 920	 3,450	SHS: 920			
Top-view	10°		R25	 20,000 *2	ST : 20,000	 20,000 *2	ST : 20,000	10 dia.	<b>E32-T17L 10M</b>	<b>(25-B)</b>
	 20,000 *2			SHS: 8,000	 20,000 *2	SHS: 8,000				
	15°		Flexible, R1	 4,000 *1	ST : 4,000	 4,000 *1	ST : 4,000	2.3 dia. (0.1 dia./0.03 dia.)	<b>E32-LT11 2M</b> <i>NEW</i>	<b>(25-C)</b>
				 2,700	SHS: 1,080	 4,000 *1	SHS: 1,080			
				 4,000 *1	ST : 3,500	 4,000 *1	ST : 4,000		<b>E32-LT11R 2M</b> <i>NEW</i>	
				 2,300	SHS: 920	 3,450	SHS: 920			
Side-view	30°		R25	 4,000 *1	ST : 4,000	 4,000 *1	ST : 4,000	4 dia. (0.1 dia./0.03 dia.)	<b>E32-T14 2M</b>	<b>(25-D)</b>
				 4,000 *1	SHS: 1,800	 4,000 *1	SHS: 1,800			

\*1 The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

\*2 The optical fiber is 10 m long on each side, so the sensing distance is 20,000 mm.

## Reflective Fiber Units

Sensing direction	Aperture angle	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Model	25 Page Dimensions No.
				E3X-HD		E3NX-FA <i>NEW</i>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Top-view	4°		Bendresistant, R4	40 to 2,800 ■ 40 to 900	ST : 40 to 1,400 SHS: 40 to 480	40 to 4,000 ■ 40 to 1,350	ST : 40 to 2,100 SHS: 40 to 480	—	E32-D16 2M	25-E

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.


The first value is for the E3X-HD and the second value is for the E3NX-FA.

**3.** The sensing distances for Reflective Fiber Units are for white paper.


Dimensions

Through-beam Fiber Units (Set of 2)


(25-A) E32-LT11N 2M (Free Cutting)

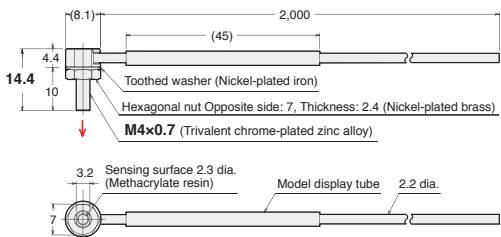


(25-C) E32-LT11 2M (Free Cutting)  
E32-LT11R 2M (Free Cutting)

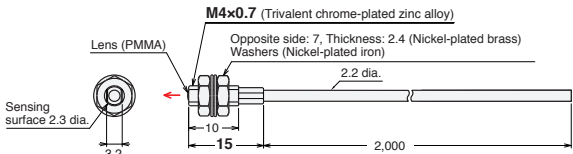

(25-B) E32-T17L 10M (Free Cutting)

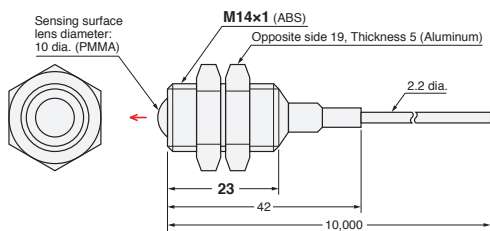


(25-D) E32-T14 2M (Free Cutting)

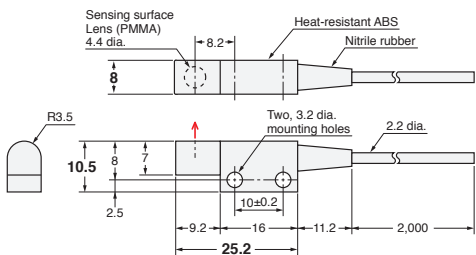

Reflective Fiber Units

(25-E) E32-D16 2M (Free Cutting)

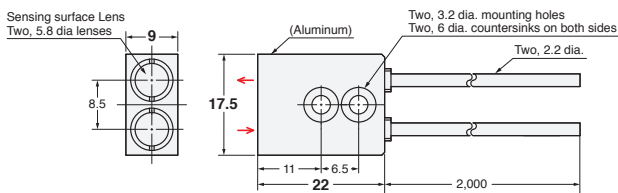


- Reference Information for Model Selection -


Comparisons of incident level

Select the model based on the comparisons of incident level against Standard Fiber Units.

Comparisons of incident level (Through-beam)

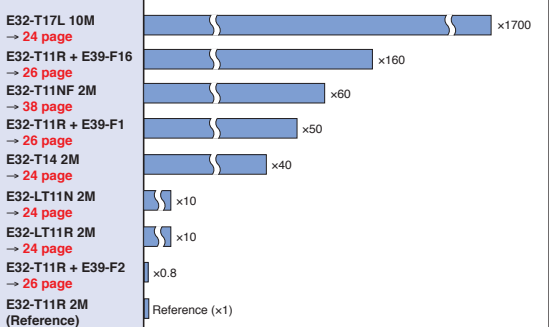





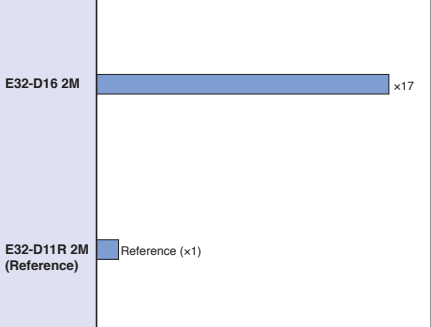


Comparisons of incident level (Reflective)



## Specifications

## Through-beam Fiber Units

Fiber Units	Lens Units	Type	High-power (incident level: 50 times)		Ultra-high-power (incident level: 160 times)		Side-View (incident level: 0.8 times)						
		Models	E39-F1		E39-F16		E39-F2						
		Appearance	 (26-A)		 (26-B)		 (26-C)						
		Aperture angle	Approx. 12°		Approx. 6°		Approx. 60°						
		Optical axis diameter (minimum sensing object)	4 dia. (0.1 dia.)		7.2 dia.		3 dia. (0.1 dia.)						
Models	Appearance (mm)		Sensing distance (mm)										
E32-T11N 2M		E3X-HD		E3NX-FA <b>NEW</b>		E3X-HD		E3NX-FA <b>NEW</b>		E3X-HD		E3NX-FA <b>NEW</b>	
		■GIGA=HS	Other modes	■GIGA=HS	Other modes	■GIGA=HS	Other modes	■GIGA=HS	Other modes	■GIGA=HS	Other modes	■GIGA=HS	Other modes
E32-T11N 2M		4,000* 4,000* ■	ST : 4,000 SHS: 2,000 (27-A)	4,000* 4,000* ■	ST : 4,000 SHS: 2,000	4,000* 4,000* ■	ST : 4,000 SHS: 3,600 (27-D)	4,000* 4,000* ■	ST : 4,000 SHS: 3,600	— — ■	— — ■	— — ■	— — ■
E32-T11R 2M		4,000* 4,000* ■	ST : 4,000 SHS: 2,000 (27-B)	4,000* 4,000* ■	ST : 4,000 SHS: 2,000	4,000* 4,000* ■	ST : 4,000 SHS: 3,600 (27-E)	4,000* 4,000* ■	ST : 4,000 SHS: 3,600	1,450 500 ■	ST : 800 SHS: 200 (27-G)	2,170 750 ■	ST : 1,200 SHS: 200
E32-T11 2M		4,000* 4,000* ■	ST : 4,000 SHS: 1,860 (27-C)	4,000* 4,000* ■	ST : 4,000 SHS: 1,860	4,000* 4,000* ■	ST : 4,000 SHS: 4,000 (27-F)	4,000* 4,000* ■	ST : 4,000 SHS: 4,000	2,300 860 ■	ST : 1,320 SHS: 320 (27-H)	3,450 1,290 ■	ST : 1,980 SHS: 320

\* The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)


[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.

## Dimensions


Installation Information → 61 Page

## Lens Units (Set of 2)

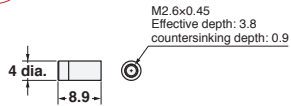**26-A** E39-F1


**Material:**  
Brass for the body and optical glass for the lens itself.

**Note:** Two per set.

**26-B** E39-F16

**Material:**  
SUS303 for the body and optical glass for the lens itself.

**Note:** Two per set.

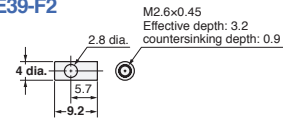**26-C** E39-F2

**Material:**  
Brass for the body and optical glass for the lens itself.


**Note:** Two per set.

## Dimensions


Installation Information → 60, 61 Page

### Through-beam Fiber Units (Set of 2)


#### (27-A) E32-T11N 2M (Free Cutting) + E39-F1

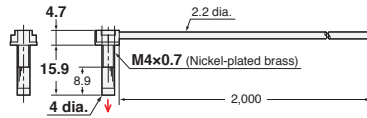


#### (27-B) E32-T11R 2M (Free Cutting) + E39-F1

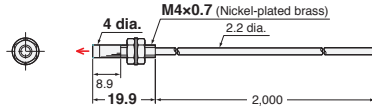


#### (27-C) E32-T11 2M (Free Cutting) + E39-F1




#### (27-D) E32-T11N 2M (Free Cutting) + E39-F16

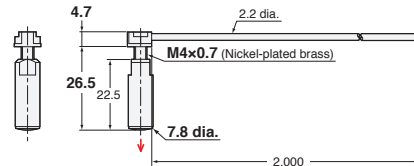


#### (27-E) E32-T11R 2M (Free Cutting) + E39-F16

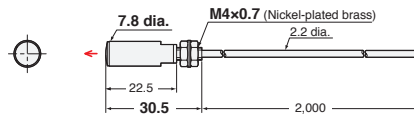


#### (27-F) E32-T11 2M (Free Cutting) + E39-F16

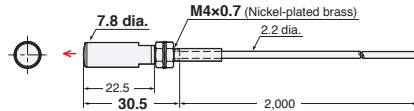

#### (27-G) E32-T11R 2M (Free Cutting) + E39-F2

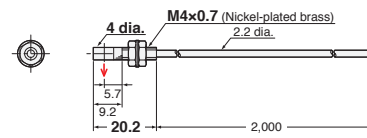

#### (27-H) E32-T11 2M (Free Cutting) + E39-F2

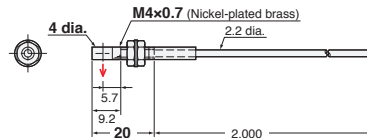


## - Reference Information for Model Selection -

### Comparisons of incident level

Select the model based on the comparisons of incident level against Standard Fiber Units.

#### Comparisons of incident level (Through-beam)

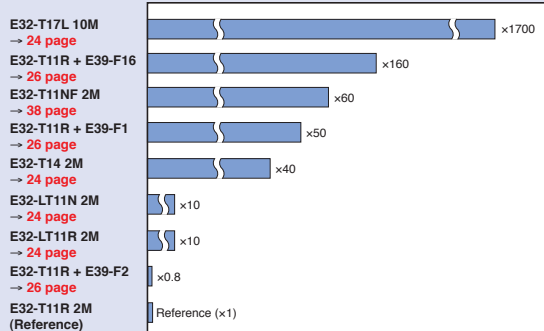

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflective

Limited-  
reflective

Chemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistant

Area  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

Installation  
Information







Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

## Specifications

## Through-beam Fiber Units (Heat-resistant)

Lens Units		Type	High-power (incident level: 50 times)		Ultra-high-power (incident level: 160 times)		Side-View (incident level: 0.8 times)						
		Models	E39-F1		E39-F16		E39-F2						
		Appearance	 (28-A)		 (28-B)		 (28-C)						
		Aperture angle	Approx. 12°		Approx. 6°		Approx. 60°						
		Optical axis diameter (minimum sensing object)	4 dia. (0.1 dia.)		7.2 dia.		3 dia. (0.1 dia.)						
Fiber Units													
Models	Appearance (mm)	Sensing distance (mm)											
		E3X-HD		E3NX-FA <b>NEW</b>		E3X-HD		E3NX-FA <b>NEW</b>		E3X-HD		E3NX-FA <b>NEW</b>	
		■GIGA=HS	Other modes	■GIGA=HS	Other modes	■GIGA=HS	Other modes	■GIGA=HS	Other modes	■GIGA=HS	Other modes	■GIGA=HS	Other modes
E32-T51R 2M	Heat-resistant up to 100°C 	4,000* ■ 3,900 ■	ST : 4,000* ■ SHS: 1,500 ■ (29-A)	4,000* ■ 4,000* ■	ST : 4,000* ■ SHS: 1,500 ■	4,000* ■ 4,000* ■ (29-D)	4,000* ■ 4,000* ■	ST : 4,000* ■ SHS: 4,000* ■	4,000* ■ 4,000* ■	1,400 ■ 500 ■	ST : 720 ■ SHS: 200 ■ (29-G)	2,100 ■ 750 ■	ST : 1,080 ■ SHS: 200 ■
E32-T81R-S 2M	Heat-resistant up to 200°C 	4,000* ■ 2,700 ■	ST : 4,000* ■ SHS: 1,000 ■ (29-B)	4,000* ■ 4,000* ■	ST : 4,000* ■ SHS: 1,000 ■	4,000* ■ 4,000* ■ (29-E)	4,000* ■ 4,000* ■	ST : 4,000* ■ SHS: 1,800 ■ (29-E)	4,000* ■ 4,000* ■	1,000 ■ 360 ■	ST : 550 ■ SHS: 140 ■ (29-H)	1,500 ■ 540 ■	ST : 820 ■ SHS: 140 ■
E32-T61-S 2M	Heat-resistant up to 350°C (200°C) (See Note 3) 	4,000* ■ 4,000* ■	ST : 4,000* ■ SHS: 1,800 ■ (29-C)	4,000* ■ 4,000* ■	ST : 4,000* ■ SHS: 1,800 ■	4,000* ■ 4,000* ■ (29-F)	4,000* ■ 4,000* ■	ST : 4,000* ■ SHS: 3,100 ■ (29-F)	4,000* ■ 4,000* ■	1,680 ■ 600 ■	ST : 900 ■ SHS: 240 ■ (29-I)	2,520 ■ 900 ■	ST : 1,350 ■ SHS: 240 ■

\* The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.




[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

2. The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.

3. The ambient temperature of E32-T61-S must be between -40 to 200°C when using it with E39-F1 or E39-F2 Lens Unit.

The ambient temperature of E32-T61-S must be between -40 to 350°C when using it with E39-F16 Lens Unit.

Fiber Units		Lens Units	Type	High-power (incident level: 50 times)	Ultra-high-power (incident level: 160 times)				
		Models		E39-F1-33	E39-F16				
		Appearance		 (28-D)	 (28-B)				
		Aperture angle		Approx. 12°	Approx. 6°				
		Optical axis diameter (minimum sensing object)		4 dia. (0.1 dia.)	7.2 dia.				
Models	Appearance (mm)	Sensing distance (mm)							
		E3X-HD		E3NX-FA <b>NEW</b>		E3X-HD		E3NX-FA <b>NEW</b>	
		GIGA=HS	Other modes	GIGA=HS	Other modes	GIGA=HS	Other modes	GIGA=HS	Other modes
			4,000* 2,300 SHS: 1,400 (29-J)	4,000* 3,450 SHS: 1,400 (29-K)	4,000* 4,000* SHS: 4,000 (29-K)	4,000* 4,000* SHS: 4,000 (29-K)	4,000* 4,000* SHS: 4,000 (29-K)	4,000* 4,000* SHS: 4,000 (29-K)	4,000* 4,000* SHS: 4,000 (29-K)

\* The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)


[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

2. The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.

## Dimensions


Installation Information → 61 Page

## Lens Units (Set of 2)

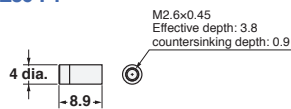**(28-A) E39-F1**


**Material:**  
Brass for the body and optical glass for the lens itself.

**Note:** Two per set.

**(28-B) E39-F16**


**Material:**  
SUS303 for the body and optical glass for the lens itself.

**Note:** Two per set.

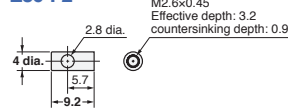**(28-C) E39-F2**

**Material:**  
Brass for the body and optical glass for the lens itself.

**Note:** Two per set.

**(28-D) E39-F1-33**

**Material:**  
Brass for the body and optical glass for the lens itself.

**Note 1:** Two per set.


**Note 2:** This is the Lens Unit for the E32-T51.

## Dimensions


Installation Information → 60, 61 Page

### Through-beam Fiber Units (Set of 2)


**(29-A) E32-T51R 2M (Free Cutting) + E39-F1**

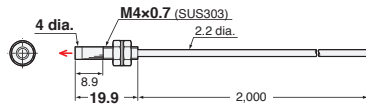


**(29-B) E32-T81R-S 2M (No Cutting) + E39-F1**

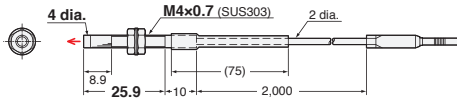


**(29-C) E32-T61-S 2M (No Cutting) + E39-F1**

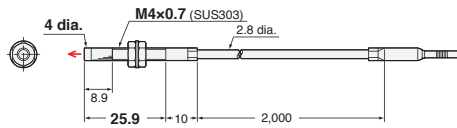


**(29-G) E32-T51R 2M (Free Cutting) + E39-F2**

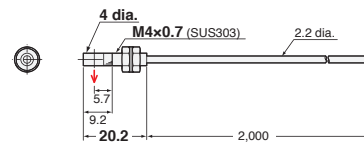


**(29-H) E32-T81R-S 2M (No Cutting) + E39-F2**

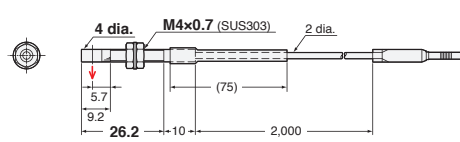


**(29-I) E32-T61-S 2M (No Cutting) + E39-F2**

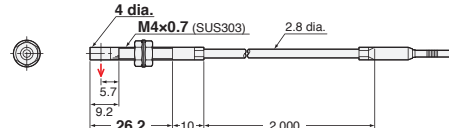


**(29-D) E32-T51R 2M (Free Cutting) + E39-F16**




**(29-E) E32-T81R-S 2M (No Cutting) + E39-F16**

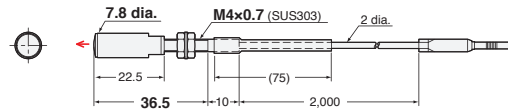


**(29-F) E32-T61-S 2M (No Cutting) + E39-F16**

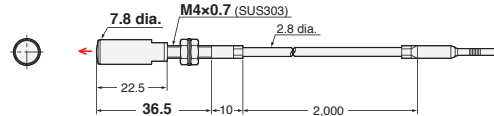

**(29-J) E32-T51 2M (Free Cutting) + E39-F1-33**

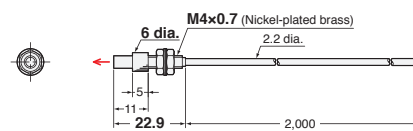

**(29-K) E32-T51 2M (Free Cutting) + E39-F16**

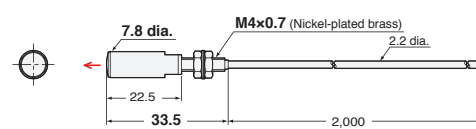


## - Reference Information for Model Selection -

### Comparisons of incident level

Select the model based on the comparisons of incident level against Standard Fiber Units.

#### Comparisons of incident level (Through-beam)

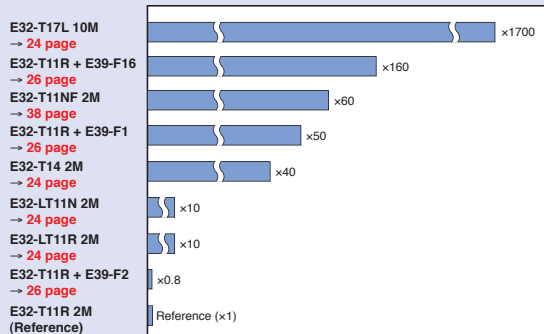

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflective

Limited-  
reflective

Chemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistant

Area  
Detection

Liquid-level

Vacuum


FPD,  
Semi,  
Solar

Installation  
Information


Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

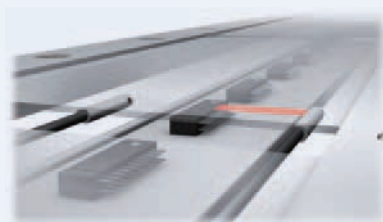

- The fine beam prevents false detection of light that is reflected off surrounding objects.



## Specifications

## Through-beam Fiber Units

Sensing direction	Aperture angle	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	31 Page Dimensions No.
				E3X-HD		E3NX-FA <i>NEW</i>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Side-view	1.5°	 Thickness: 3 mm IP50	Flexible, R1	3,220	ST : 1,780	4,000*	ST : 2,670	2 dia. (0.1 dia./ 0.03 dia.)	E32-A03 2M	31-A
		 Thickness: 3 mm IP50	R10	1,200	SHS: 500	1,800	SHS: 500		E32-A03-1 2M	31-B
	3.4°	 Thickness: 2 mm IP50	R10	1,280 450	ST : 680 SHS: 200	1,920 670	ST : 1,020 SHS: 200	1.2 dia. (0.1 dia./ 0.03 dia.)	E32-A04 2M	31-C
		4°	 IP50	Flexible, R1	4,000* 1,460	ST : 2,200 SHS: 580	4,000* 2,190	ST : 3,300 SHS: 580	2 dia. (0.1 dia./ 0.03 dia.)	E32-T24SR 2M
	 IP50		R10	4,000* 1,740	ST : 2,600 SHS: 700	4,000* 2,610	ST : 3,900 SHS: 700	E32-T24S 2M		31-E
	Top-view		 IP50	R10	4,000* 2,500	ST : 3,800 SHS: 1,000	4,000* 3,750	ST : 4,000 SHS: 1,000	1.7 dia. (0.1 dia./ 0.03 dia.)	E32-T22S 2M

\* The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)


**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.

### Dimensions

Installation Information → 58, 60 Page


#### Through-beam Fiber Units (Set of 2)

**(31-A) E32-A03 2M (Free Cutting)**

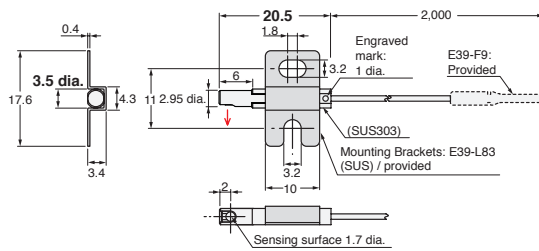

**Note:** Use the engraved surface and its opposing surface as installation (reference) surfaces.


**(31-B) E32-A03-1 2M (Free Cutting)**

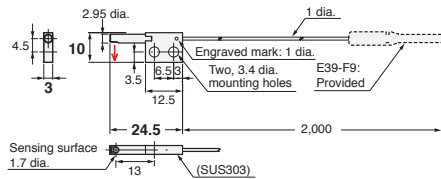

**Note 1:** Use the engraved surface and its opposing surface as installation (reference) surfaces.


**Note 2:** Set of two symmetrically shaped Fiber Units.

**(31-C) E32-A04 2M (Free Cutting)**

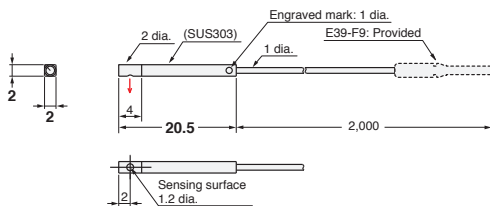


**Note:** Use the engraved surface and its opposing surface as installation (reference) surfaces.


**(31-D) E32-T24SR 2M (Free Cutting)**

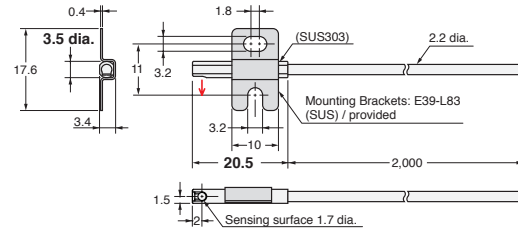

**(31-E) E32-T24S 2M (Free Cutting)**

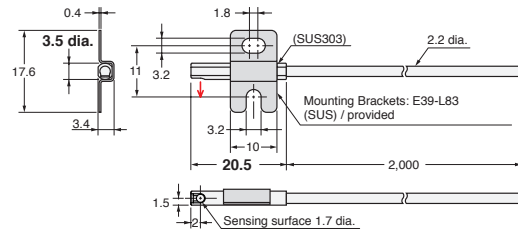


**(31-F) E32-T22S 2M (Free Cutting)**



### - Reference Information for Model Selection -

#### Aperture angle and Optical Axis Diameter

The Aperture angle is the output angle of the emitted beam, and the optical axis diameter is the core diameter of the emitter fiber. A fiber with a narrow view has a larger optical axis diameter than standard fibers, but the aperture angle is smaller so it is not influenced by surrounding objects.



Fiber Sensor Features

Selection Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant, Oil-resistant

Bending

Heat-resistant

Area Detection

Liquid-level

Vacuum

FPD, Semi, Solar

Installation Information

Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions

Model Index

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS


Retro-  
reflectiveLimited-  
reflectiveChemical-  
resistant,  
Oil-resistant

Bending


Heat-  
resistantArea  
Detection

Liquid-level

Vacuum

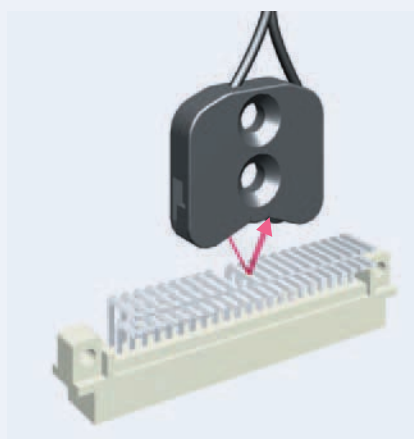FPD,  
Semi,  
Solar

- These Fiber Units detect only objects in the sensing range. Objects in the background that are located beyond a certain point are not detected. They are not easily affected by the material or color of the sensing object.

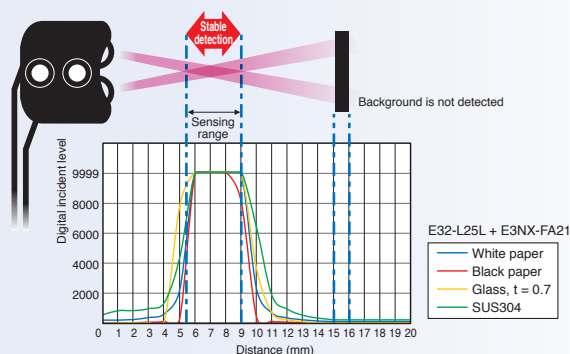

## Specifications

## Limited-reflective Fiber Units

Sensing direction	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Standard sensing object (minimum sensing object)	Models	33 Page Dimensions No.
			E3X-HD		E3NX-FA <i>NEW</i>				
			■GIGA ■HS	Other modes	■GIGA ■HS	Other modes			
Flat-view		R25	0 to 15 0 to 15 SHS: 0 to 12	ST : 0 to 15 SHS: 0 to 12	0 to 15 0 to 15 SHS: 0 to 12	ST : 0 to 15 SHS: 0 to 12	Soda glass with reflection factor of 7%	E32-L16-N 2M	33-A
		R10	0 to 4 0 to 4 SHS: 0 to 4	ST : 0 to 4 SHS: 0 to 4	0 to 4 0 to 4 SHS: 0 to 4	ST : 0 to 4 SHS: 0 to 4	(5 μm dia./ 2 μm dia.)	E32-L24S 2M	33-B
Side-view			5.4 to 9 5.4 to 9 (Center 7.2)	ST : 5.4 to 9 SHS: 5.4 to 9 (Center 7.2)	5.4 to 9 5.4 to 9 (Center 7.2)	ST : 5.4 to 9 SHS: 5.4 to 9 (Center 7.2)		E32-L25L 2M	33-C

**Note 1.** If operation is affected by the background, perform power tuning or use the ECO Mode to decrease the incident light level.

**2.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)  
[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

**3.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.


**4.** The sensing distances for Reflective Fiber Units are for white paper.

### Dimensions


Installation Information → 59 Page

### Limited-reflective Fiber Units


#### (33-A) E32-L16-N 2M (Free Cutting)

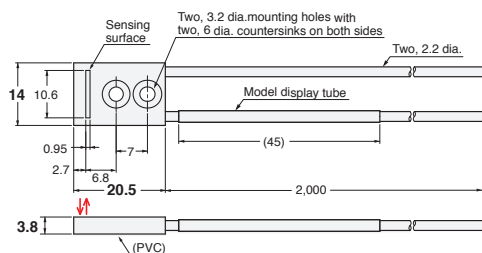

#### (33-B) E32-L24S 2M (Free Cutting)

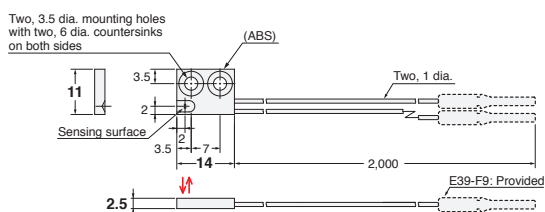


#### (33-C) E32-L25L 2M (Free Cutting)

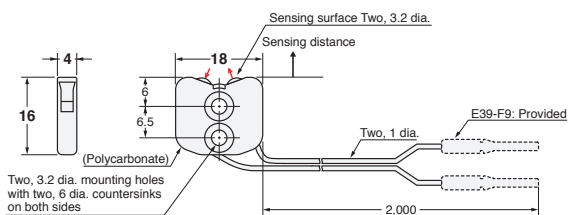

### - Reference Information for Model Selection -

#### Sensing Distance vs. Digital Value

The following graphs show how the digital value is high within the sensing range and small outside. This explains why false detection does not occur outside the sensing range, even against common metal backgrounds, such as stainless steel.

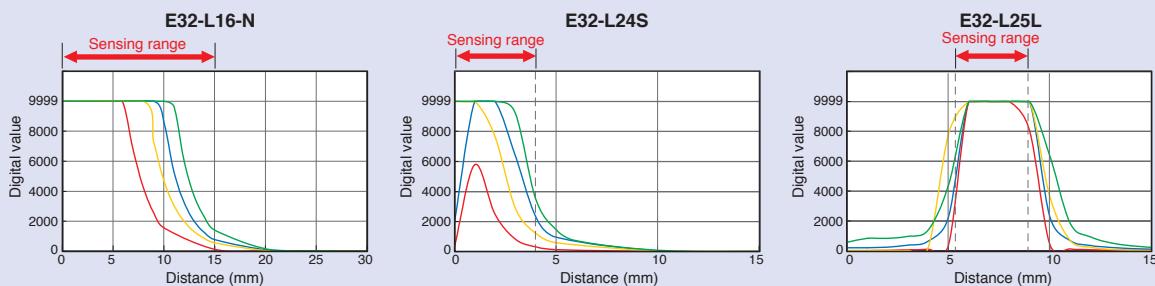

\* E3NX-FA21 used in high-speed (HS) mode

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant,  
Oil-resistant

Bending

Heat-resistant

Area  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

Installation  
Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective


Chemical-resistant,  
Oil-resistant

Heat-resistant


Area  
Detection

Liquid-level

Vacuum


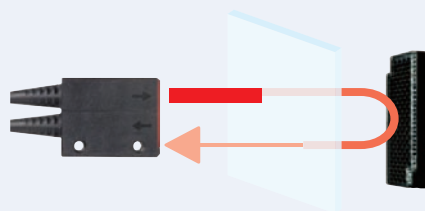
FPD,  
Semi,  
Solar

- Retro-reflective Fiber Units are ideal for detecting transparent objects. The light beam passes through the object twice, this model interrupts light more than Through-beam model.

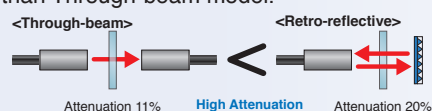



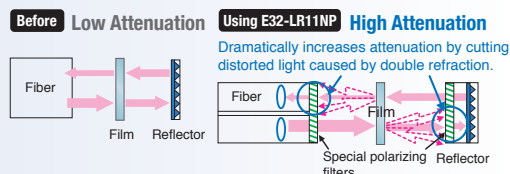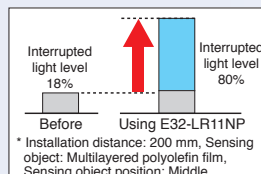











- Excellent detection performance with transparent films. (E32-LR11NP + E39-RP1)

The specially designed filter eliminates undesirable light, which allows significantly more light to be interrupted for stable detection of films.



## Specifications

### Retro-reflective Fiber Units (With M.S.R. Function)

Type		Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	35 Page Dimensions No.
Features	Size			E3X-HD		E3NX-FA <i>NEW</i>				
				 GIGA=HS	Other modes	 GIGA=HS	Other modes			
Film detection *	M6		Flexible, R2	 1,350 1,000	ST : 1,200 SHS: 550	 2,020 1,500	ST : 1,800 SHS: 550	—	E32-LR11NP 2M + E39-RP1 <i>NEW</i>	
Square	—		R25	 150 to 1,500 150 to 1,500	ST : 150 to 1,500 SHS: 150 to 1,500	 150 to 1,500 150 to 1,500	ST : 150 to 1,500 SHS: 150 to 1,500	(0.2 dia./ 0.07 dia.)	E32-R16 2M	
Threaded Models	M6		R10	 10 to 250 10 to 250	ST : 10 to 250 SHS: 10 to 250	 10 to 370 10 to 370	ST : 10 to 370 SHS: 10 to 250	(0.1 dia./ 0.03 dia.)	E32-R21 2M	

\* This effect may not be as strong for some films. Check suitability beforehand.

**Note 1.** Objects with a high reflection factor may cause the Fiber Sensor to detect reflected light as incident light. Also, stable detection may not be possible for transparent objects. Check suitability beforehand.

**2.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

**3.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.


### Dimensions

Installation Information → 58, 59 and 61 Page




### Retro-reflective Fiber Units (With M.S.R. Function)


#### (35-A) E32-LR11NP 2M (Free Cutting)

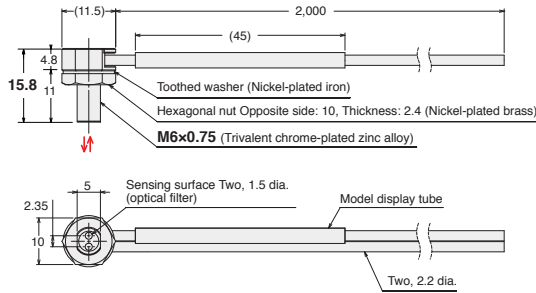


#### E39-RP1

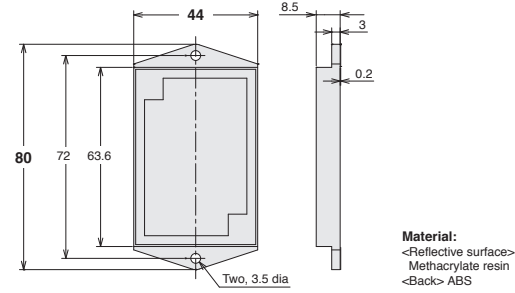


#### (35-B) E32-R16 2M (Free Cutting)

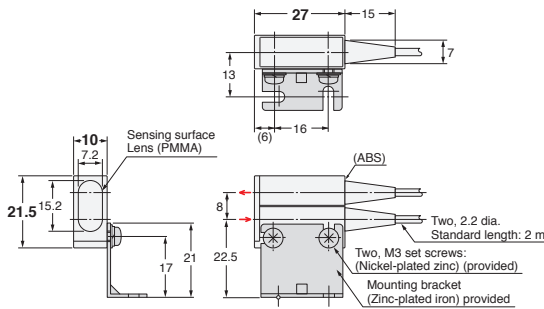


#### E39-R1 (Provided)

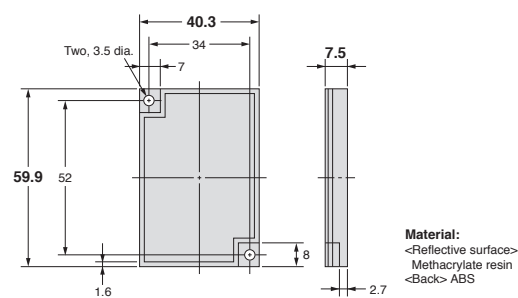

#### (35-C) E32-R21 2M (Free Cutting)

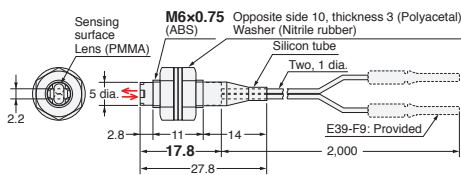

#### E39-R3 (Provided)

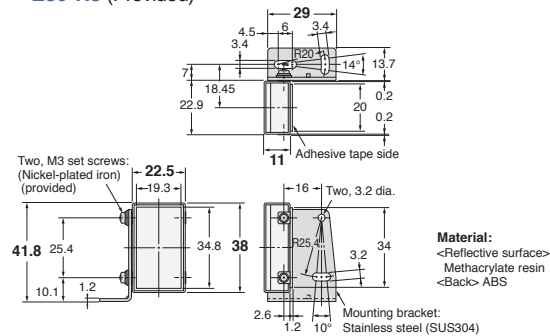

### - Reference Information for Model Selection -

#### Performance Comparison of Transparent Object Detection



For detecting transparent objects, consider using following products together: E32-LR11NP 2M + E39-RP1.

- This configuration features a special built-in optical filter that ensures stable detection of double-refractive materials, such as films and PET bottles.
- The retro-reflective model is suitable for detecting glass.

Sensing object	Film wrapper on cigarette packs	PET bottles	Glass bottles	Plate glass, t: 0.7
<b>Models</b>				
E32-LR11NP 2M + E39-RP1	○	○	○	○
E32-R16 2M	△	△	○	○
E32-R21 2M	△	△	○	○

#### E32-LR11NP Usage in Combination with a Sheet Reflector

Reference values of sensing distance are provided in the following table.

Reflector shape (mm)	Sensing distance (mm) (reference values)				Models
	E3X-HD		E3NX-FA <i>NEW</i>		
	■GIGA■HS	Other modes	■GIGA■HS	Other modes	
	<div><div></div><div>550</div></div> <div><div></div><div>430</div></div>	ST : 500 SHS: 250	<div><div></div><div>820</div></div> <div><div></div><div>640</div></div>	ST : 750 SHS: 250	<b>E39-RSP1</b>
	<div><div></div><div>210</div></div> <div><div></div><div>160</div></div>	ST : 190 -	<div><div></div><div>310</div></div> <div><div></div><div>240</div></div>	ST : 280 -	<b>E39-RP37</b>

Fiber Sensor Features

Selection Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant, Oil-resistant

Bending

Heat-resistant

Area Detection

Liquid-level

Vacuum

FPD, Semi, Solar

Installation Information

Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions

Model Index

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant,  
Oil-resistant


Bending

Heat-resistant


Area Detection

Liquid-level

Vacuum

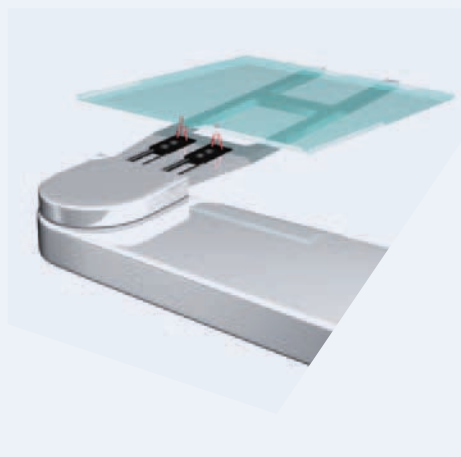



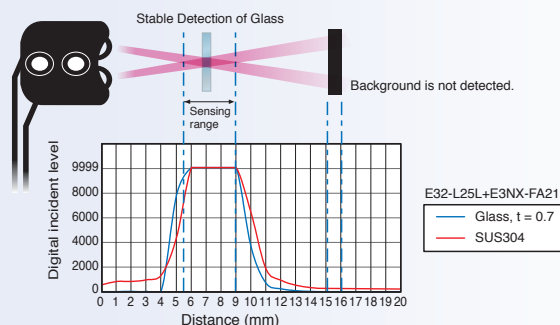

FPD,  
Semi,  
Solar

- These Fiber Units are based on a limited-reflective optical system where the emitting light and receiving light axes intersect at the same angle. This allows for stable detection of glass because the Fiber Units receives the specular reflection of the glass when the glass is in the sensing range.



## Specifications

## Limited-reflective Fiber Units

Type		Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Standard sensing object (minimum sensing object)	Models	37 Page Dimensions No.
Features	Detection direction			E3X-HD		E3NX-FA <b>NEW</b>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Small size	Flat-view	 14 2.5 11 IP50	R10	■ 0 to 4 ■ 0 to 4	ST : 0 to 4 SHS: 0 to 4	■ 0 to 4 ■ 0 to 4	ST : 0 to 4 SHS: 0 to 4	(5 μm dia./ 2 μm dia.)	<b>E32-L24S 2M</b>	<b>37-A</b>
Standard		 20.5 3.8 14 IP40	R25	■ 0 to 15 ■ 0 to 15	ST : 0 to 15 SHS: 0 to 12	■ 0 to 15 ■ 0 to 15	ST : 0 to 15 SHS: 0 to 12	Soda glass with reflection factor of 7%	<b>E32-L16-N 2M</b>	<b>37-B</b>
Glass-substrate alignment, 70°C		 24.5 51 14 IP40		■ 10 to 20 ■ 10 to 20	ST : 10 to 20 SHS: -	■ 10 to 20 ■ 10 to 20	ST : 10 to 20 SHS: -		<b>E32-A08 2M</b>	<b>37-C</b>
Standard long distance		 24.5 51 14 IP40		■ 12 to 30 ■ 12 to 30	ST : 12 to 30 SHS: -	■ 12 to 30 ■ 12 to 30	ST : 12 to 30 SHS: -		<b>E32-A12 2M</b>	<b>37-D</b>
Side View form	Side-view	 18 4 16 IP50	R10	■ 5.4 to 9 ■ 5.4 to 9 (Center 7.2)	ST : 5.4 to 9 SHS: 5.4 to 9 (Center 7.2)	■ 5.4 to 9 ■ 5.4 to 9 (Center 7.2)	ST : 5.4 to 9 SHS: 5.4 to 9 (Center 7.2)	(5 μm dia./ 2 μm dia.)	<b>E32-L25L 2M</b>	<b>37-E</b>
Glass-substrate Mapping, 70°C	Top-view	 23 9 20 IP40	R25	15 to 38 15 to 38 (Center 25)	ST : 15 to 38 (Center 25) SHS: -	15 to 38 15 to 38 (Center 25)	ST : 15 to 38 (Center 25) SHS: -	End surface of soda glass with reflection factor of 7% (t = 0.7 mm, rounded edges)	<b>E32-A09 2M</b>	<b>37-F</b>

\* If operation is affected by the background, perform power tuning to decrease the incident light level.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.

The first value is for the E3X-HD and the second value is for the E3NX-FA.


**3.** The sensing distances for Reflective Fiber Units are for white paper.

## Dimensions


Installation Information → 58, 59 Page

### Limited-reflective Fiber Units


#### (37-A) E32-L24S 2M (Free Cutting)

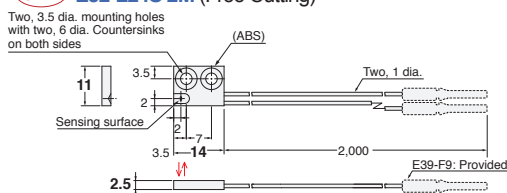


#### (37-B) E32-L16-N 2M (Free Cutting)

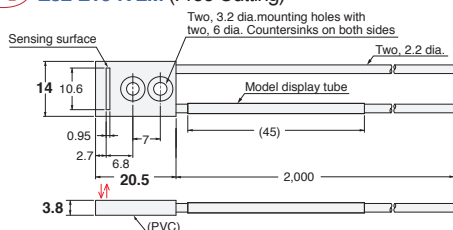


#### (37-C) E32-A08 2M (Free Cutting)

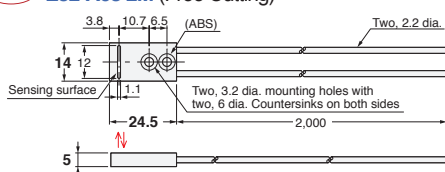


#### (37-D) E32-A12 2M (Free Cutting)

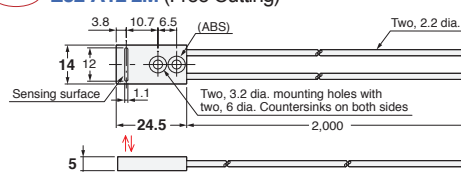

#### (37-E) E32-L25L 2M (Free Cutting)

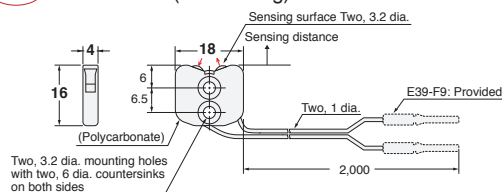

#### (37-F) E32-A09 2M (Free Cutting)

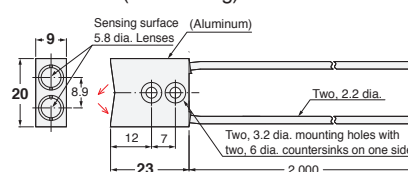


## - Reference Information for Model Selection -

### Sensing Distance vs. Digital Value

Limited-reflective Fiber Unit can keep high digital value within the sensing area for glass.

The digital value gets lower out of the sensing area for metals, including SUS (common as background).

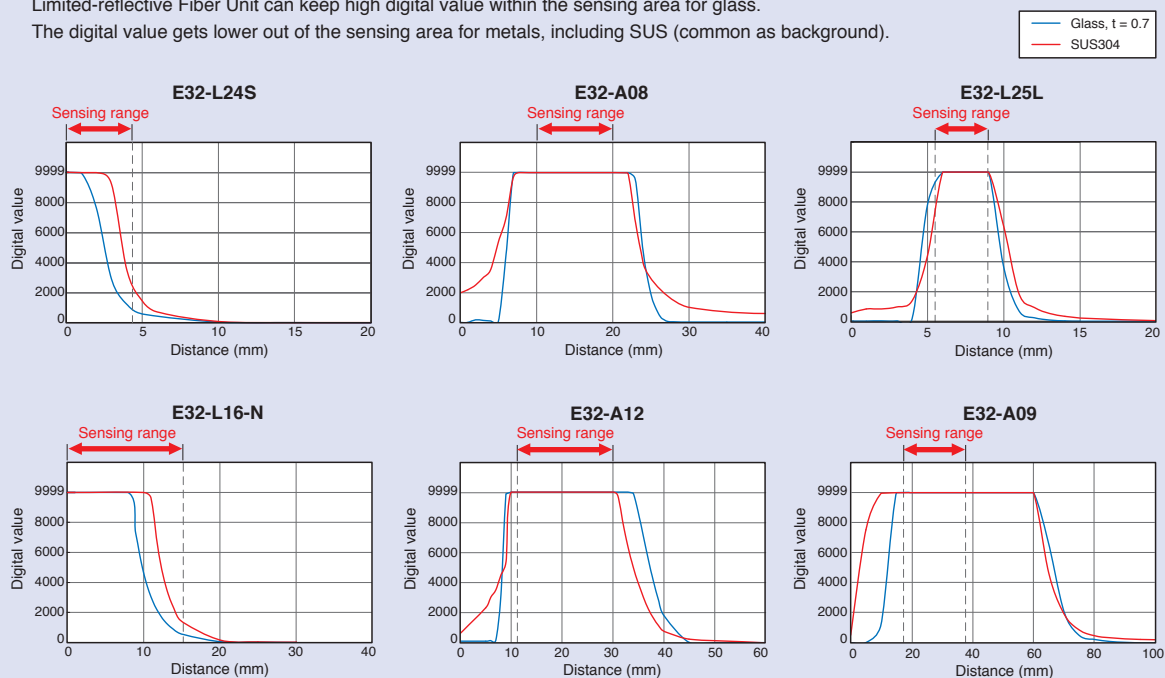

\* E3NX-FA21 used in high-speed (HS) mode.

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	Transparent Objects
BGS	

Retro-reflective	Transparent Objects
Limited-reflective	

Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	Applications


Area Detection	Applications
Liquid-level	
Vacuum	Accessories
FPD, Semi, Solar	

Installation  
Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

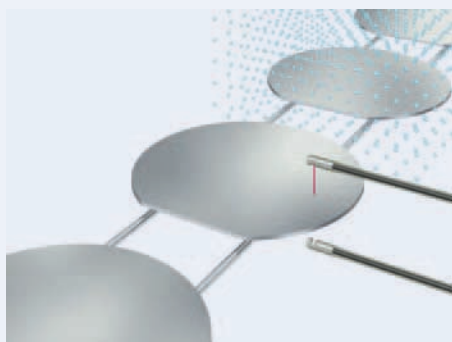

- These Fiber Units are made from fluororesin for resistance to chemicals.






Chemical-resistant Data for Fluororesin (Reference)

Material	Fluororesin	Acryl	ABS	Polycarbonate	Polyethylene	PVC
Chemical						
Hydrochloric acid	○	△	△	△	△	×
Sulfuric acid	○	×	×	×	×	×
Sodium hydroxide	○	△	△	×	○	×
Methyl alcohol	○	×	△	×	○	×
Acetone	○	×	×	×	△	×
Toluene	○	△	×	×	△	×
Benzene	○	△	△	×	△	×

Note: Results depend on concentration.

## Specifications





### Through-beam Fiber Units

Type	Sensing direction	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	39 Page Dimensions No.
				E3X-HD		E3NX-FA <i>NEW</i>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Oil-resistant	Right-angle		Flexible, R1	4,000 *1	*1	4,000 *1	*1	4 dia. (0.1 dia./ 0.03 dia.)	E32-T11NF 2M	39-A
				4,000 *1	ST : 4,000	4,000 *1	ST : 4,000			
Chemical/ oil resistant	Top-view		R40	4,000 *1	*1	4,000 *1	*1		E32-T12F 2M	39-B
				4,000 *1	ST : 4,000	4,000 *1	ST : 4,000			
	Side-view		R4	4,000 *1	*1	4,000 *1	*1	E32-T11F 2M	39-C	
				2,600	ST : 4,000	3,900	ST : 4,000			
Chemical/ oil resistant 150°C *2	Top-view		R40	1,400	ST : 800	2,100	ST : 1,200	E32-T14F 2M	39-D	
				500	SHS: 200	750	SHS: 200			
Chemical/ oil resistant 150°C *2	Top-view		R40	4,000 *1	*1	4,000 *1	*1	E32-T51F 2M	39-E	
				1,800	ST : 2,800	2,700	ST : 4,000			

\*1 The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

\*2 For continuous operation, use the Fiber Unit between -40 and 130°C.

### Reflective Fiber Units

Type	Sensing direction	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Standard sensing object (minimum sensing object)	Models	39 Page Dimensions No.
				E3X-HD		E3NX-FA <b>NEW</b>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Semiconductors: Cleaning, developing, and etching, 60°C	Top-view		R40	8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm) 19 to 31 mm from center of mounting hole A (Recommended sensing distance: 22 mm)				Glass (t=0.7 mm)	<b>E32-L11FP 2M</b>	<b>39-F</b>
Semiconductors: Resist stripping, 85°C				8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm) 32 to 44 mm from center of mounting hole A (Recommended sensing distance: 35 mm)						
Chemical/oil resistant			R4	GIGA – 130	ST : 190 SHS: 60	GIGA – 190	ST : 280 SHS: 60	(5 μm dia./ 2 μm dia.)	<b>E32-D12F 2M</b>	<b>39-H</b>
Only cable: chemical resistant				■ 840 240	ST : 350 SHS: 100	■ 1,260 360	ST : 520 SHS: 100			

Note 1. The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

2. The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.

3. The sensing distances for Reflective Fiber Units are for white paper.


### Dimensions

Installation Information → 60 Page




### Through-beam Fiber Units (Set of 2)


#### (39-A) E32-T11NF 2M (Free Cutting)

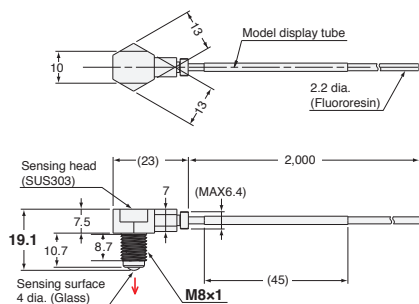


#### (39-B) E32-T12F 2M (Free Cutting)

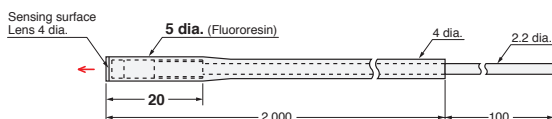


#### (39-C) E32-T11F 2M (Free Cutting)

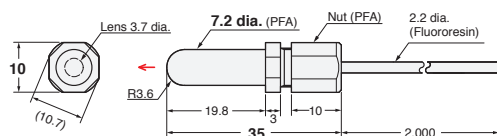

#### (39-D) E32-T14F 2M (Free Cutting)

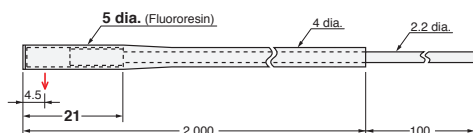

#### (39-E) E32-T51F 2M (Free Cutting)

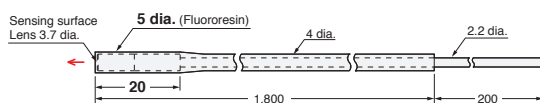


Installation Information → 58, 59 Page




### Reflective Fiber Units


#### (39-F) E32-L11FP 2M (Free Cutting)

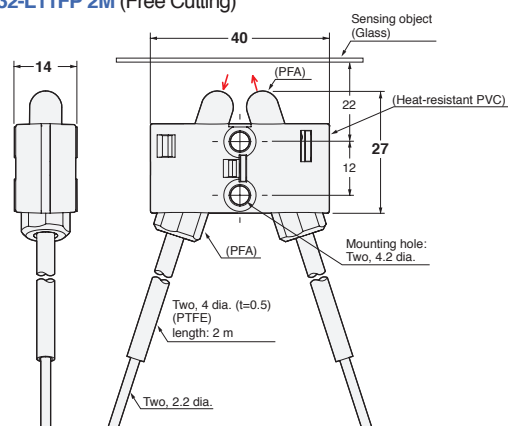


#### (39-G) E32-L11FS 2M (Free Cutting)

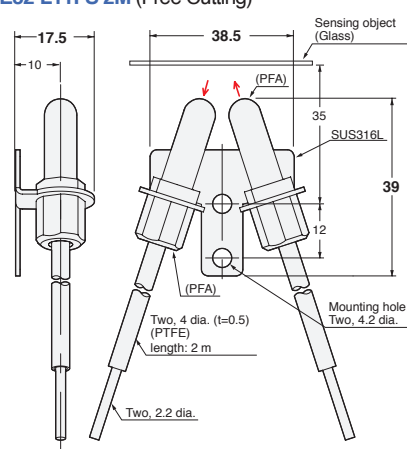

#### (39-H) E32-D12F 2M (Free Cutting)

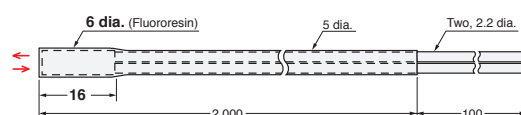

#### (39-I) E32-D11U 2M (Free Cutting)

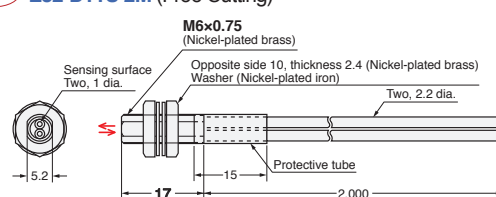

### - Reference Information for Model Selection -


#### Oil-resistance performance of the E32-T11NF

This diagram explains why the new E32-T11NF is oil resistant.

Vacuum resin filling to prevent oils from entering.

IP68g protection (See. Note)

A fluororesin cable prevents water or oils from entering.

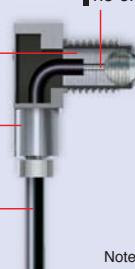

No danger of shorting since no electrical circuits are used.

Note: Equivalent to IP68g of JIS C0920 Annex 1.

Fiber Sensor Features

Selection Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant, Oil-resistant

Bending

Heat-resistant

Area Detection

Liquid-level

Vacuum

FPD, Semi, Solar

Installation Information

Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions

Model Index

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS


Retro-  
reflectiveLimited-  
reflectiveChemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistantArea  
Detection


Liquid-level

Vacuum

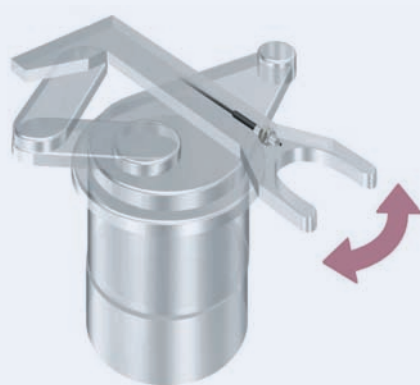FPD,  
Semi,  
Solar

- Capable of withstanding one million repeated bends.

Degree of bend:  $\pm 180^\circ$   
 Bending radius: 4 mm  
 Weight: 50 g  
 Bending rate: 30 times/minute



- A large number of independent fine fibers ensures good flexibility. Suitable for use on moving parts without easily breaking.



- Protective Stainless Spiral Tube is available for covering the fiber cable to protect it from accidental breaking due to snagging or shock.

## Specifications

### Through-beam Fiber Units

Size	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	41 Page Dimensions No.
			E3X-HD		E3NX-FA <b>NEW</b>				
			■GIGA ■HS	Other modes	■GIGA ■HS	Other modes			
1.5 dia.		Bendresistant, R4		ST : 400		ST : 600	0.5 dia. (5 μm dia./ 2 μm dia.)	E32-T22B 2M	41-A
				SHS: 90		SHS: 90			
M3								E32-T21 2M	41-B
M4		Bendresistant, R4		ST : 1,350		ST : 2,020	1 dia. (5 μm dia./ 2 μm dia.)	E32-T11 2M	41-C
				SHS: 360		SHS: 360			
Square		Bendresistant, R4		ST : 300		ST : 450	0.5 dia. (5 μm dia./ 2 μm dia.)	E32-T25XB 2M	41-D
				SHS: 70		SHS: 70			

**Note** The following mode names and response times apply to the modes given in the Sensing distance column.

- [E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250  $\mu$ s), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50  $\mu$ s, PNP output: 55  $\mu$ s)  
 [E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250  $\mu$ s), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30  $\mu$ s)

The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.

- The first value is for the E3X-HD and the second value is for the E3NX-FA.

## Protective Stainless Spiral Tube (Sold separately)

Insert the fiber cable into the protective tube to prevent breaking by snagging or shock.

Applicable Fiber Units	Model	Quantity	41 Page Dimensions No.
E32-T11R 2M/E32-T11 2M/ E32-LT11 2M/E32-LT11R 2M/ E32-T51R 2M/E32-T51 2M	<b>E30-F32C 1M</b>	2 pieces	41-E


\* This Tube cannot be used if a Lens Unit is being used.

## Dimensions


Installation Information → 60, 61 Page

### Through-beam Fiber Units (Set of 2)


**41-A E32-T22B 2M** (Free Cutting)

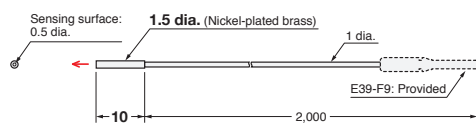


**41-B E32-T21 2M** (Free Cutting)

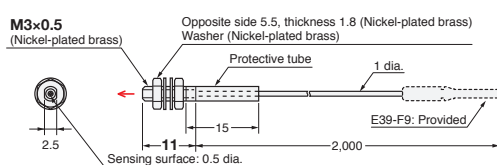

**41-C E32-T11 2M** (Free Cutting)

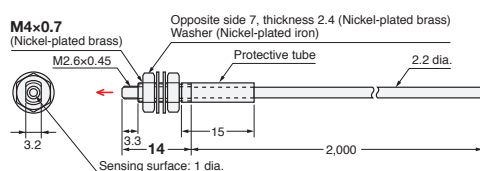


**41-D E32-T25XB 2M** (Free Cutting)

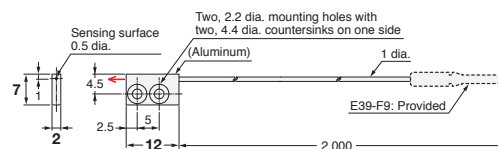

**Note 1:** Set of two symmetrically shaped Fiber Units.  
**Note 2:** Four, M2 x 8 stainless steel countersunk mounting screws are provided.

**41-E E39-F32C 1M**

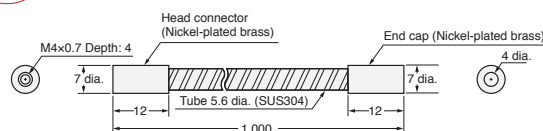

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	
BGS	
Retro-reflective	Transparent Objects
Limited-reflective	
Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	
Area Detection	Applications
Liquid-level	
Vacuum	
FPD, Semi, Solar	
Installation Information	

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS


Retro-  
reflectiveLimited-  
reflectiveChemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistantArea  
Detection


Liquid-level

Vacuum

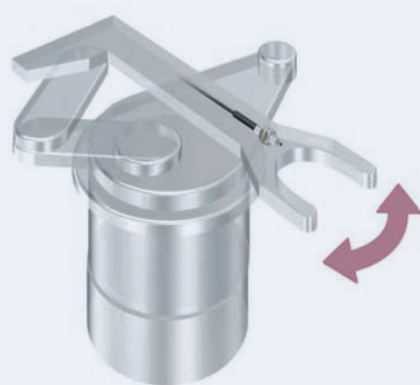FPD,  
Semi,  
Solar

- Capable of withstanding one million repeated bends.

Degree of bend:  $\pm 180^\circ$   
 Bending radius: 4 mm  
 Weight: 50 g  
 Bending rate: 30 times/minute









- A large number of independent fine fibers ensures good flexibility. Suitable for use on moving parts without easily breaking.



- Protective Stainless Spiral Tube is available for covering the fiber cable to protect it from accidental breaking due to snagging or shock.

## Specifications

### Reflective Fiber Units

Size	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	43 Page Dimensions No.
			E3X-HD		E3NX-FA <i>NEW</i>				
			■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
1.5 dia.	 15 1.5 dia. IP67	Bendresistant, R4	■ 140	ST : 60	■ 210	ST : 90	(5 μm dia./ 2 μm dia.)	E32-D22B 2M	43-A
M3	 11 M3 IP67		■ 40	SHS: 16	■ 60	SHS: 16		E32-D21 2M	43-B
3 dia.	 15 3 dia. IP67		■ 300	ST : 140	■ 450	ST : 210		E32-D221B 2M	43-C
M4	 15 M4 IP67		■ 90	SHS: 40	■ 130	SHS: 40		E32-D21B 2M	43-D
M6	 17 M6 IP67		■ 840	ST : 350	■ 1,260	ST : 520		E32-D11 2M	43-E
Square	 12 21 8 IP67		■ 240	ST : 100	■ 360	ST : 150		E32-D25XB 2M	43-F
			■ 60	SHS: 30	■ 90	SHS: 30			

**Note** The following model names and response times apply to the modes given in the Sensing distance column.

1. [E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250  $\mu$ s), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50  $\mu$ s, PNP output: 55  $\mu$ s)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250  $\mu$ s), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30  $\mu$ s)

The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.

2. The first value is for the E3X-HD and the second value is for the E3NX-FA.

The sensing distances for Reflective Fiber Units are for white paper.

## Protective Stainless Spiral Tube (Sold separately)

Insert the fiber cable into the protective tube to prevent breaking by snagging or shock.

Applicable Fiber Units	Models	Quantity	43 Page Dimensions No.
E32-D21R 2M/E32-C31 2M/ E32-D21 2M	E30-F32A 1M	1 piece	43-G
E32-D211R 2M/E32-D21B 2M	E30-F32C 1M	2 pieces	
E32-D11R 2M/E32-CC200 2M/ E32-D11 2M/E32-D51R 2M/ E32-D51 2M	E30-F32D 1M	1 piece	

\* This Tube cannot be used if a Lens Unit is being used.


## Dimensions

Installation Information → 58, 59 and 61 Page




## Limited-reflective Fiber Units


### 43-A E32-D22B 2M (No Cutting)

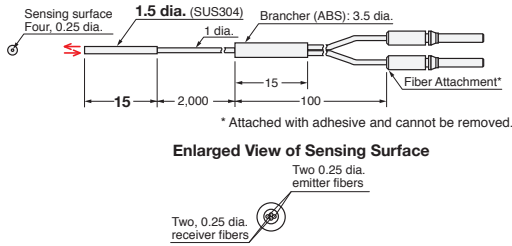


### 43-B E32-D21 2M (Free Cutting)

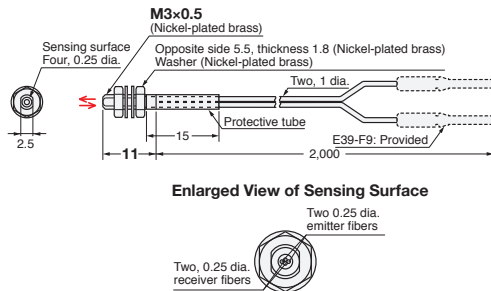


### 43-C E32-D221B 2M (Free Cutting)

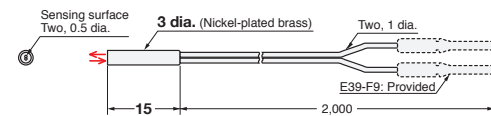


### 43-D E32-D21B 2M (Free Cutting)

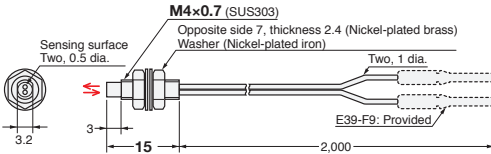


### 43-E E32-D11 2M (Free Cutting)

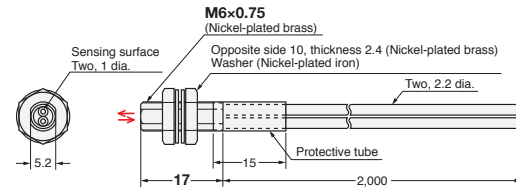

### 43-F E32-D25XB 2M (Free Cutting)

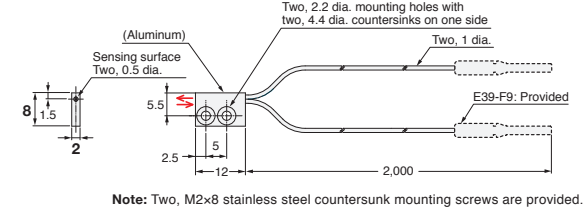

### 43-G E39-F32A 1M/E39-F32C 1M/E39-F32D 1M

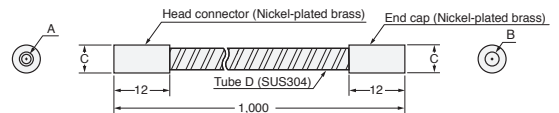

Models	A	B	C	D
E39-F32A 1M	M3x0.5 Depth: 4	3 dia.	6 dia.	(4.6 dia.)
E39-F32C 1M	M4x0.7 Depth: 4	4 dia.	7 dia.	(5.6 dia.)
E39-F32D 1M	M6x0.75 Depth: 4	5 dia.	8.5 dia.	(7 dia.)

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflective

Limited-  
reflective

Chemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistant

Area  
Detection

Liquid-level

Vacuum


FPD,  
Semi,  
Solar

Installation  
Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions




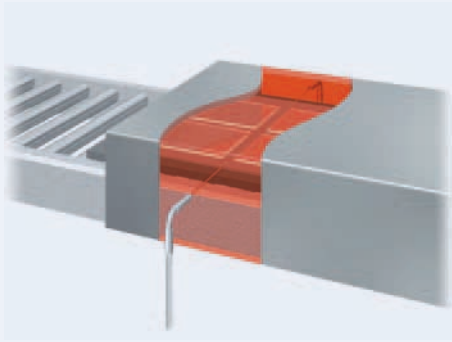
















Model Index



- Wide product variety for temperatures from 100 to 350°C. Select the model according to heat-resistant temperature.

## Specifications

## Through-beam Fiber Units

Heat-resistant temperature	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	45 Page Dimensions No.
			E3X-HD		E3NX-FA <i>NEW</i>				
			■GIGA ■HS	Other modes	■GIGA ■HS	Other modes			
100°C *1		Flexible, R2	 1,600  560	ST : 800 SHS: 225	 2,400  840	ST : 1,200 SHS: 225	1 dia. (0.1 dia./ 0.03 dia.)	E32-T51R 2M	45-A
150°C *2		R35	 2,800  1,000	ST : 1,500 SHS: 400	 4,000*5  1,500	ST : 2,250 SHS: 400	1.5 dia. (0.1 dia./ 0.03 dia.)	E32-T51 2M	45-B
200°C *3		R10	 1,000  360	ST : 550 SHS: 140	 1,500  540	ST : 820 SHS: 140	0.7 dia. (5 µm dia./ 2 µm dia.)	E32-T81R-S 2M	45-C
350°C *4		R25	 1,680  600	ST : 900 SHS: 240	 2,520  900	ST : 1,350 SHS: 240	1 dia. (5 µm dia./ 2 µm dia.)	E32-T61-S 2M	45-D
70°C								Standard Fiber Units can be used.	

\*1 For continuous operation, use the Fiber Unit between -40 to 90°C.

\*2 For continuous operation, use the Fiber Unit between -40 to 130°C.

\*3 The heat-resistant rating is not the same for all parts of the Fiber Unit. Refer to the dimensions diagrams for details.

\*4 The ambient operating temperature for the E32-T61-S 2M is -60 to 350°C.

\*5 The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 µs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 µs, PNP output: 55 µs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 µs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 µs)




**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.

The first value is for the E3X-HD and the second value is for the E3NX-FA.


## Dimensions

Installation Information → 60 Page

### Through-beam Fiber Units (Set of 2)

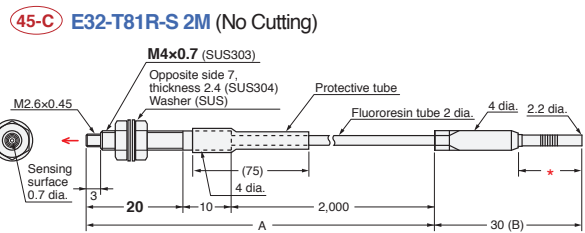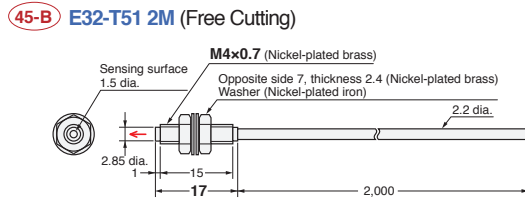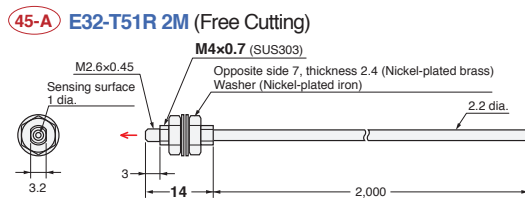

**Note:** The maximum allowable temperatures for sections A and B are 200°C and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by \*) must be maintained within the Amplifier Unit's operating temperature range.

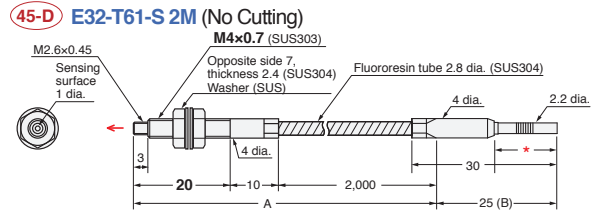

**Note:** The maximum allowable temperatures for sections A and B are 350°C and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by \*) must be maintained within the Amplifier Unit's operating temperature range.

### - Reference Information for Model Selection -

And

### Long-distance Sensing Applications

A separate Lens Unit can be attached to extend the sensing distance.

→ 28 page

Fiber Sensor  
Features

Selection  
Guide


Fiber Units

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	
BGS	
Retro-reflective	Transparent Objects
Limited-reflective	
Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	
Area Detection	Applications
Liquid-level	
Vacuum	
FPD, Semi, Solar	
Installation Information	

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories




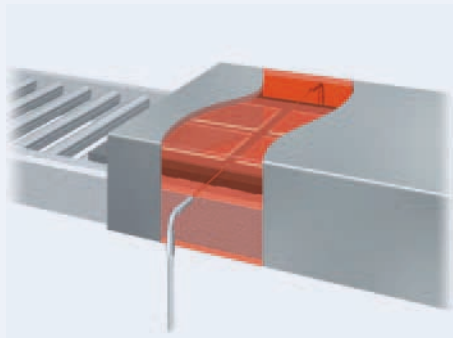












































Technical  
Guide and  
Precautions

Model Index



- Wide product variety for temperatures from 100 to 400°C. Select the model according to heat-resistant temperature.

## Specifications

Reflective Fiber Units									
Heat-resistant temperature	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Standard sensing object (minimum sensing object)	Models	47 Page Dimensions No.
			E3X-HD		E3NX-FA <i>NEW</i>				
			GIGA	HS	Other modes	GIGA			
100°C *1		Flexible, R2	 670  190	ST : 280 SHS: 80	 1,000  280	ST : 420 SHS: 80	(5 μm dia./ 2 μm dia.)	E32-D51R 2M	
150°C *2		R35	 1,120  320	ST : 450 SHS: 144	 1,680  480	ST : 670 SHS: 144		E32-D51 2M	
200°C *3		R10	 420  120	ST : 180 SHS: 54	 630  180	ST : 270 SHS: 54		E32-D61R-S 2M	
300°C		R25	 10 to 20  10 to 20	ST : 10 to 20 SHS: -	 10 to 20  10 to 20	ST : 10 to 20 SHS: -	Soda glass with reflection factor of 7%	E32-A08H2 2M	
			 20 to 30  20 to 30	ST : 20 to 30 SHS: -	 20 to 30  20 to 30	ST : 20 to 30 SHS: -	End surface of soda glass with reflection factor of 7% (t = 0.7 mm, rounded edges)	E32-A09H2 2M	
350°C *3		R25	 420  120	ST : 180 SHS: 54	 630  180	ST : 270 SHS: 54	(5 μm dia./ 2 μm dia.)	E32-D611-S 2M	
			 420  80	ST : 120 SHS: 36	 420  120	ST : 180 SHS: 36		E32-D61-S 2M	
400°C *3			 280  80	ST : 120 SHS: 36	 420  120	ST : 180 SHS: 36		E32-D73-S 2M	
70°C			—					Standard Fiber Units can be used.	—

\*1 For continuous operation, use the Fiber Unit between -40 to 90°C.

\*2 For continuous operation, use the Fiber Unit between -40 to 130°C.

\*3 The heat-resistant rating is not the same for all parts of the Fiber Unit. Refer to the dimensions diagrams for details.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

2. The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.

The first value is for the E3X-HD and the second value is for the E3NX-FA.


3. The sensing distances for Reflective Fiber Units are for white paper.

## Dimensions


Installation Information → 58, 59 Page

### Reflective Fiber Units


**(47-A) E32-D51R 2M (Free Cutting)**

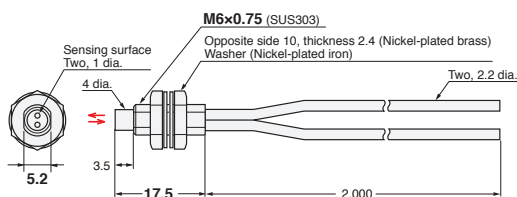

**(47-B) E32-D51 2M (Free Cutting)**

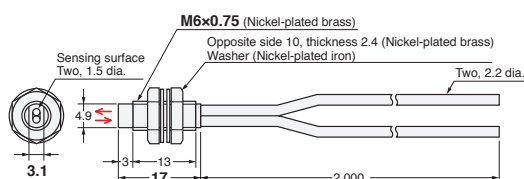


**(47-C) E32-D81R-S 2M (No Cutting)**

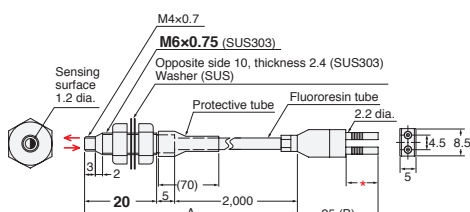

**Note:** The maximum allowable temperatures for sections A and B are 200°C and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by \*) must be maintained within the Amplifier Unit's operating temperature range.


**(47-D) E32-A08H2 2M (No Cutting)**

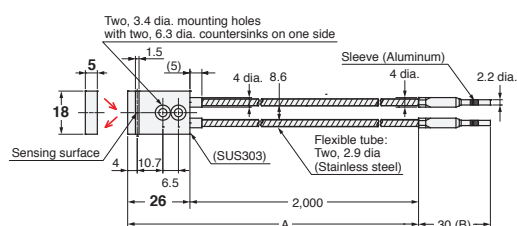

**Note:** The maximum allowable temperatures for sections A and B are 300°C and 110°C, respectively.


Two, M3  
6.5±0.1  
Mounting holes

**(47-E) E32-A09H2 2M (No Cutting)**

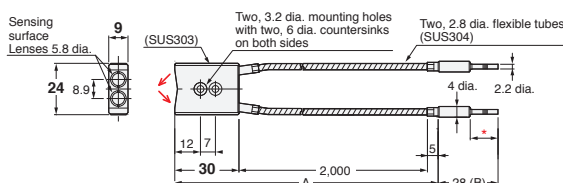


**Note:** The maximum allowable temperatures for sections A and B are 300°C and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by \*) must be maintained within the Amplifier Unit's operating temperature range.

**(47-F) E32-D611-S 2M (No Cutting)**

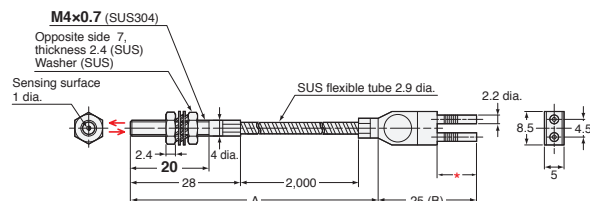

**Note:** The maximum allowable temperatures for sections A and B are 350°C and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by \*) must be maintained within the Amplifier Unit's operating temperature range.


**(47-G) E32-D61-S 2M (No Cutting)**

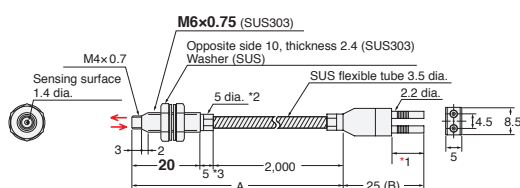

- \*2. The diameter is 6 dia. if the fiber length exceeds 10 m.
- \*3. The length is 10 if the fiber length exceeds 10 m.

**Note:** The maximum allowable temperatures for sections A and B are 350°C and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by \*) must be maintained within the Amplifier Unit's operating temperature range.

**(47-H) E32-D73-S 2M (No Cutting)**

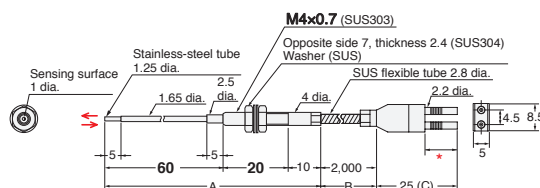

**Note:** The maximum allowable temperatures for sections A, B, and C are 400°C, 300°C, and 110°C, respectively. The section inserted into the Amplifier Unit (indicated by \*) must be maintained within the Amplifier Unit's operating temperature range.

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	Transparent Objects
BGS	
Retro-reflective	Environmental Immunity
Limited-reflective	
Chemical-resistant, Oil-resistant	
Bending	
Heat-resistant	Applications
Area Detection	
Liquid-level	
Vacuum	
FPD, Semi, Solar	
Installation Information	

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant,  
Oil-resistant

Bending

Heat-resistant


Area  
Detection

Liquid-level


Vacuum

FPD,  
Semi,  
Solar

Detection of falling workpieces



Meander detection




Detection of workpieces with holes

- Area beams are optimum for detecting workpieces presented in inconsistent positions, such as falling workpieces, or for meander detection, or for detecting workpieces with holes.

- This Fiber Unit is ideal for meander detection because it outputs the digital value in a linear relation to the interrupted light distance.



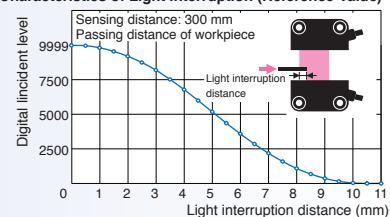















Characteristics of Light Interruption (Reference Value)



E32-T16PR+E3NX-FA21

## Specifications



## Through-beam Fiber Units

Type	Sensing width	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	49 Page Dimensions No.
				E3X-HD		E3NX-FA <b>NEW</b>				
				■GIGA ■HS	Other modes	■GIGA ■HS	Other modes			
Area	11 mm		Flexible, R1	 3,100	ST : 1,700	 4,000 *1	ST : 2,550	<b>E32-T16PR 2M</b>		
		 1,120		SHS: 440	 1,680	SHS: 440				
		 2,750		ST : 1,500	 4,000 *1	ST : 2,250	<b>E32-T16JR 2M</b>			
		 960		SHS: 380	 1,440	SHS: 380				
	30 mm			 4,000 *1	ST : 2,600	 4,000 *1	ST : 3,900	<b>E32-T16WR 2M</b>		
		 1,700		SHS: 680	 2,550	SHS: 680				

\*1 The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

\*2 The values for the minimum sensing object were obtained for detection in the sensing area with the sensing distance set to 300 mm.  
(The values are for a stationary sensing object.)  
The first value is for the E3X-HD and the second value is for the E3NX-FA.

## Reflective Fiber Units

Type	Sensing width	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Model	49 Page Dimensions No.
				E3X-HD		E3NX-FA <i>NEW</i>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Array	11 mm	 <small>ID67</small>	Bend-resistant, R4	■ 700 ■ 200	ST : 300 SHS: 90	■ 1,050 ■ 300	ST : 450 SHS: 90	(5 μm dia./ 2 μm dia.)	E32-D36P1 2M	

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)  
[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)


**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.  
The first value is for the E3X-HD and the second value is for the E3NX-FA.

Dimensions


Installation Information → 60 Page

Through-beam Fiber Units (Set of 2)


49-A E32-T16PR 2M (Free Cutting)

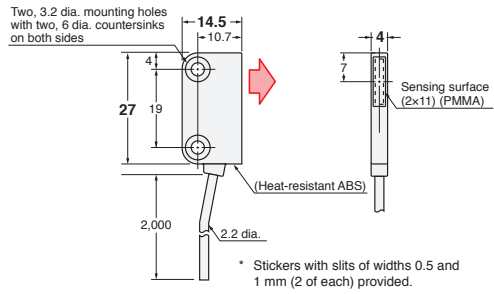

49-B E32-T16JR 2M (Free Cutting)

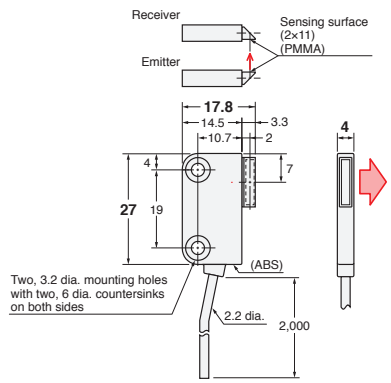


49-C E32-T16WR 2M (Free Cutting)

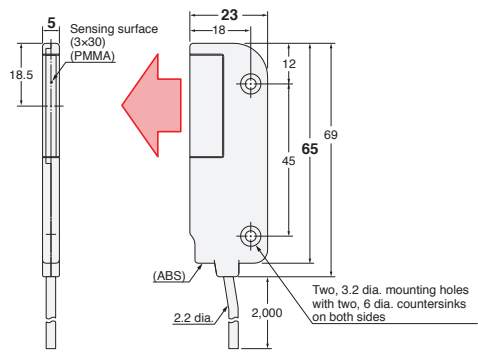

Installation Information → 59 Page

Through-beam Fiber Units (Set of 2)

49-D E32-D36P1 2M (Free Cutting)

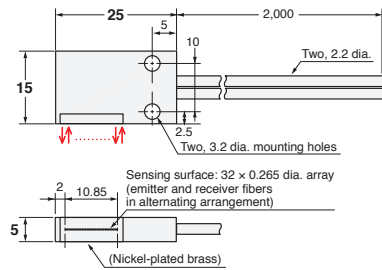

Fiber Sensor Features

Selection Guide

Fiber Units

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	
BGS	Transparent Objects
Retro-reflective	
Limited-reflective	
Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	
Area Detection	Applications
Liquid-level	
Vacuum	
FPD, Semi, Solar	Installation Information

Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions

Model Index



- Fiber Units for detecting liquid levels are available in two types: for tube mounting and liquid contact.


### ▶ Tube-mounting Types

Detect the liquid level inside transparent tubes. Strap the Fiber Unit to a tube with band.



### ▶ Liquid-contact Type

Detect the liquid level by direct contact with the liquid. This model has excellent chemical-resistance because the Fiber Unit is covered in fluororesin.

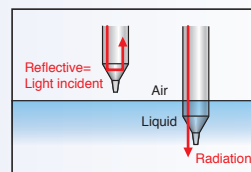

## Specifications

Detection scheme	Tube diameter	Features	Appearance (mm)	Bending radius of cable	Applicable range	Optical axis diameter (minimum sensing object)	Models	51 Page Dimensions No.
Tube-mounting	3.2, 6.4 and 9.5 dia.	<ul style="list-style-type: none"> <li>Resistant to bubbles and droplets</li> <li>Residual quantity detection</li> </ul>		Bend-resistant, R4	Applicable tube: Transparent tube with a diameter of 3.2, 6.4, or 9.5 dia. and a recommended wall thickness of 1 mm	—	<b>E32-A01 5M</b>	<b>51-A</b>
	8 to 10 dia.	Ideal for mounting at multilevels		R10	Applicable tube: Transparent tube with a diameter of 8 to 10 dia. and a recommended wall thickness of 1 mm	—	<b>E32-L25T 2M</b>	<b>51-B</b>
	No restrictions	<ul style="list-style-type: none"> <li>Usable on large diameter tubes</li> <li>Resistant to bubbles and droplets</li> </ul>		R4	Applicable tube: Transparent tube (no restrictions on diameter)	—	<b>E32-D36T 2M</b>	<b>51-C</b>
Liquid contact (heat-resistant up to 200°C)	—	—		R40 R25 *3	Liquid-contact Type *1	—	<b>E32-D82F1 4M</b>	<b>51-D</b>

\*1 If the incident light level is too high, perform power tuning or use the ECO mode to decrease the incident level.

\*2 The applicable range is the same whether an E3X-HD series or E3NX-FA series is used.

When using a Fiber Amplifier Unit in giga-power mode, level detection may not work depending on the tube diameter. Make sure to confirm operation with the actual tube.

\*3 The bending radius of the sensing section (except for the unbendable section) is 40 mm, and the bending radius of the fiber is 25 mm.

## - Reference Information for Model Selection -


### Determining the Best Model for Tube-mounted Types

Mounting and conditions	Recommended Unit	Features
When bubbles and the water droplets are generated	<b>E32-A01</b>	<p>This is a Through-beam Model, so the incident light will differ greatly between with and without of liquid. It also uses an area beam, which is less prone to false detection by bubbles and droplets.</p> <div> <div> <p>With liquid</p> <p>Light interrupted</p> </div> <div> <p>Without liquid</p> <p>Light incident</p> </div> </div>
Multilevel installation in limited space	<b>E32-L25T</b>	<p>This model is suitable for mounting at multilevels because of the thin type (height: 10 mm).</p>
Mounting on large diameter tubes	<b>E32-D36T</b>	<p>This model has no restrictions on the tube diameter, so it can be mounted on many different tube sizes. It also uses an area beam, which is less prone to false detection by bubbles and droplets.</p> <div> <div> <p>With liquid</p> <p>Air</p> <p>Tube</p> <p>Reflective= Light incident</p> </div> <div> <p>Without liquid</p> <p>Liquid</p> <p>Radiation</p> </div> </div>


## Dimensions

Installation Information → 58, 59 Page


### 51-A E32-A01 5M (Free Cutting)

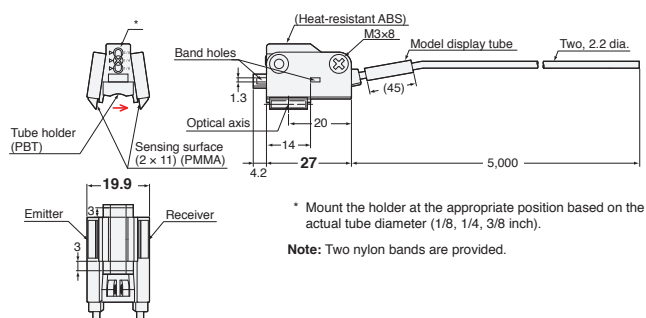


### 51-B E32-L25T 2M (Free Cutting)

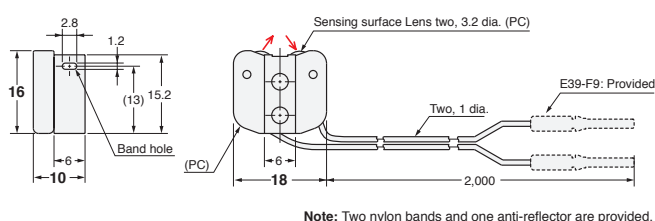

### 51-C E32-D36T 2M (Free Cutting)

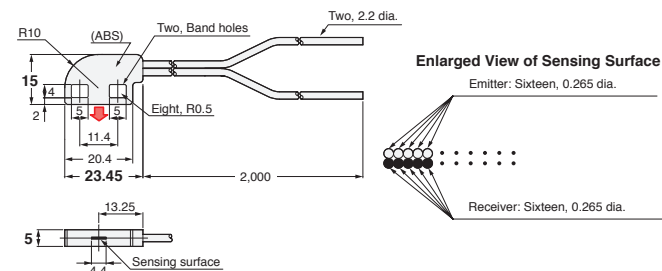

### 51-D E32-D82F1 4M (Free Cutting)

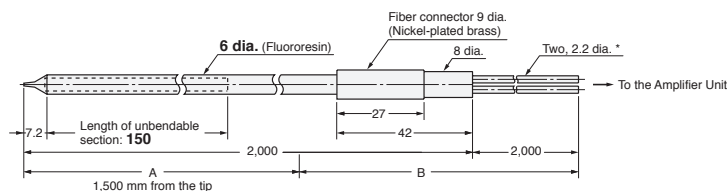

And

### Designed for Safe Residual quantity detection (E32-A01 only)

The E32-A01 Fiber Unit is designed to default to the same output as for liquid absent in the event of a failure, such as when the fiber breaks. This makes it suitable for residual quantity detection.

Trouble (disconnection)	Light interrupted
With liquid	Light interrupted
Without liquid	Light incident

If the failure goes unnoticed, this failsafe design will prevent false detection of liquid when there is no liquid present.

### Tube-mounting Examples



Fiber Sensor Features

Selection Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant, Oil-resistant

Bending

Heat-resistant

Area Detection

Liquid-level

Vacuum

FPD, Semi, Solar

Installation Information

Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions

Model Index

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant,  
Oil-resistant

Bending

Heat-resistant

Area Detection


Liquid-level

Vacuum

FPD,  
Semi,  
Solar






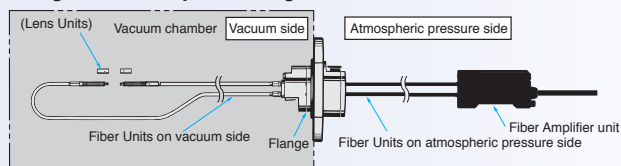














- Can be used under high vacuums of up to  $10^{-5}$  Pa.
- Available in models with heat resistant up to 120 or 200°C.

## Configuration Example for using under vacuum



## Specifications

## Through-beam Fiber Units

Type	Heat-resistant temperature	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	53 Page Dimensions No.
				E3X-HD		E3NX-FA <b>NEW</b>				
				■GIGA ■HS	Other modes	■GIGA ■HS	Other modes			
Vacuum side	120°C		R30	 720	ST : 400	 1,080	ST : 600	1.2 dia. (10 μm dia./ 4 μm dia.)	<b>E32-T51V 1M</b>	
		 260		SHS: 100	 390	SHS: 100				
		 2,000*	ST : 2,000	 2,000*	ST : 2,000	4 dia. (0.1 dia./ 0.03 dia.)	<b>E32-T51V 1M + E39-F1V</b>			
	 1,360	SHS: 520	 2,000*	SHS: 520						
200°C		R25	 1,760	ST : 950	 2,000*	ST : 1,420	2 dia. (0.1 dia./ 0.03 dia.)	<b>E32-T84SV 1M</b>		
	 640		SHS: 260	 960	SHS: 260					
Atmospheric pressure side	70°C			—	ST : — SHS: —	—	ST : — SHS: —	—	<b>E32-T10V 2M</b>	

\* The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.

## Flange


Appearance	Type	Models	53 Page Dimensions No.
	4-channel flange	<b>E32-VF4</b>	<b>53-E</b>
	1-channel flange	<b>E32-VF1</b>	<b>53-F</b>

### Dimensions


Installation Information → 60, 61 Page

#### Through-beam Fiber Units (Set of 2)


##### 53-A E32-T51V 1M (No Cutting)

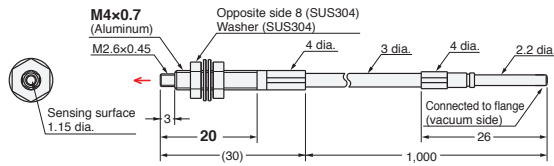


##### 53-B E32-T51V 1M (No Cutting) + E39-F1V

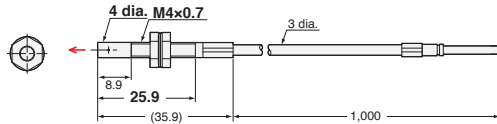


##### E39-F1V




##### 53-C E32-T84SV 1M (No Cutting)

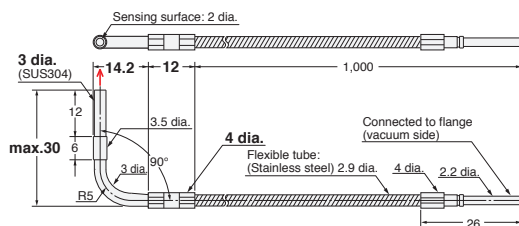

##### 53-D E32-T10V 2M (Free Cutting)




##### 53-E E32-VF4

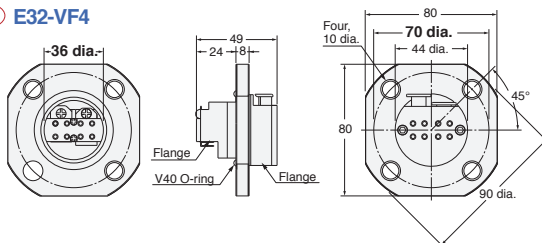

- Note 1.** Mount the Flange so that the V40 O-ring is on the atmospheric-pressure side of the vacuum chamber wall.  
**Note 2.** Mounting-hole dimensions: 38 dia.  $\pm 0.5$  mm  
**Note 3.** The maximum tightening torque is 9.8 N·m.  
**Note 4.** A V40 O-ring is provided.

##### 53-F E32-VF1

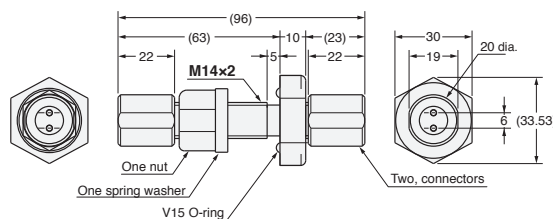


- Note 1.** Mount the Flange so that the V15 O-ring is on the atmospheric-pressure side of the vacuum chamber wall.  
**Note 2.** Mounting-hole dimensions: 14.5 dia.  $\pm 0.2$  mm  
**Note 3.** The maximum tightening torque is 14.7 N·m for the clamp nut and 1.5 N·m for the connector.  
**Note 4.** A V15 O-ring, nut, spring washer, two connectors, and four O-rings for the fibers are provided.

### - Reference Information for Model Selection -

#### What Is a Vacuum-resistant Fiber Unit?

- The Flange is designed to create an air-tight seal on the vacuum side.
  - The fibers and Flange on the vacuum side are made of non-outgassing materials.
- These parts are inspected, cleaned, and sealed in an air-tight package in a clean room prior to shipment.

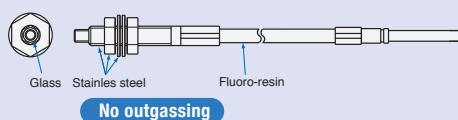

Fiber Sensor Features

Selection Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant, Oil-resistant

Bending

Heat-resistant

Area Detection

Liquid-level

Vacuum


FPD, Semi, Solar

Installation Information

Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions

Model Index



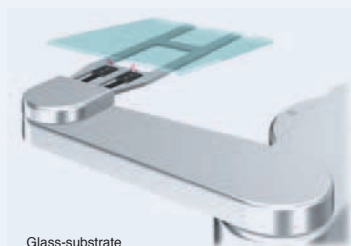
Glass-substrate  
Alignment

### Glass-substrate Alignment

- Detection position accuracy: 0.2 mm max.  
No variation in detection positions even if the sensing distance changes.
- Tilting workpiece does not affect detection.



### Glass-substrate Mapping

Stable detection is possible even for difficult-to-detect curved surfaces.

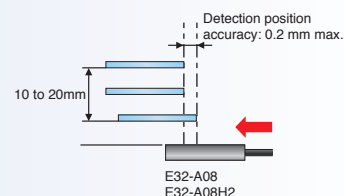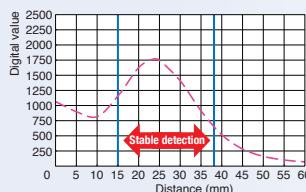









### Glass Presence Detection in Wet Processes

- Stable non-contact detection even with warped glass.
- The spherical heads ensure stable detection without being influenced by liquid.



## Specifications

### Limited-reflective Fiber Units

Application	Ambient temperature	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Standard sensing object (minimum sensing object)	Models	55 Page Dimensions No.
				E3X-HD		E3NX-FA <i>NEW</i>				
				■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Glass presence detection	70℃		R25	■ 0 to 15 ■ 0 to 15	ST : 0 to 15 SHS: 0 to 12	■ 0 to 15 ■ 0 to 15	ST : 0 to 15 SHS: 0 to 12	Soda glass with reflection factor of 7%	E32-L16-N 2M*1	55-A
				■ 10 to 20 ■ 10 to 20	ST : 10 to 20 SHS: -	■ 10 to 20 ■ 10 to 20	ST : 10 to 20 SHS: -		E32-A08 2M*1	55-B
Glass-substrate Alignment	300℃			■ 10 to 20 ■ 10 to 20	ST : 10 to 20 SHS: -	■ 10 to 20 ■ 10 to 20	ST : 10 to 20 SHS: -		E32-A08H2 2M*1	55-C
	70℃			■ 12 to 30 ■ 12 to 30	ST : 12 to 30 SHS: -	■ 12 to 30 ■ 12 to 30	ST : 12 to 30 SHS: -		E32-A12 2M	55-D
Mapping of glass substrates	70℃			■ 15 to 38 ■ 15 to 38 (Center 25)	ST : 15 to 38 SHS: - (Center 25)	■ 15 to 38 ■ 15 to 38 (Center 25)	ST : 15 to 38 SHS: - (Center 25)	End surface of soda glass with reflection factor of 7% (t = 0.7 mm, rounded edges)	E32-A09 2M	55-E
	300℃*2			■ 20 to 30 ■ 20 to 30 (Center 25)	ST : 20 to 30 SHS: - (Center 25)	■ 20 to 30 ■ 20 to 30 (Center 25)	ST : 20 to 30 SHS: - (Center 25)		E32-A09H2 2M	55-F
Wet processes (Cleaning, Resist developing, and etching)	60℃		R40	8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm) 19 to 31 mm from center of mounting hole A (Recommended sensing distance: 22 mm)				Glass (t=0.7mm)	E32-L11FP 2M	55-G
Wet processes (Resist stripping)	85℃			8 to 20 mm from tip of lens (Recommended sensing distance: 11 mm) 32 to 44 mm from center of mounting hole A (Recommended sensing distance: 35 mm)					E32-L11FS 2M	55-H

<sup>\*1</sup> If operation is affected by the background, perform power tuning to decrease the incident light level.


<sup>\*2</sup> The maximum allowable temperature is not the same for all parts of the Fiber Unit. Refer to the dimensions diagrams for details.  
Must not be repeatedly subject to rapid temperature changes.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)


[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

Installation Information → 58, 59 Page

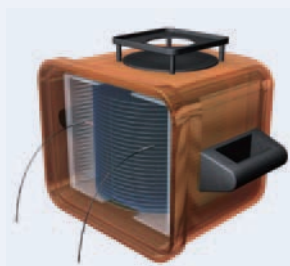

Wafer Mapping




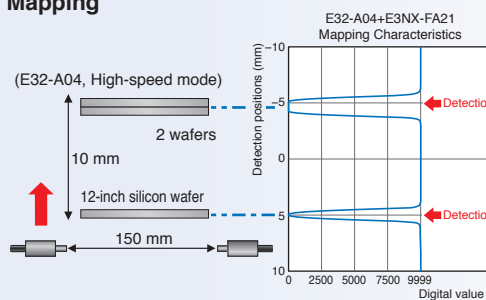




















## • Wafer Mapping



- ▶ Thin-profile design enables easy mounting on robot arms.
- ▶ Easy to adjust optical axis.  
(Typical alignment error between mechanical and optical axes is only  $\pm 0.1^\circ$ .)
- ▶ Reliably wafer detection, even when stacked closely together.

## Specifications

## Through-beam Fiber Units

Application	Ambient temperature	Aperture angle	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	57 Page Dimensions No.
					E3X-HD		E3NX-FA <i>NEW</i>				
					■ GIGA ■ HS	Other modes	■ GIGA ■ HS	Other modes			
Wafer Mapping	70°C	1.5°		Flexible, R1		ST : 1,780		ST : 2,670	2 dia. (0.1 dia./0.03 dia.)	E32-A03 2M	
					SHS: 500		SHS: 500	E32-A03-1 2M			
		3.4°		R10		ST : 680		ST : 1,020	1.2 dia. (0.1 dia./0.03 dia.)	E32-A04 2M	
					SHS: 200		SHS: 200				
		4°		Flexible, R1		ST : 2,200		ST : 3,300	2 dia. (0.1 dia./0.03 dia.)	E32-T24SR 2M	
						SHS: 580		SHS: 580			
		R10		ST : 2,600		ST : 3,900	E32-T24S 2M				
				SHS: 700		SHS: 700					

\* The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

**Note 1.** The following mode names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GiGA: Giga-power mode (16 ms), HS: High-speed mode (250  $\mu$ s), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50  $\mu$ s, PNP output: 55  $\mu$ s)

[E3NX-FA] GiGA: Giga-power mode (16 ms), HS: High-speed mode (250  $\mu$ s), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30  $\mu$ s)

**2.** The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values.


The first value is for the E3X-HD and the second value is for the E3NX-FA.

### Dimensions

Installation Information → 58, 60 Page


#### Through-beam Fiber Units (Set of 2)

##### 57-A E32-A03 2M (Free Cutting)

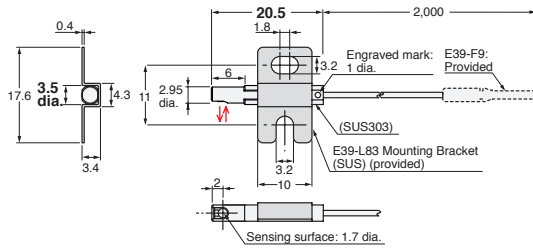


**Note:** Use the engraved surface and its opposing surface as installation (reference) surfaces.

##### 57-B E32-A03-1 2M (Free Cutting)

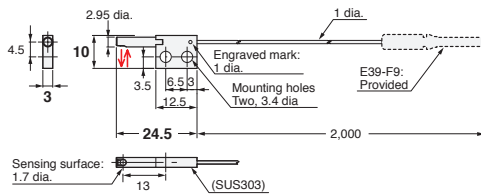


**Note1:** Use the engraved surface and its opposing surface as installation (reference) surfaces.  
**2:** Set of two symmetrical parts.

##### 57-C E32-A04 2M (Free Cutting)

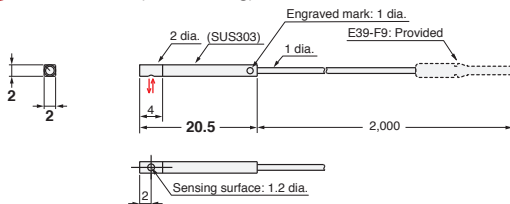


**Note:** Use the engraved surface and its opposing surface as installation (reference) surfaces.

##### 57-D E32-T24SR 2M (Free Cutting)

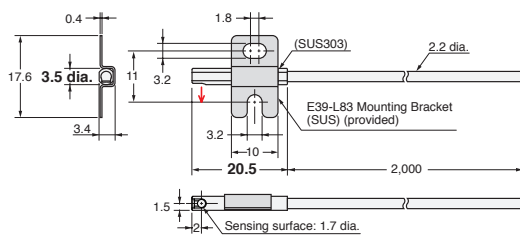

##### 57-E E32-T24S 2M (Free Cutting)

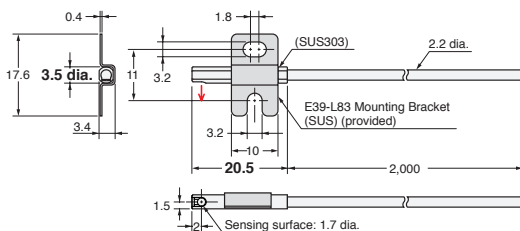

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflective

Limited-  
reflective

Chemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistant

Area  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

Installation  
Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant,  
Oil-resistant

Bending

Heat-resistant

Area Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

Models	Installation			Cable						Weight (packed state) (g)	Dimensions Page No.
	Ambient temperature	Tightening torque	Mounting hole	Bending radius	Unbendable length*1	Tensile strength	Sheath material	Core material	Emitter/receiver differentiation		
E32-A01 5M	−40 to 70°C	0.03N · m	–	R4	10	9.8N	Fluororesin	Plastic	None	200	51 Page <a href="#">(51-A)</a>
E32-A03 2M	−40 to 70°C	0.29N · m	–	R1	0	9.8N	Polyethylene	Plastic	None	40	31 Page <a href="#">(31-A)</a> 57 Page <a href="#">(57-A)</a>
E32-A03-1 2M	−40 to 70°C	0.29N · m	–	R10	10	9.8N	Polyethylene	Plastic	None	50	31 Page <a href="#">(31-B)</a> 57 Page <a href="#">(57-B)</a>
E32-A04 2M	−40 to 70°C	0.29N · m	2.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Polyethylene	Plastic	None	40	31 Page <a href="#">(31-C)</a> 57 Page <a href="#">(57-C)</a>
E32-A08 2M	−40 to 70°C	0.53N · m	–	R25	10	9.8N	Polyethylene	Plastic	None	60	37 Page <a href="#">(37-C)</a> 55 Page <a href="#">(55-B)</a>
E32-A08H2 2M	−40 to 300°C *2	0.53N · m	–	R25	10	29.4N	SUS	Glass	None	240	47 Page <a href="#">(47-D)</a> 55 Page <a href="#">(55-C)</a>
E32-A09 2M	−40 to 70°C	0.53N · m	–	R25	10	9.8N	Polyethylene	Plastic	None	60	37 Page <a href="#">(37-F)</a> 55 Page <a href="#">(55-E)</a>
E32-A09H2 2M	−40 to 300°C *2, *3	0.53N · m	–	R25	10	9.8N	SUS	Glass	None	230	47 Page <a href="#">(47-E)</a> 55 Page <a href="#">(55-F)</a>
E32-A12 2M	−40 to 70°C	0.53N · m	–	R25	10	9.8N	Polyethylene	Plastic	None	60	37 Page <a href="#">(37-D)</a> 55 Page <a href="#">(55-D)</a>
E32-C11N 2M	−40 to 70°C	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	0	29.4N	PVC and Polyethylene	Plastic	White line on emitter cable	70	09 Page <a href="#">(09-B)</a>
E32-C21N 2M	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R2	0	9.8N	Polyethylene	Plastic	White line on emitter cable	30	97 Page <a href="#">(97-D)</a>
E32-C31 2M	−40 to 70°C	0.78N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	9.8N	Polyethylene	Plastic	White line on emitter cable	40	09 Page <a href="#">(09-D)</a>
E32-C31M 1M	−40 to 70°C	0.78N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Polyethylene	Plastic	White line on emitter cable	40	09 Page <a href="#">(09-E)</a>
E32-C31N 2M	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	0	9.8N	PVC and Polyethylene	Plastic	White line on emitter cable	40	09 Page <a href="#">(09-A)</a>
E32-C41 1M	−40 to 70°C	0.78N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	9.8N	Polyethylene	Plastic	White tube on emitter cable	30	23 Page <a href="#">(23-A)</a> , <a href="#">(23-D)</a>
E32-C42 1M	−40 to 70°C	0.29N · m	2.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	9.8N	Polyethylene	Plastic	White tube on emitter cable	30	21 Page <a href="#">(21-A)</a> , <a href="#">(21-B)</a>
E32-C42S 1M	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	4N	Polyolefin	Plastic	White tube on emitter cable	30	21 Page <a href="#">(21-E)</a>
E32-CC200 2M	−40 to 70°C	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	29.4N	Polyethylene	Plastic	White line on emitter cable	40	09 Page <a href="#">(09-H)</a>
E32-D11 2M	−40 to 70°C	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	29.4N	PVC	Plastic	None	50	43 Page <a href="#">(43-E)</a>
E32-D11R 2M	−40 to 70°C	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	29.4N	PVC	Plastic	None	50	09 Page <a href="#">(09-G)</a>
E32-D11U 2M	−40 to 70°C	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	29.4N	Fluororesin	Plastic	None	60	39 Page <a href="#">(39-I)</a>
E32-D12F 2M	−40 to 70°C	0.78N · m	6.5 <sup>+0.5</sup> <sub>0</sub> dia.	R40	10	29.4N	Fluororesin	Plastic	None	190	39 Page <a href="#">(39-H)</a>
E32-D15XR 2M	−40 to 70°C	0.15N · m	–	R1	0	29.4N	PVC	Plastic	None	60	15 Page <a href="#">(15-D)</a>
E32-D15YR 2M	−40 to 70°C	0.15N · m	–	R1	0	29.4N	PVC	Plastic	None	60	15 Page <a href="#">(15-E)</a>
E32-D15ZR 2M	−40 to 70°C	0.15N · m	–	R1	0	29.4N	PVC	Plastic	None	60	15 Page <a href="#">(15-F)</a>
E32-D16 2M	−40 to 70°C	0.53N · m	–	R4	10	29.4N	PVC	Plastic	None	70	25 Page <a href="#">(25-E)</a>
E32-D21 2M	−40 to 70°C	0.78N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	PVC	Plastic	None	20	43 Page <a href="#">(43-B)</a>
E32-D211R 2M	−40 to 70°C	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	9.8N	Polyethylene	Plastic	None	40	09 Page <a href="#">(09-F)</a>
E32-D21B 2M	−40 to 70°C	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	PVC	Plastic	None	40	43 Page <a href="#">(43-D)</a>
E32-D21N 2M	−40 to 70°C	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R2	0	9.8N	Polyethylene	Plastic	None	30	97 Page <a href="#">(97-E)</a>
E32-D21R 2M	−40 to 70°C	0.78N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	9.8N	Polyethylene	Plastic	None	20	09 Page <a href="#">(09-C)</a>
E32-D21-S3 2M	−40 to 70°C	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Polyethylene	Plastic	None	50	19 Page <a href="#">(19-J)</a>
E32-D221B 2M	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	PVC	Plastic	None	40	13 Page <a href="#">(13-D)</a> 43 Page <a href="#">(43-C)</a>
E32-D22B 2M	−40 to 70°C	0.2N · m	1.7 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	PVC	Plastic	None	30	13 Page <a href="#">(13-A)</a> 43 Page <a href="#">(43-A)</a>

\*1 Unbendable length of cable from fiber head.  
Do not bend the cable for at least 20 mm from where the cable inserts into the Fiber Amplifier Unit.  
\*2 The heat-resistant rating is not the same for all parts of the Fiber Unit. Refer to the dimensions diagrams for details.  
\*3 Avoid rapid temperature changes.

Models	Installation			Cable						Weight (packed state) (g)	Dimensions Page No.
	Ambient temperature	Tightening torque	Mounting hole	Bending radius	Unbendable length*1	Tensile strength	Sheath material	Core material	Emitter/receiver differentiation		
<b>E32-D22R 2M</b>	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	9.8N	Polyethylene	Plastic	None	40	13 Page (13-C)
<b>E32-D22-S1 2M</b>	−40 to 70°C	0.29N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Polyethylene	Plastic	None	45	19 Page (19-I)
<b>E32-D24R 2M</b>	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	9.8N	Polyethylene	Plastic	None	40	19 Page (19-A)
<b>E32-D24-S2 2M</b>	−40 to 70°C	0.29N · m	5 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	19.6N	Polyethylene	Plastic	None	55	19 Page (19-B)
<b>E32-D25XB 2M</b>	−40 to 70°C	0.15N · m	—	R4	10	9.8N	PVC	Plastic	None	40	43 Page (43-F)
<b>E32-D25-S3 2M</b>	−40 to 70°C	0.29N · m	—	R10	10	9.8N	Polyethylene	Plastic	None	50	19 Page (19-L)
<b>E32-D31-S1 0.5M</b>	−40 to 70°C	0.78N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	Polyolefin	Plastic	None	35	19 Page (19-G)
<b>E32-D32L 2M</b>	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	29.4N	Polyethylene	Plastic	Yellow dotted line on emitter cable	50	13 Page (13-E)
<b>E32-D32-S1 0.5M</b>	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	Polyolefin	Plastic	None	35	19 Page (19-F)
<b>E32-D33 2M</b>	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	9.8N	Polyethylene	Plastic	None	40	13 Page (13-F) 19 Page (19-E)
<b>E32-D331 2M</b>	−40 to 70°C	0.29N · m	2.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	Polyethylene	Plastic	None	30	19 Page (19-D)
<b>E32-D36P1 2M</b>	−40 to 70°C	0.78N · m	—	R4	10	29.4N	Polyethylene	Plastic	None	60	49 Page (49-D)
<b>E32-D36T 2M</b>	−40 to 70°C	—	—	R4	10	29.4N	Polyethylene	Plastic	None	190	51 Page (51-C)
<b>E32-D43M 1M</b>	−40 to 70°C	0.29N · m	1.7 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	Polyethylene	Plastic	None	30	13 Page (13-B) 19 Page (19-C)
<b>E32-D51 2M</b>	−40 to 150°C *2	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R35	10	29.4N	Fluororesin	Plastic	None	60	47 Page (47-B)
<b>E32-D51R 2M</b>	−40 to 100°C *3	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R2	0	29.4N	Polyurethane	Plastic	None	60	47 Page (47-A)
<b>E32-D61-S 2M</b>	−60 to 350°C *4	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	29.4N	SUS	Glass	None	190	47 Page (47-G)
<b>E32-D611-S 2M</b>	−60 to 350°C *4	0.98N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	29.4N	SUS	Glass	None	170	47 Page (47-F)
<b>E32-D73-S 2M</b>	−40 to 400°C *4	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	29.4N	SUS	Glass	None	170	47 Page (47-H)
<b>E32-D81R-S 2M</b>	−40 to 200°C *4	0.78N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Fluororesin	Glass	None	70	47 Page (47-C)
<b>E32-D82F1 4M</b>	−40 to 200°C	0.29N · m	6.5 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	29.4N	Fluororesin	Plastic	None	450	51 Page (51-D)
<b>E32-DC200BR 2M</b>	−40 to 70°C	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	29.4N	PVC	Plastic	None	60	19 Page (19-K)
<b>E32-DC200F4R 2M</b>	−40 to 70°C	0.78N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	9.8N	Polyethylene	Plastic	None	40	19 Page (19-H)
<b>E32-L11FP 2M</b>	−10 to 60°C	0.78N · m	—	R40	10	9.8N	Fluororesin	Plastic	None	310	39 Page (39-F) 55 Page (55-G)
<b>E32-L11FS 2M</b>	−10 to 85°C	0.78N · m	—	R40	10	9.8N	Fluororesin	Plastic	None	310	39 Page (39-G) 55 Page (55-H)
<b>E32-L15 2M</b>	−40 to 70°C	0.53N · m	—	R25	10	29.4N	Polyethylene	Plastic	White tube on emitter cable	60	21 Page (21-F)
<b>E32-L16-N 2M</b>	−40 to 70°C	0.29N · m	—	R25	10	29.4N	Polyethylene	Plastic	None	60	33 Page (33-A) 37 Page (37-B) 55 Page (55-A)
<b>E32-L24S 2M</b>	−40 to 70°C	0.29N · m	—	R10	10	9.8N	Polyethylene	Plastic	None	40	33 Page (33-B) 37 Page (37-A)
<b>E32-L25L 2M</b>	−40 to 105°C *3	0.29N · m	—	R10	10	9.8N	Polyethylene	Plastic	None	40	33 Page (33-C) 37 Page (37-E)
<b>E32-L25T 2M</b>	−40 to 70°C	—	—	R10	10	9.8N	Polyethylene	Plastic	None	40	51 Page (51-B)
<b>E32-LD11 2M</b>	−40 to 70°C	0.98N · m	—	R25	10	29.4N	Polyethylene	Plastic	None	40	09 Page (09-I)
<b>E32-LD11N 2M</b>	−40 to 70°C	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R2	0	29.4N	Polyethylene	Plastic	None	40	97 Page (97-C)
<b>E32-LD11R 2M</b>	−40 to 70°C	0.98N · m	—	R1	0	29.4N	Polyethylene	Plastic	None	40	09 Page (09-I)

\*1 Unbendable length of cable from fiber head.

Do not bend the cable for at least 20 mm from where the cable inserts into the Fiber Amplifier Unit.

\*2 For continuous operation, use the Fiber Unit between −40 to 130°C.

\*3 For continuous operation, use the Fiber Unit between −40 to 90°C.

\*4 The heat-resistant rating is not the same for all parts of the Fiber Unit. Refer to the dimensions diagrams for details.

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	
BGS	Transparent Objects
Retro-reflective	
Limited-reflective	
Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	
Area Detection	Applications
Liquid-level	
Vacuum	
FPD, Semi, Solar	Fiber Amplifiers, Communications Unit, and Accessories
Installation Information	

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflective

Limited-  
reflective

Chemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistant

Area  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

Models	Installation			Cable						Weight (packed state) (g)	Dimensions Page No.
	Ambient temperature	Tightening torque	Mounting hole	Bending radius	Unbendable length*1	Tensile strength	Sheath material	Core material	Emitter/receiver differentiation		
E32-LR11NP 2M	−40 to 70°C *2	0.98N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R2	0	29.4N	Polyethylene	Plastic	None	40	35 Page (35-A) 97 Page (97-G)
E32-LT11 2M	−40 to 70°C	0.78N · m	–	R25	10	29.4N	Polyethylene	Plastic	None	40	07 Page (07-C) 25 Page (25-C)
E32-LT11N 2M	−40 to 70°C	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R2	0	29.4N	Polyethylene	Plastic	None	40	25 Page (25-A) 97 Page (97-A)
E32-LT11R 2M	−40 to 70°C	0.78N · m	–	R1	0	29.4N	Polyethylene	Plastic	None	40	07 Page (07-C) 25 Page (25-C)
E32-R16 2M	−25 to 55°C	0.54N · m	–	R25	10	29.4N	Polyethylene	Plastic	None	220 (E39-R1 included.)	35 Page (35-B)
E32-R21 2M	−40 to 70°C	0.39N · m	6.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Polyethylene	Plastic	None	70 (E39-R3 included.)	35 Page (35-C)
E32-T10V 2M	−25 to 70°C	0.3N · m	–	R25	10	29.4N	Fluororesin	Plastic	None	170	53 Page (53-D)
E32-T11 2M	−40 to 70°C	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	29.4N	PVC	Plastic	None	40	41 Page (41-C)
E32-T11F 2M	−40 to 70°C	0.29N · m	–	R4	10	29.4N	Fluororesin	Plastic	None	60	39 Page (39-C)
E32-T11N 2M	−40 to 70°C	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	29.4N	PVC	Plastic	None	70	07 Page (07-A)
E32-T11NF 2M	−25 to 70°C	12N · m	8.5 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	29.4N	Fluororesin	Plastic	None	80	39 Page (39-A)
E32-T11R 2M	−40 to 70°C	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	29.4N	PVC	Plastic	None	50	07 Page (07-B)
E32-T12F 2M	−40 to 70°C	0.78N · m	5.5 <sup>+0.5</sup> <sub>0</sub> dia.	R40	10	29.4N	Fluororesin	Plastic	None	210	39 Page (39-B)
E32-T12R 2M	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	29.4N	PVC	Plastic	None	60	11 Page (11-C)
E32-T14 2M	−40 to 70°C	0.49N · m	–	R25	10	29.4N	Polyethylene	Plastic	None	60	25 Page (25-D)
E32-T14F 2M	−40 to 70°C	0.78N · m	5.5 <sup>+0.5</sup> <sub>0</sub> dia.	R40	10	29.4N	Fluororesin	Plastic	None	220	39 Page (39-D)
E32-T14LR 2M	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	29.4N	PVC	Plastic	None	60	11 Page (11-D)
E32-T15XR 2M	−40 to 70°C	0.15N · m	–	R1	0	29.4N	PVC	Plastic	None	60	15 Page (15-A)
E32-T15YR 2M	−40 to 70°C	0.15N · m	–	R1	0	29.4N	PVC	Plastic	None	60	15 Page (15-B)
E32-T15ZR 2M	−40 to 70°C	0.15N · m	–	R1	0	29.4N	PVC	Plastic	None	60	15 Page (15-C)
E32-T16JR 2M	−40 to 70°C	0.29N · m	–	R1	0	29.4N	PVC	Plastic	None	60	49 Page (49-B)
E32-T16PR 2M	−40 to 70°C	0.29N · m	–	R1	0	29.4N	PVC	Plastic	None	60	49 Page (49-A)
E32-T16WR 2M	−25 to 55°C	0.29N · m	–	R1	0	9.8N	PVC	Plastic	None	60	49 Page (49-C)
E32-T17L 10M	−40 to 70°C	0.78N · m	14.5 <sup>+1</sup> <sub>0</sub> dia.	R25	10	29.4N	Polyethylene	Plastic	None	240	25 Page (25-B)
E32-T21 2M	−40 to 70°C	0.78N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	PVC	Plastic	None	30	41 Page (41-B)
E32-T21-S1 2M	−40 to 70°C	0.78N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Polyethylene	Plastic	None	45	17 Page (17-D)
E32-T223R 2M	−40 to 70°C	0.20N · m	1.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	10	9.8N	Polyethylene	Plastic	None	40	11 Page (11-A)
E32-T22B 2M	−40 to 70°C	0.20N · m	1.7 <sup>+0.5</sup> <sub>0</sub> dia.	R4	10	9.8N	PVC	Plastic	None	40	11 Page (11-B) 41 Page (41-A)
E32-T22S 2M	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	29.4N	PVC	Plastic	None	60	31 Page (31-F)
E32-T24E 2M	−40 to 70°C	0.29N · m	2.7 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Polyethylene	Plastic	None	40	17 Page (17-B)
E32-T24R 2M	−40 to 70°C	0.29N · m	2.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	9.8N	Polyethylene	Plastic	None	40	17 Page (17-A)
E32-T24S 2M	−40 to 70°C	0.29N · m	–	R10	10	29.4N	PVC	Plastic	None	60	31 Page (31-E) 57 Page (57-E)
E32-T24SR 2M	−40 to 70°C	0.29N · m	–	R1	0	9.8N	PVC	Plastic	None	60	31 Page (31-D) 57 Page (57-D)
E32-T25XB 2M	−40 to 70°C	0.15N · m	–	R4	10	9.8N	PVC	Plastic	None	40	41 Page (41-D)

\*1 Unbendable length of cable from fiber head.  
Do not bend the cable for at least 20 mm from where the cable inserts into the Fiber Amplifier Unit.  
\*2 Ambient operating temperature of the recommended reflector (E39-RP1) is −40 to 60°C.

Models	Installation			Cable						Weight (packed state) (g)	Dimensions Page No.
	Ambient temperature	Tightening torque	Mounting hole	Bending radius	Unbendable length*1	Tensile strength	Sheath material	Core material	Emitter/receiver differentiation		
<b>E32-T33 1M</b>	−40 to 70°C	0.29N · m	3.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Polyethylene	Plastic	None	40	17 Page (17-C)
<b>E32-T51 2M</b>	−40 to 150°C *2	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R35	10	29.4N	Fluororesin	Plastic	None	70	45 Page (45-B)
<b>E32-T51F 2M</b>	−40 to 150°C *2	0.78N · m	5.5 <sup>+0.5</sup> <sub>0</sub> dia.	R40	10	29.4N	Fluororesin	Plastic	None	220	39 Page (39-E)
<b>E32-T51R 2M</b>	−40 to 100°C *3	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R2	0	29.4N	Polyurethane	Plastic	None	60	45 Page (45-A)
<b>E32-T51V 1M</b>	−25 to 120°C	0.29N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R30	10	29.4N	Fluororesin	Glass	None	160	53 Page (53-A)
<b>E32-T61-S 2M</b>	−60 to 350°C *4	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	29.4N	SUS	Glass	None	200	45 Page (45-D)
<b>E32-T81R-S 2M</b>	−40 to 200°C *4	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R10	10	9.8N	Fluororesin	Glass	None	60	45 Page (45-C)
<b>E32-T84SV 1M</b>	−25 to 200°C	0.29N · m	4.5 <sup>+0.5</sup> <sub>0</sub> dia.	R25	10	29.4N	SUS	Glass	None	190	53 Page (53-C)
<b>E32-TC200BR 2M</b>	−40 to 70°C	0.78N · m	4.2 <sup>+0.5</sup> <sub>0</sub> dia.	R1	0	29.4N	PVC	Plastic	None	60	17 Page (17-E)
<b>E32-VF1</b>	−25 to 70°C	—	—	—	—	—	—	—	—	240	53 Page (53-F)
<b>E32-VF4</b>	−25 to 70°C	—	—	—	—	—	—	—	—	280	53 Page (53-E)
<b>E39-F1</b>	−40 to 200°C	—	—	—	—	—	—	—	—	2	26 Page (26-A) 27 Page (27-A) to (27-C) 28 Page (28-A) 29 Page (29-A) to (29-C)
<b>E39-F1-33</b>	−40 to 200°C	—	—	—	—	—	—	—	—	3	28 Page (28-D)
<b>E39-F11</b>	—	—	—	—	—	—	—	—	—	30	—
<b>E39-F16</b>	−60 to 350°C	—	—	—	—	—	—	—	—	15	26 Page (26-B) 27 Page (27-D) to (27-F) 28 Page (28-B) 29 Page (29-D) to (29-F), (29-K)
<b>E39-F17</b>	−25 to 70°C	—	—	—	—	—	—	—	—	10	21 Page (21-B)
<b>E39-F18</b>	−40 to 70°C	—	—	—	—	—	—	—	—	5	23 Page (23-G), (23-H)
<b>E39-F1V</b>	−25 to 120°C	—	—	—	—	—	—	—	—	3	53 Page (53-B)
<b>E39-F2</b>	−40 to 200°C	—	—	—	—	—	—	—	—	2	26 Page (26-C) 27 Page (27-G), (27-H) 28 Page (28-C) 29 Page (29-G) to (29-I)
<b>E39-F32A 1M</b>	−40 to 150°C	—	—	R30	—	—	—	—	—	70	43 Page (43-G)
<b>E39-F32C 1M</b>	−40 to 150°C	—	—	R30	—	—	—	—	—	110	41 Page (41-E) 43 Page (43-G)
<b>E39-F32D 1M</b>	−40 to 150°C	—	—	R30	—	—	—	—	—	80	43 Page (43-G)
<b>E39-F3A</b>	−40 to 70°C	—	—	—	—	—	—	—	—	2	21 Page (21-A)
<b>E39-F3A-5</b>	−40 to 70°C	—	—	—	—	—	—	—	—	1	23 Page (23-A), (23-B), (23-C)
<b>E39-F3B</b>	−40 to 70°C	—	—	—	—	—	—	—	—	2	23 Page (23-D), (23-E), (23-F)
<b>E39-F3C</b>	−40 to 70°C	—	—	—	—	—	—	—	—	1	21 Page (21-C), (21-D)
<b>E39-R1</b>	−25 to 55°C	—	—	—	—	—	—	—	—	20	35 Page (35-B)
<b>E39-R3</b>	−25 to 55°C	—	—	—	—	—	—	—	—	20	35 Page (35-C)
<b>E39-RP1</b>	−40 to 60°C	—	—	—	—	—	—	—	—	25	35 Page (35-A) 97 Page (97-G)
<b>E39-RP37</b>	−25 to 55°C	—	—	—	—	—	—	—	—	4	—
<b>E39-RSP1</b>	−25 to 55°C	—	—	—	—	—	—	—	—	4	—

\*1 Unbendable length of cable from fiber head.

Do not bend the cable for at least 20 mm from where the cable inserts into the Fiber Amplifier Unit.

\*2 For continuous operation, use the Fiber Unit between −40 to 130°C.

\*3 For continuous operation, use the Fiber Unit between −40 to 90°C.

\*4 The heat-resistant rating is not the same for all parts of the Fiber Unit. Refer to the dimensions diagrams for details.

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	Transparent Objects
BGS	
Retro-reflective	Environmental Immunity
Limited-reflective	
Chemical-resistant, Oil-resistant	Applications
Bending	
Heat-resistant	Fiber Amplifiers, Communications Unit, and Accessories
Area Detection	
Liquid-level	Technical Guide and Precautions
Vacuum	
FPD, Semi, Solar	Model Index
Installation Information	

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflectiveLimited-  
reflectiveChemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistantArea  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

## Smart Fiber Amplifier Units

### E3NX-FA Series **NEW**

## A Smart Fiber Amplifier Unit with Ultra-stable Detection and Ultra-easy Setup

### Expanded Application Response Capabilities Advanced Basic Performance

Improvements in the sensing distance and minimum sensing object have increased the range of application for stable detection.

**1.5 Times** the Sensing Distance\*

**6 m**

For E32-LT11 Fiber Unit with a fiber length of 3.5 m

**1/10th** the Minimum Sensing Object\*

**0.3  $\mu$ m dia.**

Typical example of actual measurements with E32-D11R Fiber Unit

\*Compared to E3X-HD.

### Achieve Easy Detection in Many Applications

#### Advanced Smart Tuning

Just press the **TUNE** button once with a workpiece and once without a workpiece to automatically set the optimum incident level and threshold. Consistent settings are achieved for all users with this ultra-easy procedure.



#### Automatic Setting of Optimum Values

Threshold + Incident Level


5000 9999

Set to the intermediate value between the incident levels with and without a workpiece.

Incident level adjustment with and without a workpiece

#### Optimum Light Intensity Adjustment from Transparent Objects to Black Workpieces

The incident level is optimized to enable stable detection even for saturated or insufficient incident levels.

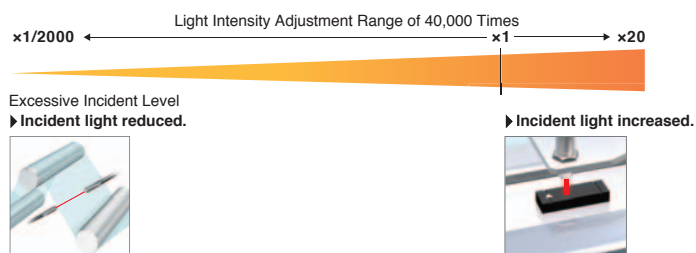

## Sensor Communications Units for E3NX-FA

### E3NW Series **NEW**


## The Next-generation E3NW Sensor Network Units Revolutionize On-site Sensing

The Sensor Communications Unit with a master function and the Distributed Sensor Units with slave functions enable N-Smart Sensors communication over open networks.

EtherCAT

CompoNet

CC-Link V2

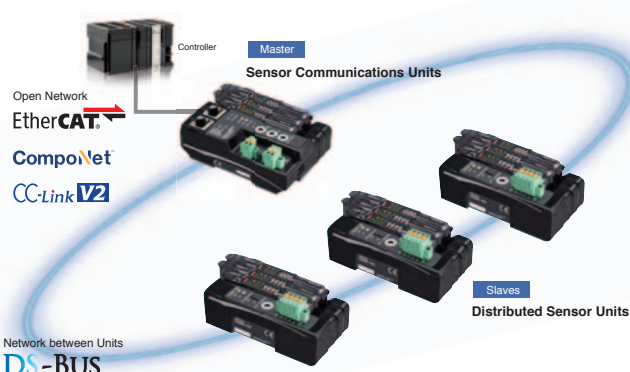

### Greatly Reduced Machine Manufacturing Costs

There is no need to change the current distributed installation to introduce a network without increasing costs.

### Greatly Reduced Machine Commissioning Time

All of the settings can be made at the same time from a Touch Panel.

### Greatly Improved Machine Productivity

Realtime monitoring lets you perform maintenance before malfunctions occur.

## Smart Fiber Amplifier Units

### E3X-HD Series

Affordable Amplifier Units  
with Simple Operation and  
Stable Detection Capabilities



78  
Page

## Sensor Communications Units for E3X-HD

### E3X-ECT / E3X-CRT

Sensor Communications  
Units for CompoNet and  
EtherCAT



78  
Page

### <Fiber Amplifier Unit Comparison>

		E3NX-FA Series <i>NEW</i>	E3X-HD Series
Fiber Amplifier Unit specifications	Output	1 or 2 outputs (depending on the model)	1 output
	External input	Supported or not supported (depending on the model)	Not supported
	Response time	30 $\mu$ s (32 $\mu$ s)/250 $\mu$ s/1 ms/16 ms (Default: 250 $\mu$ s)	50 $\mu$ s (55 $\mu$ s)/250 $\mu$ s/1 ms/16 ms (Default: 250 $\mu$ s)
	Sensing distance (Giga-power mode)	E32-T11R 3,000 mm	2,000 mm
		E32-D11R 1,260 mm	840 mm
	Minimum sensing object	E32-T11R 2 $\mu$ m dia.	5 $\mu$ m dia.
Sensor Communications Unit application	Communications method (Sensor Communications Unit model)	EtherCAT (E3NW-ECT) CompoNet (E3NW-CRT) CC-Link (E3NW-CCL)	EtherCAT (E3X-ECT) CompoNet (E3X-CRT)
	Applicable Sensors	Fiber Sensor (E3NX-FA0) Laser Sensors (E3NC-LA0, E3NC-SA0) Contact-Type Sensor (E9NC-TA0) *	Fiber Sensor (E3X-HD0) Fiber Sensor (E3X-DA0-S, E3X-MDA0) Laser Photoelectric Sensor (E3C-LDA0) Proximity Sensor (E2C-EDA0)
Page listings	Ordering Information	64 Page	78 Page
	Ratings and Specifications	66 Page	80 Page
	Dimensions	68 Page	80 Page

\* E3NW-CRT Sensor Communications Units (CompoNet) cannot be used.

## Fiber Amplifier Unit Accessories

65, 79  
Page

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded

Standard Installation

Cylindrical

Flat

Saving Space

Sleeved

Small Spot

High Power

Narrow view

Beam Improvements

BGS

Retro-reflective

Transparent Objects

Limited-reflective

Chemical-resistant,  
Oil-resistant

Environmental Immunity

Bending

Heat-resistant

Area Detection

Liquid-level

Applications

Vacuum

FPD,  
Semi,  
Solar

Installation  
Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

E3NX-FA Fiber Amplifier Units and Related Products **NEW**




## Fiber Amplifier Units E3NX-FA Series

Type	Appearance	Connecting method	Inputs/ outputs	Models		Ratings and Specifications	Dimensions
				NPN output	PNP output		
Standard models		Pre-wired (2 m)	1 output	<b>E3NX-FA11 2M</b>	<b>E3NX-FA41 2M</b>	Page 66	Page 68 <b>(68-A)</b>
		Wire-saving Connector	1 output	<b>E3NX-FA6</b>	<b>E3NX-FA8</b>		Page 68 <b>(68-B)</b>
Advanced models		Pre-wired (2 m)	2 outputs + 1 input	<b>E3NX-FA21 2M</b>	<b>E3NX-FA51 2M</b>		Page 68 <b>(68-A)</b>
		Wire-saving Connector	1 output + 1 input	<b>E3NX-FA7</b>	<b>E3NX-FA9</b>		Page 68 <b>(68-B)</b>
			2 outputs	<b>E3NX-FA7TW</b>	<b>E3NX-FA9TW</b>		
		M8 Connector	1 output + 1 input	<b>E3NX-FA24</b>	<b>E3NX-FA54</b>		Page 69 <b>(69-A)</b>
			2 outputs	—	<b>E3NX-FA54TW</b>		
	Model for Sensor Communications Unit *		Connector for Sensor Communications Unit	—	<b>E3NX-FA0</b>		Page 69 <b>(69-B)</b>

\* A Sensor Communications Unit is required if you want to use the Fiber Amplifier Unit on a network.


## Sensor Communications Unit

## Sensor Communications Unit

Communication method	Appearance	Applicable Fiber Amplifier Model	Model	Ratings and Specifications	Dimensions
EtherCAT		E3NX-FA0	<b>E3NW-ECT</b>	Page 76	Page 77 <b>(77-A)</b>
CompoNet			<b>E3NW-CRT</b>	*	*
CC-Link			<b>E3NW-CCL</b>		

\* For details, refer to your OMRON website.

## Distributed Sensor Unit





Appearance	Applicable Fiber Amplifier Model	Model	Ratings and Specifications	Dimensions
	E3NX-FA0	<b>E3NW-DS</b>	Page 76	Page 77 <b>(77-B)</b>

Note. The Distributed Sensor Unit can be connected to any of the Sensor Communications Units.

### Accessories (sold separately)



#### Wire-saving connectors (Required for models for Wire-saving Connectors.)

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately. \* Protective stickers: provided.

Type	Appearance	Cable length	Number of conductors	Applicable Fiber Amplifier Units	Models	Ratings, Specifications and Dimensions
Master Connector		2 m	4	E3NX-FA7 E3NX-FA7TW E3NX-FA9 E3NX-FA9TW	<b>E3X-CN21</b>	Page 88 <b>(88-A)</b>
Slave Connector			2		<b>E3X-CN22</b>	Page 88 <b>(88-B)</b>
Master Connector			3	E3NX-FA6 E3NX-FA8	<b>E3X-CN11</b>	Page 88 <b>(88-A)</b>
Slave Connector			1		<b>E3X-CN12</b>	Page 88 <b>(88-B)</b>


#### Sensor I/O Connectors (Required for models with M8 Connectors.)

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately. \* Protective stickers: provided.

Appearance	Cable length	Number of conductors	Models	Ratings and Specifications	Dimensions
	2 m	4	<b>XS3F-M421-402-A</b>	Page 88	Page 88 <b>(88-C)</b>
	5 m		<b>XS3F-M421-405-A</b>		
	2 m		<b>XS3F-M422-402-A</b>		Page 88 <b>(88-D)</b>
	5 m		<b>XS3F-M422-405-A</b>		


#### Mounting Bracket

A Mounting Bracket is not provided with the Fiber Amplifier Unit and must be ordered separately as required.

Appearance	Model	Quantity	Dimensions
	<b>E39-L143</b>	1	Page 89 <b>(89-A)</b>

#### DIN Track


A Din Track is not provided with the Fiber Amplifier Unit and must be ordered separately as required.

Appearance	Type	Models	Quantity	Dimensions
	Shallow type, total length: 1 m	<b>PFP-100N</b>	1	Page 89 <b>(89-B)</b>
	Shallow type, total length: 0.5 m	<b>PFP-50N</b>		
	Deep type, total length: 1 m	<b>PFP-100N2</b>		Page 89 <b>(89-C)</b>

#### End Plate

Two End Plates are provided with the Sensor Communications Unit.

End Plates are not provided with the Fiber Amplifier Unit and must be ordered separately as required.

Appearance	Model	Quantity	Dimensions
	<b>PFP-M</b>	1	Page 89 <b>(89-D)</b>

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	Transparent Objects
BGS	
Retro-reflective	Environmental Immunity
Limited-reflective	
Chemical-resistant, Oil-resistant	Applications
Bending	
Heat-resistant	Installation Information
Area Detection	
Liquid-level	Fiber Amplifiers, Communications Unit, and Accessories
Vacuum	
FPD, Semi, Solar	Technical Guide and Precautions
Installation Information	

Ratings and Specifications

Item		Type	Standard		Advanced				Model for Sensor Communications Unit	
		NPN output	E3NX-FA11	E3NX-FA6	E3NX-FA21	E3NX-FA7	E3NX-FA7TW	E3NX-FA24	—	E3NX-FA0
		PNP output	E3NX-FA41	E3NX-FA8	E3NX-FA51	E3NX-FA9	E3NX-FA9TW	E3NX-FA54	E3NX-FA54TW	
Connecting method		Pre-wired	Wire-saving Connector	Pre-wired	Wire-saving Connector		M8 Connector		Connector for Sensor Communications Unit	
Inputs / Outputs	Output	1 output		2 outputs	1 output	2 outputs	1 output	2 outputs	— *1	
	External input	—		1 input	1 input	—	1 input	—		
Light source (wavelength)		Red, 4-element LED (625 nm)								
Power supply voltage		10 to 30 VDC , including 10% ripple (p-p)							Supplied from the connector through the Sensor Communications Unit	
Power consumption *2		At Power Supply Voltage of 24 VDC. Standard Models or Model for Sensor Communications Unit: Normal mode: 960 mW max. (Current consumption: 40 mA max.) Eco ON: 720 mW max. (Current consumption: 30 mA max.) Eco LO: 840 mW max. (Current consumption: 35 mA max.) Advanced Models: Normal mode: 1,080 mW max. (Current consumption: 45 mA max.) Eco ON: 840 mW max. (Current consumption: 35 mA max.) Eco LO: 960 mW max. (Current consumption: 40 mA max.)								
Control output		Load power supply voltage: 30 VDC max., open-collector output Load current: Groups of 1 to 3 Amplifier Units: 100 mA max., Groups of 4 to 30 Amplifier Units: 20 mA max. (Residual voltage: At load current of less than 10 mA: 1 V max., At load current of 10 to 100 mA: 2 V max.) OFF current: 0.1 mA max.							—	
External input		—		Refer to *3.		—	Refer to *3.	—		
Indicators		7-segment displays (Sub digital display: green, Main digital display: white) Display direction: Switchable between normal and reversed. OUT indicator (orange), L/D indicator (orange), ST indicator (blue), DPC indicator (green) OUT Selection Indicator (orange)(only on models with 2 outputs)								
Protection circuits		Power supply reverse polarity protection, output short-circuit protection, and output reverse polarity protection							Power supply reverse polarity protection and output short-circuit protection	
Response time	Super-high-speed mode (SHS) *4	Operate or reset for model with 1 output: 30 μs, with 2 outputs: 32 μs								
	High-speed mode (HS)	Operate or reset: 250 μs								
	Standard mode (Stdnd)	Operate or reset: 1 ms								
	Giga-power mode (GIGA)	Operate or reset: 16 ms								
Sensitivity adjustment		Smart tuning (2-point tuning, full auto tuning, position tuning, maximum sensitivity tuning, power tuning, or percentage tuning (–99% to 99%)) or manual adjustment								
Maximum connectable Units		30 units							With E3NW-ECT: 30 units *5 With E3NW-CRT: 16 units With E3NW-CCL: 16 units	
Mutual interference prevention	Super-high-speed mode (SHS) *4	Possible for up to 0 units								
	High-speed mode (HS)	Possible for up to 10 units								
	Standard mode (Stdnd)	Possible for up to 10 units								
	Giga-power mode (GIGA)	Possible for up to 10 units								
Functions	Auto power control (APC)	Always ON								
	Dynamic power control (DPC)	Provided								
	Timer	Select from timer disabled, OFF-delay, ON-delay, one-shot, or ON-delay + OFF-delay timer. 1ms to 9999ms								
	Zero reset	Negative values can be displayed. (Threshold value is shifted.)								
	Resetting settings *6	Select from initial reset (factory defaults) or user reset (saved settings).								

\*1. Two sensor outputs are allocated in the programmable logic controller PLC I/O table.  
PLC operation via Communications Unit enables reading detected values and changing settings.

\*2. At Power Supply Voltage of 10 to 30 VDC.  
Standard Models or Model for Sensor Communications Unit:  
Normal mode: 1,080 mW max. (Current consumption: 36 mA max. at 30 VDC, 108 mA max. at 10 DVC)  
Eco ON: 880 mW max. (Current consumption: 28 mA max. at 30 VDC, 88 mA max. at 10 VDC)  
Eco LO: 980 mW max. (Current consumption: 32 mA max. at 30 VDC, 98 mA max. at 10 VDC)  
Advanced Models:  
Normal mode: 1,230 mW max. (Current consumption: 41 mA max. at 30 VDC, 123 mA max. at 10 DVC)  
Eco ON: 1,030 mW max. (Current consumption: 33 mA max. at 30 VDC, 103 mA max. at 10 VDC)  
Eco LO: 1,130 mW max. (Current consumption: 37 mA max. at 30 VDC, 113 mA max. at 10 VDC)

\*3. The following details apply to the input.

	Contact input (relay or switch)	Non-contact input (transistor)	Input time *3-1
NPN type	ON: Shorted to 0V (Sourcing current: 1 mA max.). OFF: Open or shorted to Vcc.	ON: 1.5V max. (Sourcing current: 1 mA max.). OFF: Vcc – 1.5 V to Vcc (Leakage current: 0.1 mA max.)	ON : 9ms min. OFF : 20ms min.
PNP type	ON: Shorted to Vcc (Sinking current: 3 mA max.). OFF: Open or shorted to 0V.	ON: Vcc – 1.5 V to Vcc (Sinking current: 3 mA max.). OFF: 1.5V max.(Leakage current: 0.1 mA max.)	

\*3-1. Input time is 25 ms (ON)/(OFF) only when (in tUnE) or (in PtUn) input is selected.

\*4. The mutual interference prevention function is disabled if the detection mode is set to super-high-speed mode.

\*5. When connected to an OMRON NJ-series Controller.

\*6. The bank is not reset by the user reset function or saved by the user save function.


Item		Type	Standard		Advanced					Model for Sensor Communications Unit
		NPN output	E3NX-FA11	E3NX-FA6	E3NX-FA21	E3NX-FA7	E3NX-FA7TW	E3NX-FA24	—	E3NX-FA0
		PNP output	E3NX-FA41	E3NX-FA8	E3NX-FA51	E3NX-FA9	E3NX-FA9TW	E3NX-FA54	E3NX-FA54TW	
Connecting method		Pre-wired	Wire-saving Connector	Pre-wired	Wire-saving Connector		M8 Connector		Connector for Sensor Communications Unit	
Functions	Eco mode *7		Select from OFF (digital displays lit), Eco ON (digital displays not lit) or Eco LO (digital displays dimmed)							
	Bank switching		Select from banks 1 to 4.							
	Power tuning		Select from ON or OFF.							
	Output 1		Select from normal detection mode, or area detection mode.							
	Output 2		—		Select from normal detection mode, alarm output mode, or error output mode.		—		Select from normal detection mode, alarm output mode, or error output mode.	
	External input		—		Select from input OFF, tuning, power tuning, emission OFF, zero reset, or bank switching.		—		Select from input OFF, tuning, power tuning, emission OFF, zero reset, or bank switching.	
	Hysteresis width		Select from standard setting or user setting. For a user setting, the hysteresis width can be set to from 0 to 9,999.							
Ambient Illumination (Receiver side)			Incandescent lamp: 20,000 lx max., Sunlight: 30,000 lx max.							
Ambient temperature range			Operating: Groups of 1 to 2 Amplifier Units: –25 to 55°C, Groups of 3 to 10 Amplifier Units: –25 to 50°C, Groups of 11 to 16 Amplifier Units: –25 to 45°C, Groups of 17 to 30 Amplifier Units: –25 to 40°C Storage: –30 to 70°C (with no icing or condensation)							Operating: Groups of 1 to 2 Amplifier Units: 0 to 55°C, Groups of 3 to 10 Amplifier Units: 0 to 50°C, Groups of 11 to 16 Amplifier Units: 0 to 45°C, Groups of 17 to 30 Amplifier Units: 0 to 40°C Storage: –30 to 70°C (with no icing or condensation)
Ambient humidity range			Operating and storage: 35% to 85% (with no condensation)							
Altitude			2,000 m max.							
Installation environment			Pollution degree 3 (as per IEC 60947-1)							
Insulation resistance			20 MΩ min. (at 500 VDC)							
Dielectric strength			1,000 VAC at 50/60 Hz for 1 min							
Vibration resistance (destruction)			10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions							
Shock resistance (destruction)			500 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions							150 m/s <sup>2</sup> for 3 times each in X, Y, and Z directions
Weight (packed state/unit only)			Approx. 115 g/ Approx. 75 g	Approx. 60 g/ Approx. 20 g	Approx. 115 g/ Approx. 75 g	Approx. 60 g/Approx. 20 g		Approx. 65 g/Approx. 25 g		
Materials	Case		Polycarbonate (PC)							
	Cover		Polycarbonate (PC)							
	Cable		PVC							
Accessories			Instruction Manual							

\*7. Eco LO is supported for Amplifier Units manufactured in July 2014 or later.

## Dimensions


(Unit: mm)  
Tolerance class IT16 applies to demmensions in this date sheet unless otherwise specified.

## Pre-wired Amplifier Units

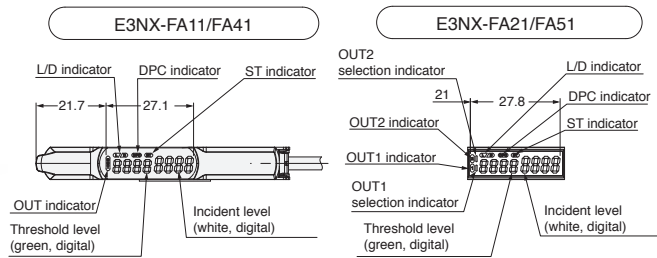
**(68-A)** E3NX-FA11  
E3NX-FA21  
E3NX-FA41  
E3NX-FA51

\*Cable Specifications


Models	Outer diameter	Number of conductors	Others
E3NX-FA11 E3NX-FA41	4.0 dia.	3	Conductor cross-section: 0.2 mm <sup>2</sup> Insulator dia.: 0.9 mm Standard length: 2 m
E3NX-FA21 E3NX-FA51	4.0 dia.	5	Minimum bending radius: 12 mm

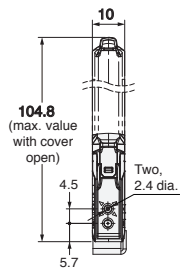


Mounted to DIN Track

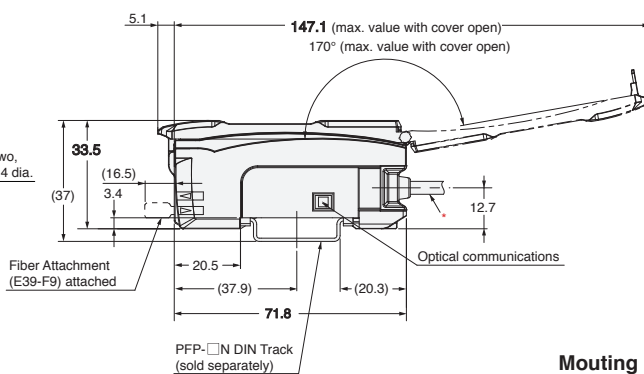


With Mounting Bracket Attached

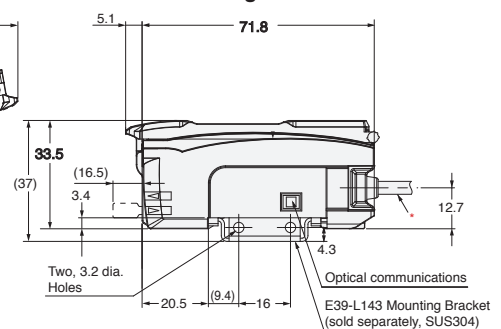

Mounting Holes




## Amplifier Units with Wire-saving Connectors

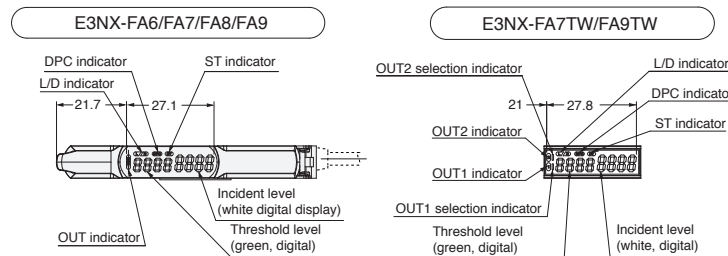
**(68-B)** E3NX-FA6  
E3NX-FA7  
E3NX-FA7TW  
E3NX-FA8  
E3NX-FA9  
E3NX-FA9TW

\*Cable Specifications


Models	Outer diameter	Number of conductors
E3X-CN12	2.6 dia.	1
E3X-CN22	2.6 dia.	2
E3X-CN11	4.0 dia.	3
E3X-CN21	4.0 dia.	4

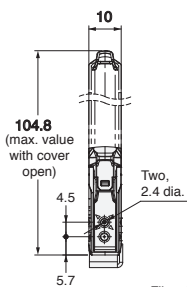


Mounted to DIN Track

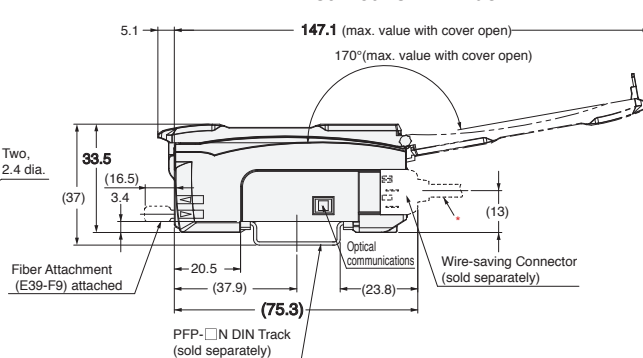

With Mounting Bracket Attached

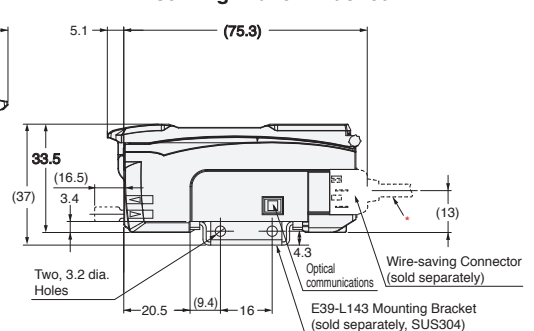


Mounting Holes

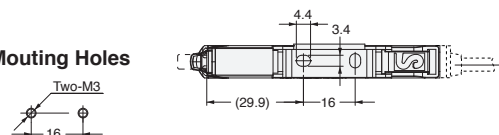


### Amplifier Units with M8 Connector

**69-A** E3NX-FA24  
E3NX-FA54  
E3NX-FA54TW

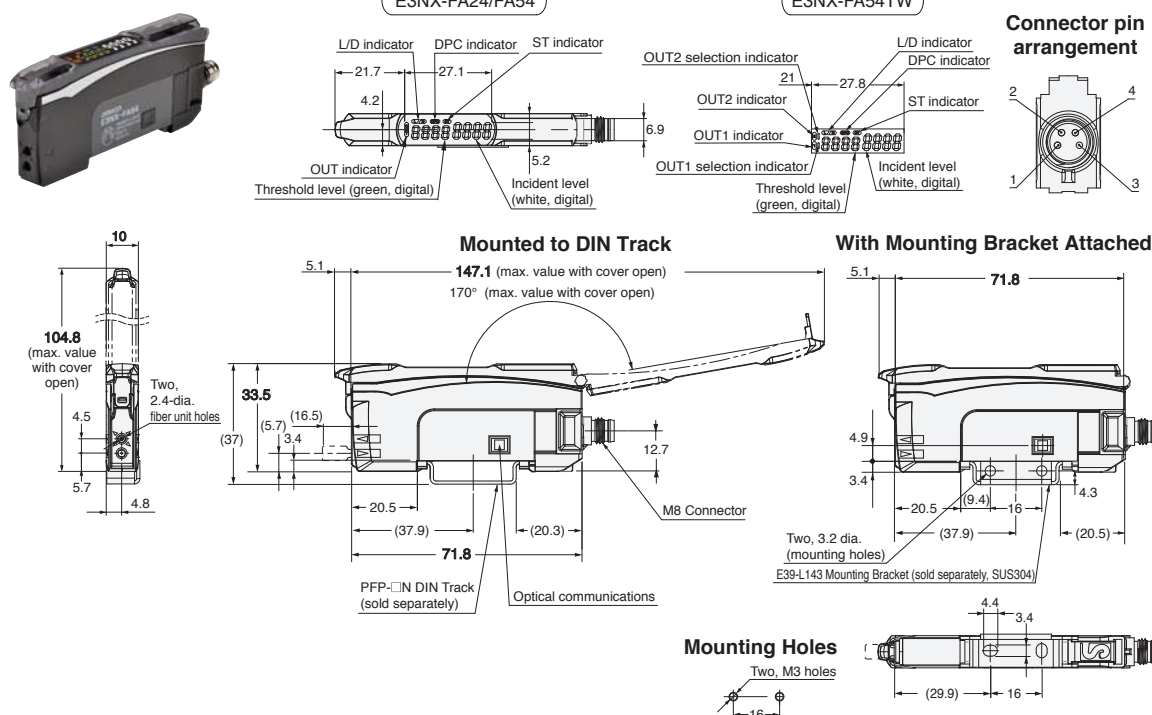

### Amplifier Unit with Connector for Sensor Communications Unit

**69-B** E3NX-FA0

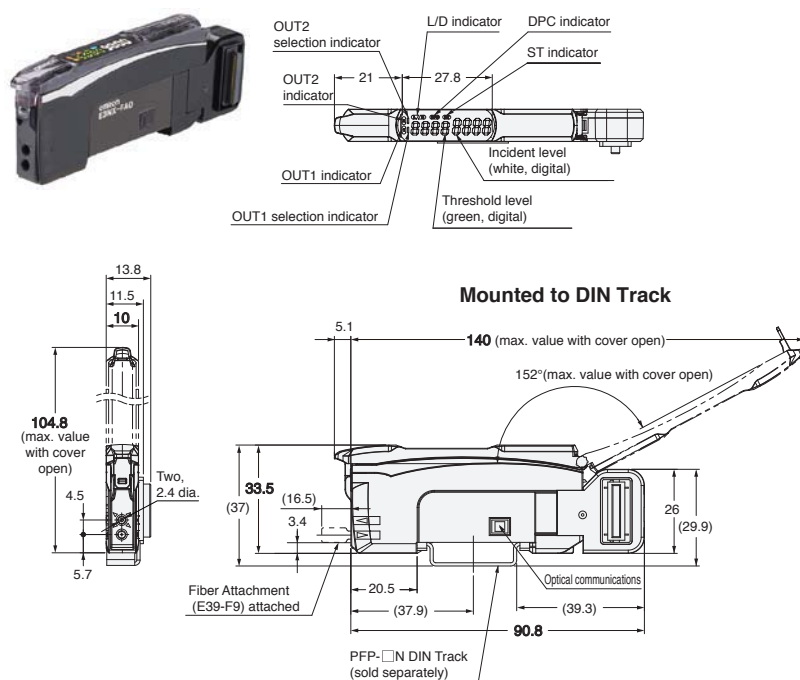

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	
BGS	

Retro-reflective	Transparent Objects
Limited-reflective	

Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	

Area Detection	Applications
Liquid-level	
Vacuum	
FPD, Semi, Solar	

Installation  
Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflectiveLimited-  
reflectiveChemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistantArea  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

## I/O Circuit Diagrams


## NPN Output

Models	Operation mode	Timing chart	L/D indicators	Output circuit
E3NX-FA11 E3NX-FA6	Light-ON	Incident light No incident light OUT indicator (orange) Lit Not lit Output transistor ON OFF Load Set Reset (Between brown and black leads)	L lit.	
	Dark-ON	Incident light No incident light OUT indicator (orange) Lit Not lit Output transistor OFF ON Load Set Reset (Between brown and black leads)	D lit.	
E3NX-FA21	Light-ON	ch1/ ch2 Incident light No incident light OUT indicator (orange) Lit Not lit Output transistor ON OFF Load Set Reset (Between brown and black (orange) leads)	L lit.	
	Dark-ON	ch1/ ch2 Incident light No incident light OUT indicator (orange) Lit Not lit Output transistor OFF ON Load Set Reset (Between brown and black (orange) leads)	D lit.	
E3NX-FA7 E3NX-FA24	Light-ON	Incident light No incident light OUT indicator (orange) Lit Not lit Output transistor OFF ON Load Set Reset (Between brown and black leads)	L lit.	<p>• M8 Connector Pin Arrangement</p>
	Dark-ON	Incident light No incident light OUT indicator (orange) Lit Not lit Output transistor OFF ON Load Set Reset (Between brown and black leads)	D lit.	
E3NX-FA7TW	Light-ON	ch1/ ch2 Incident light No incident light OUT indicator (orange) Lit Not lit Output transistor ON OFF Load Set Reset (Between brown and black (orange) leads)	L lit.	
	Dark-ON	ch1/ ch2 Incident light No incident light OUT indicator (orange) Lit Not lit Output transistor OFF ON Load Set Reset (Between brown and black (orange) leads)	D lit.	

## PNP Output

Models	Operation mode	Timing chart	L/D indicators	Output circuit
E3NX-FA41 E3NX-FA8	Light-ON			
	Dark-ON			
E3NX-FA51	Light-ON			
	Dark-ON			
E3NX-FA9 E3NX-FA54	Light-ON			<p>• M8 Connector Pin Arrangement</p>
	Dark-ON			
E3NX-FA9TW E3NX-FA54TW	Light-ON			<p>• M8 Connector Pin Arrangement</p>
	Dark-ON			

## Plug (Sensor I/O Connector)

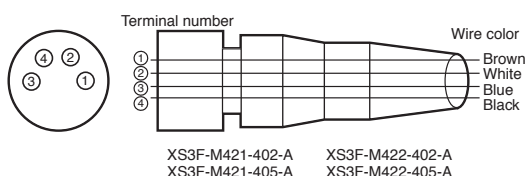

Wire color	Connection pin	Application
Brown	1	Power supply (+V)
White	2	External input / Output
Blue	3	Power supply (0 V)
Black	4	Output

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant,  
Oil-resistant

Bending

Heat-resistant

Area  
Detection


Liquid-level

Vacuum


FPD,  
Semi,  
Solar

## Nomenclature

## E3NX-FA11/FA41/FA6/FA8/FA7/FA9/FA24/FA54

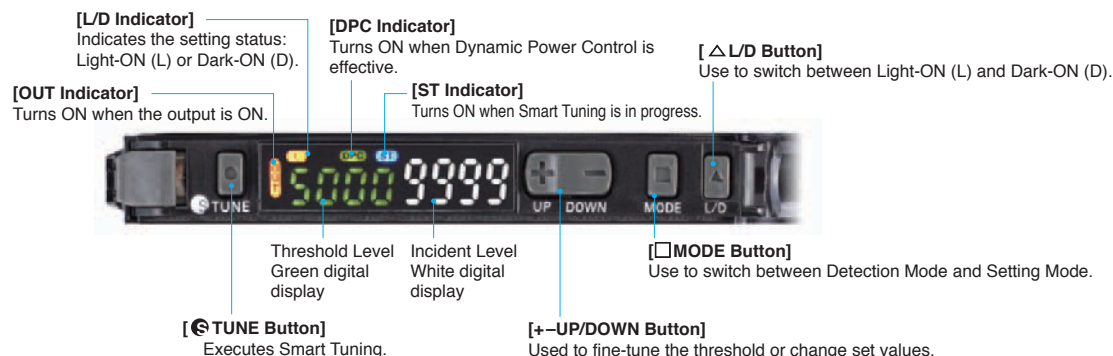

## E3NX-FA21/FA51/FA7TW/FA9TW/FA54TW/FA0

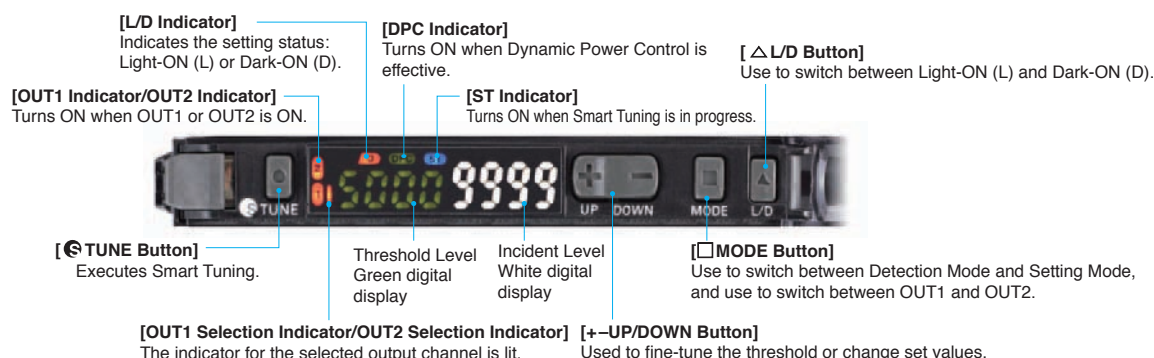

## Operating Procedures

## Basic Settings

## Output switching


1. Press button.

Through-beam:

Set to "Dark ON" to turn the output ON with a workpiece in the detection area. [L/D Indicator] turns **D** ON.

Reflective:

Set to "Light ON" to turn the output ON with a workpiece in the detection area. [L/D Indicator] turns **L** ON.

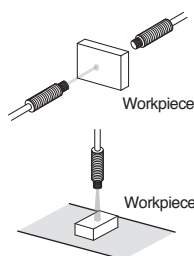


## Smart Tuning [Easy Sensitivity Setting]


## (1) Detect for Workpiece Presence/Absence

- 2-point Tuning

1. Press button with a workpiece in the detection area.

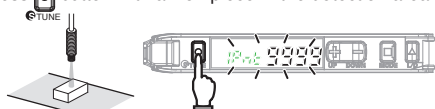

2. Press button again without a workpiece in the detection area. Release the button when **[20.00]** is displayed.



➔ Setting is Completed

**Incident light level setting:**  
The larger incident level of the Step 1 and 2 values is adjusted to the power tuning level.

**Threshold setting:**  
Set to the middle between the Step 1 and 2 incident light levels.




Step 1 and Step 2 can be reversed.

## (2) Enhance Durability of the Fiber Head against Dust and Dirt

- Maximum Sensitivity Tuning

1. Hold button for 3 seconds or longer with/without workpiece as shown below. Release the button when **[FULL]** is displayed.

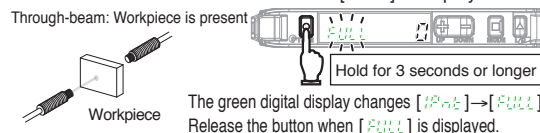

➔ Setting is Completed

**Incident light level setting:**  
The incident level in Step 1 is adjusted to "0".



**Threshold setting:**  
The value is set to approx. 7% of the incident light level of 1.

**CHECK!**  
However, the Sensor becomes more susceptible to the influence of background objects.

## (3) Adjust for Moving Workpiece without Stopping Line

- Full Auto Tuning

1. Hold the button without the presence of a workpiece, and pass the workpiece through while **[10.00]**→**[FULL]**→**[Auto]** is displayed in green digital.

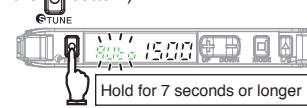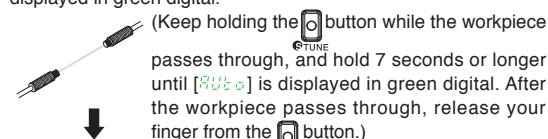

➔ Setting is Completed

**Incident light level setting:** Adjust the max. incident light level on Step 1 as the power tuning level.

**Threshold setting:** Set to the middle between max. and min. incident light levels on Step 1.

## Basic Settings

### (4) Determine Workpiece Position

#### ● Position Tuning

1. Turn ON power tuning in SET mode. Refer to "Detailed Settings"

2. Press button without a workpiece in the area.

3. Place the workpiece at the desired position and hold button.

The green digital display changes [20.00] → [0.05].

➔ Setting is Completed

Incident light level setting: The Step 3 incident level is adjusted to half the power tuning level.  
Threshold setting: Set to the same value as the Step 3 incident level.

### (5) Detect Transparent or Small Workpiece (Set Threshold by incident light level percentage)

#### ● Percentage Tuning

1. Turn ON Percentage Tuning in SET mode. Refer to "Detailed Settings"

2. Press button without a workpiece in the area.

➔ Setting is Completed


Incident light level setting: The Step 2 incident light level is adjusted to the power tuning level.  
Threshold setting: Set to the value obtained by [Incident Level at Step 2 × (1 + Percentage Tuning Level)].

No Smart Tuning other than Power Tuning can be used if Percentage Tuning is set.

### (6) Restore from the Incident Level Changed due to Dust and Dirt

#### ● Power Tuning

1. Hold and buttons for 1 second or longer without a workpiece in the area.



➔ Setting is Completed

Incident light level setting: The Step 1 incident level is adjusted to the power tuning level.  
Threshold setting: Not changed.

Perform the procedure with a workpiece in the area for reflective model setting. If the setting is made after position tuning, set both the through-beam model and reflective model with a workpiece.

Refer to "Smart Tuning Error" for error displays.

#### ● Smart Tuning Error

Error / Display / Cause	Error Origin Tuning Type	Remedy
Near Error 	2-point Tuning Full Auto Tuning	<ul style="list-style-type: none"> <li>Change the detection function mode to a slower response time mode.</li> <li>Reduce the distance between the emitter and receiver. (Through-beam)</li> <li>Place the Fiber Head closer to the sensing object. (Reflective)</li> </ul>
Over Error 	All	<ul style="list-style-type: none"> <li>Use a thin-diameter fiber.</li> <li>Widen the emitter and receiver distance. (Through-beam)</li> <li>Distance the Fiber Head from the sensing object. (Reflective)</li> </ul>
Incident light level is too high.		
Low Error 	Tuning other than Maximum Sensitivity Tuning	<ul style="list-style-type: none"> <li>Reduce the distance between the emitter and receiver. (Through-beam)</li> <li>Place the Fiber Head closer to the sensing object. (Reflective)</li> </ul>
Incident light level is too low.		


Refer to "Detailed Settings" to change the power tuning level.

### Channel switching

(Models with 2 Outputs: E3NX-FA21, E3NX-FA51, E3NX-FA7TW, E3NX-FA9TW) and E3NX-FA54TW

■ The OUT selection indicators and the settings will change.

1. Press button for 1 second.
2. The OUT selection indicators (OUT1/OUT2) switch.

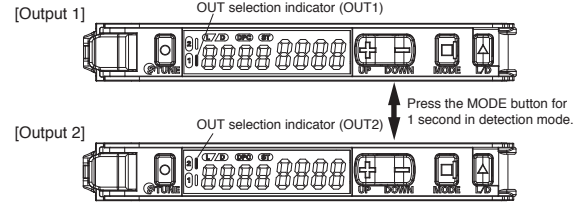

In the detailed settings, the OUT selection indicators will each light whenever the output (OUT1/OUT2) is set.

### Minute Adjustment of Threshold Level

1. Press button to adjust the threshold level.

The threshold level becomes higher. The threshold level becomes lower.



Hold the key for high-speed level adjustment.

## Convenient Setting Features

### (1) Stable Detection Regardless of Incident Level Change due to Dust and Dirt



- DPC Function (Use of the function with Through-beam model or Retro-reflective model is recommended)

1. Perform Smart Tuning.

Refer to "Smart Tuning"  
 Refer to "Power Tuning"

2. Set the DPC function ON in SET mode.

Refer to "Detailed Settings"

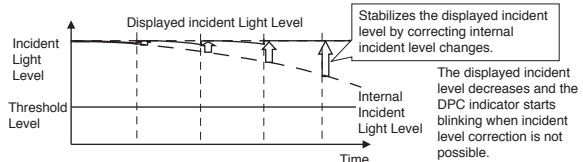

### (2) Reset Settings

- Setting Reset

Initializes all the settings by returning them to the factory defaults.

1. Hold button and then hold button for 3 seconds or longer.



2. Select [] in and press button.

3. Select [ YES] in and press button.

### (3) Save or Read Settings

1. Hold button and then hold button for 3 seconds or longer.

- User Save Function

Saves the current settings.

2. Select [] in and press button.

3. Select [ YES] in and press button.

- User Reset Function

Reads out the saved settings.

2. Select [] in and press button.


3. Select [ USER] in and press button.

### (4) Prevent Mistake-operation

- Key Lock Function

Disables all button operations. [ ON] is displayed when the button is pressed.

- Enable/Cancel (This procedure)



\* Press either of UP/DOWN.

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflectiveLimited-  
reflectiveChemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistantArea  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar


## Convenient Setting Features

## (5) Reset Incident Light Level to "0"


## ● Zero Reset Function

Changes the incident light level to "0".  
The threshold level is also shifted accordingly.  
The lower limit of the threshold is -1,999.

## ■ Enable



## ■ Cancel



## (6) Producing an Output When the Incident Level Is within an Area


## ● Area Detection Mode

- Select [SET Mode] - [OUT1 Mode] - [Area Detection Mode]. Press button for at least 3 seconds to leave the SET mode.

- Press button in [Detection Mode] to display OUT1 HIGH and OUT 1 LOW. "HIGH" and "LOW" will appear on the green digital display.

- Press button for the high and low thresholds to execute smart tuning.

Percentage Tuning: The thresholds are set as follows:  
High: Incident level from step 3 + Incident level from step 3 × Percentage tuning level  
Low: Incident level from step 3 - Incident level from step 3 × Percentage tuning level




## (7) Monitoring the Incident Level for Sensing Objects Passing at High Speed

## ● Change Finder

- Select [SET Mode] → [Digital Display] to set 
- Press button for 3 seconds or longer to leave the SET mode.
- Send a workpiece past the Fiber Unit.
- The maximum and minimum incident levels will be displayed for 0.5 seconds when the workpiece passes.





The maximum value and minimum value are displayed with Light-ON and Dark-ON respectively.



## (8) Determining If the Workpiece Can Be Detected

## ● Solution Viewer

- Press button and button together for 3 seconds or longer to set button and button together for 3 seconds or longer to set 
- Send a workpiece past the Fiber Unit.
- Displaying the Passing Time and Difference in Incident Levels.
- Press button and button together for 3 seconds or longer to leave SET mode.



## Detailed Settings

Hold button for 3 seconds or longer to enter SET mode. The OUT selection indicators shows items for output 1 or output 2 individually for each output.

SET mode provides the function settings described hereafter. The initial display shown after transition from one function to another represents the factory default.



Function Setting	Description															
<b>1. Function Selection</b> 	<b>Changing Functions to Set in SET mode</b> : Functions 1. to 5. can be set : Functions 1. to 16. can be set.															
<b>2. Detection Function</b> (Incident Light Level Example) (a)  (b)  (c)  (d)	<b>Changing Light Level and Response Time</b> <table border="1"> <thead> <tr> <th>Detection Function</th> <th>Response Time</th> <th>Light Level</th> </tr> </thead> <tbody> <tr> <td>(a) HS High-speed mode</td> <td>250 μs</td> <td>1 (Standard)</td> </tr> <tr> <td>(b) STND Standard mode</td> <td>1ms</td> <td>1 time</td> </tr> <tr> <td>(c) GIGA Giga mode</td> <td>16ms</td> <td>8 times</td> </tr> <tr> <td>(d) SHS Super-high-speed mode*</td> <td>30μs</td> <td>0.25 times</td> </tr> </tbody> </table> <p>Smart Tuning is canceled if the detection mode is changed.</p> <p>* The communication and mutual interference prevention functions are disabled when the detection mode is set to super-high-speed mode. The response time for models with 2 outputs is 32 μs</p> <p> The incident light level in SET mode is a reference value. It may be changed when switched to detection mode.</p>	Detection Function	Response Time	Light Level	(a) HS High-speed mode	250 μs	1 (Standard)	(b) STND Standard mode	1ms	1 time	(c) GIGA Giga mode	16ms	8 times	(d) SHS Super-high-speed mode*	30μs	0.25 times
Detection Function	Response Time	Light Level														
(a) HS High-speed mode	250 μs	1 (Standard)														
(b) STND Standard mode	1ms	1 time														
(c) GIGA Giga mode	16ms	8 times														
(d) SHS Super-high-speed mode*	30μs	0.25 times														
<b>3. DPC Function</b> 	<b>Stable Detection Regardless of Incident Light Level Change</b> 															
<b>4. Timer Function</b> 	<b>Setting Output Timer</b> (Settings are displayed for both outputs for models with 2 outputs.) <table border="1"> <thead> <tr> <th>Off-delay Timer</th> <th>On-delay Timer</th> <th>One-shot Timer</th> <th>ON/OFF-delay Timer</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table>	Off-delay Timer	On-delay Timer	One-shot Timer	ON/OFF-delay Timer											
Off-delay Timer	On-delay Timer	One-shot Timer	ON/OFF-delay Timer													
<b>5. Power Tuning Level</b> 	<p>A timer value can be set after pressing  button when a timer menu (other display than "----") is displayed.</p> <p>Use  button to set the time. (1 to 9999 ms in 1 ms steps; the initial value: 10 ms)</p>															
<b>6. BANK Switching</b> 	<b>Changing the Target Incident Light Level (Power Tuning Level)</b> Use  button to set the power tuning level. [ 100 to 9999 in 1 steps; the initial value: 9999 ] 															
	<b>Saving Settings in Each Bank</b>															

Function Setting	Description																																				
<b>7. Power Tuning ON/OFF Setting</b> 	<b>Setting ON or OFF Incident Level Adjustment when Tuning</b> 																																				
<b>8. Percentage Tuning</b> 	<b>Detecting Transparent or Small Workpiece</b> Press  button in [P Er ON] menu, then use  button to set the percentage tuning level. (~99% to 99% in 1% steps; the initial value: ~10%) Refer to "Smart Tuning"																																				
<b>9. Output 1 Mode</b> 	<b>Changing the Output Mode for Output 1</b> 																																				
<b>10. Output 2 Mode</b> 	<b>Changing the Output Mode for Output 2</b> Alarm Output Mode: Press  button and then set the alarm output level with  button. (0 to 100 P in 1-P increments, default: 50 P) ON-delay of 300 ms is applied. Error Output Mode: An output is made when a DPC error, EEPROM error, or Load short circuit detection error occurs.																																				
<b>11. External Input</b> 	<b>Changing the Type of External Input</b> The closed-circuit input time for tuning is the same as the key input time. <table border="1"> <thead> <tr> <th></th> <th>First point</th> <th>Second point</th> </tr> </thead> <tbody> <tr> <td>2-point Tuning</td> <td>Less than 3 seconds</td> <td>Less than 3 seconds</td> </tr> <tr> <td>Maximum Sensitivity Tuning</td> <td>3 seconds min. Less than 7 seconds</td> <td>—</td> </tr> <tr> <td>Full Auto Tuning</td> <td>7.0 s or longer</td> <td>—</td> </tr> <tr> <td>Position Tuning</td> <td>Less than 3 seconds</td> <td>3 seconds or longer</td> </tr> <tr> <td>Zero reset</td> <td>Enable Less than 3 seconds</td> <td>Cancel 3 seconds min.</td> </tr> </tbody> </table> Enable/Cancel of Zero reset is the timing when input is turned off.		First point	Second point	2-point Tuning	Less than 3 seconds	Less than 3 seconds	Maximum Sensitivity Tuning	3 seconds min. Less than 7 seconds	—	Full Auto Tuning	7.0 s or longer	—	Position Tuning	Less than 3 seconds	3 seconds or longer	Zero reset	Enable Less than 3 seconds	Cancel 3 seconds min.																		
	First point	Second point																																			
2-point Tuning	Less than 3 seconds	Less than 3 seconds																																			
Maximum Sensitivity Tuning	3 seconds min. Less than 7 seconds	—																																			
Full Auto Tuning	7.0 s or longer	—																																			
Position Tuning	Less than 3 seconds	3 seconds or longer																																			
Zero reset	Enable Less than 3 seconds	Cancel 3 seconds min.																																			
<b>12. Digital Display</b> 	<b>Changing Digital Display in RUN Mode for Specific Purpose</b> Checking a Margin Against Threshold <table border="1"> <thead> <tr> <th>Threshold</th> <th>Light Level Ratio</th> <th></th> </tr> </thead> <tbody> <tr> <td>2000</td> <td>100%</td> <td>The ratio of the incident light level to the threshold is displayed in white digital figures.</td> </tr> </tbody> </table> Setting Threshold using a Small or Fast Moving Workpiece <table border="1"> <thead> <tr> <th>Peak Light Level</th> <th>Bottom Light Level</th> <th></th> </tr> </thead> <tbody> <tr> <td>2000</td> <td>2000</td> <td>Holds and displays the minimum value of the peak of the light incident and the maximum value of the bottom of the light interruption.</td> </tr> </tbody> </table> Setting for Intuitive Analog Display <table border="1"> <thead> <tr> <th>Threshold</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>120%</td> <td>100%</td> <td>80%</td> </tr> </tbody> </table> Displays the current level in the 80 to 120% range against the threshold value (100%). Adjusting Optical Axis <table border="1"> <thead> <tr> <th>Peak Light Level</th> <th>Light Level</th> <th></th> </tr> </thead> <tbody> <tr> <td>2000</td> <td>2000</td> <td>Holds the peak incident light level and displays it in green digital figures.</td> </tr> </tbody> </table> Checking the Channel No. in Group Mounting <table border="1"> <thead> <tr> <th>Ch. No.</th> <th>Light Level</th> <th></th> </tr> </thead> <tbody> <tr> <td>1-4</td> <td>2000</td> <td>Checking the Channel No. in Group Mounting.</td> </tr> </tbody> </table> Checking the Light Level of Fast Moving Workpiece <table border="1"> <thead> <tr> <th>Threshold</th> <th>Light level when the workpiece passes</th> <th></th> </tr> </thead> <tbody> <tr> <td>2000</td> <td>2000</td> <td>Light level when the workpiece passes is displayed in white digital figures for 0.5 seconds.</td> </tr> </tbody> </table>	Threshold	Light Level Ratio		2000	100%	The ratio of the incident light level to the threshold is displayed in white digital figures.	Peak Light Level	Bottom Light Level		2000	2000	Holds and displays the minimum value of the peak of the light incident and the maximum value of the bottom of the light interruption.	Threshold			120%	100%	80%	Peak Light Level	Light Level		2000	2000	Holds the peak incident light level and displays it in green digital figures.	Ch. No.	Light Level		1-4	2000	Checking the Channel No. in Group Mounting.	Threshold	Light level when the workpiece passes		2000	2000	Light level when the workpiece passes is displayed in white digital figures for 0.5 seconds.
Threshold	Light Level Ratio																																				
2000	100%	The ratio of the incident light level to the threshold is displayed in white digital figures.																																			
Peak Light Level	Bottom Light Level																																				
2000	2000	Holds and displays the minimum value of the peak of the light incident and the maximum value of the bottom of the light interruption.																																			
Threshold																																					
120%	100%	80%																																			
Peak Light Level	Light Level																																				
2000	2000	Holds the peak incident light level and displays it in green digital figures.																																			
Ch. No.	Light Level																																				
1-4	2000	Checking the Channel No. in Group Mounting.																																			
Threshold	Light level when the workpiece passes																																				
2000	2000	Light level when the workpiece passes is displayed in white digital figures for 0.5 seconds.																																			

Function Setting	Description
<b>13. Inverted Display</b> 	<b>Mounting Amplifier in Inverted Direction</b> Inverts the display upside down. The digital display shows the threshold value in green, and light incident level in white.
<b>14. Eco Function</b> 	<b>Saving Power Consumption</b> ECo on Indicators (Green and White digital displays) turn OFF in approx. 10 seconds after a key operation. ECo Lo Indicators (Green and White digital displays) turn ON with low brightness in approx. 10 seconds after a key operation.
<b>15. Hysteresis width</b> 	<b>Changing the Hysteresis Width</b> The hysteresis width is set to a default value. The hysteresis width is set so that the judgement output is stable near the threshold value. Be sure to check the stability of outputs as there is a possibility of chattering. Press  button with [Hyst-] displayed and then set the hysteresis width with  button. (0 to 9999)
<b>16. Using the External Input to Write to EEPROM</b> 	<b>Turning ON and OFF Writing to EEPROM</b> The settings that have been changed by an external input with [rEw] will not be overwritten to prevent EEPROM from reaching its lifespan (1,000,000 writings).




Dimensions

(Unit: mm)

Tolerance class IT16 applies to demmensions in this date sheet unless otherwise specified.


Sensor Communications Unit

77-A E3NW-ECT

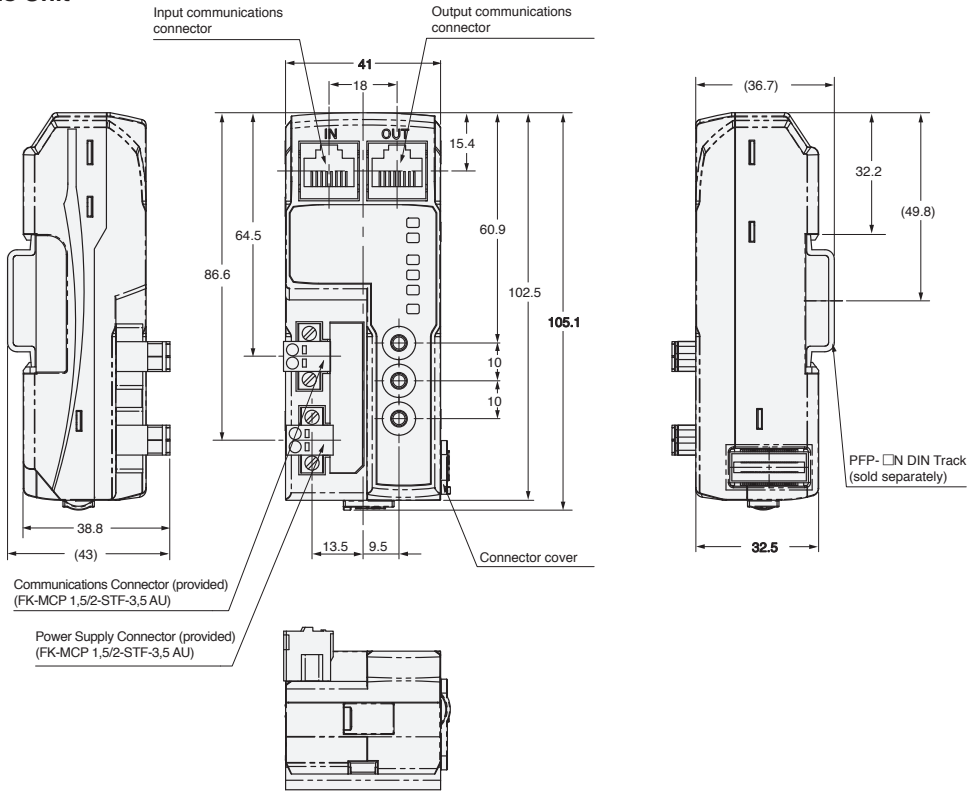

Distributed Sensor Unit

77-B E3NW-DS

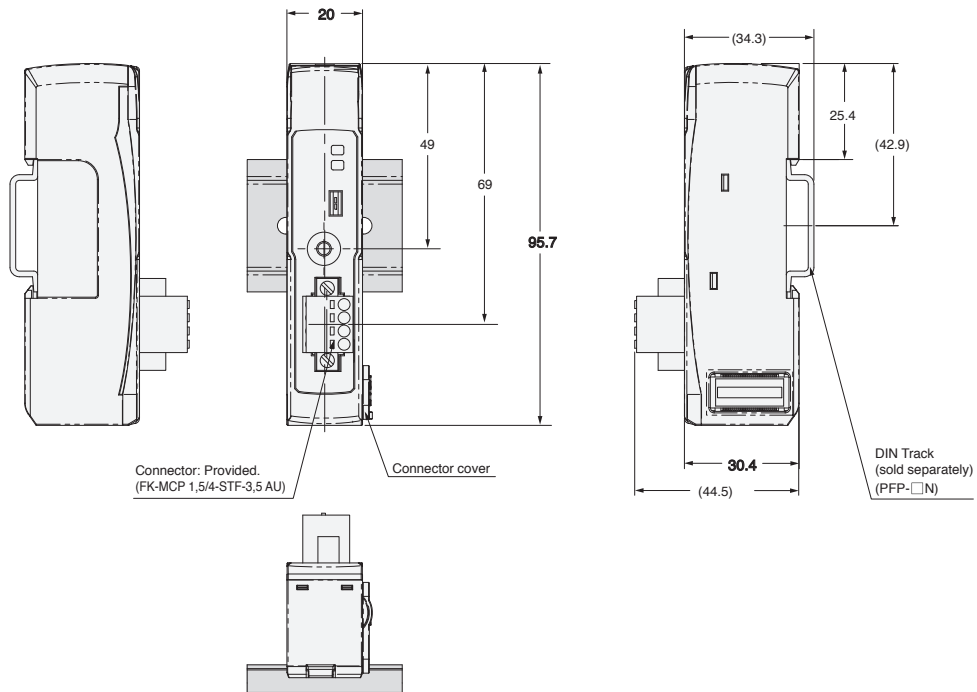

Fiber Sensor Features

Selection Guide

Fiber Units

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	
BGS	Transparent Objects
Retro-reflective	
Limited-reflective	
Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	
Area Detection	Applications
Liquid-level	
Vacuum	
FPD, Semi, Solar	

Installation Information





Fiber Amplifiers, Communications Unit, and Accessories

Technical Guide and Precautions



Model Index

## E3X-HD Fiber Amplifier Units and Related Products

## Fiber Amplifier Units E3X-HD Series

Type	Appearance	Connecting method	Models		Ratings and Specifications	Dimensions
			NPN output	PNP output		
Standard models		Pre-wired (2 m)	E3X-HD11 2M	E3X-HD41 2M	Page 80	Page 80 (80-A)
		Wire-saving Connector	E3X-HD6	E3X-HD8		Page 81 (81-A)
		M8 Connector	E3X-HD14	E3X-HD44		Page 81 (81-B)
Model for Sensor Communications Unit		Connector for Sensor Communications Unit	E3X-HD0			Page 81 (81-C)



## Sensor Communications Unit

Communication method	Appearance	Applicable Fiber Amplifier Model	Models	Ratings and Specifications	Dimensions
CompoNet		E3X-HD0 E3X-MDA0 E3X-DA0-S	<b>E3X-CRT</b>	Page 86	Page 87 <b>(87-A)</b>
EtherCAT			<b>E3X-ECT</b>		Page 87 <b>(87-B)</b>

## Accessories (sold separately)



### Wire-saving connectors (Required for models for Wire-saving Connectors.)

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately. \* Protective stickers: provided.

Type	Appearance	Cable length	Number of conductors	Models	Ratings and Specifications	Dimensions
Master Connector		2m	3	<b>E3X-CN11</b>	Page 88	Page 88 <b>(88-A)</b>
Slave Connector			1	<b>E3X-CN12</b>		Page 88 <b>(88-B)</b>


### Sensor I/O Connectors (Required for models with M8 Connectors.)

Connectors are not provided with the Fiber Amplifier Unit and must be ordered separately. \* Protective stickers: provided.

Appearance	Cable length	Number of conductors	Models	Ratings and Specifications	Dimensions
Straight 	2m	4	<b>XS3F-M421-402-A</b>	Page 88	Page 88 <b>(88-C)</b>
	5m		<b>XS3F-M421-405-A</b>		
L-shaped 	2m		<b>XS3F-M422-402-A</b>		Page 88 <b>(88-D)</b>
	5m		<b>XS3F-M422-405-A</b>		


### Mounting Bracket

A Mounting Bracket is not provided with the Fiber Amplifier Unit and must be ordered separately as required.

Appearance	Model	Quantity	Dimensions
	<b>E39-L143</b>	1	Page 89 <b>(89-A)</b>

### DIN Track


A Din Track is not provided with the Fiber Amplifier Unit and must be ordered separately as required.

Appearance	Type	Models	Quantity	Dimensions
	Shallow type, total length: 1 m	<b>PFP-100N</b>	1	Page 89 <b>(89-B)</b>
	Shallow type, total length: 0.5 m	<b>PFP-50N</b>		
	Deep type, total length: 1 m	<b>PFP-100N2</b>		Page 89 <b>(89-C)</b>

### End Plate

Two End Plates are provided with the Sensor Communications Unit.

End Plates are not provided with the Fiber Amplifier Unit and must be ordered separately as required.

Appearance	Model	Quantity	Dimensions
	<b>PFP-M</b>	1	Page 89 <b>(89-D)</b>

## Ratings and Specifications

		Type	Standard			Model for Sensor Communications Unit *1
		NPN output	E3X-HD11	E3X-HD6	E3X-HD14	E3X-HD0
		PNP output	E3X-HD41	E3X-HD8	E3X-HD44	
Item	Connecting method		Pre-wired	Wire-saving Connector *2	M8 Connector	Connector for Sensor Communications Unit
Light source (wavelength)		Red, 4-element LED (625 nm)				
Power supply voltage		12 to 24 VDC ±10%, ripple (P-P) 10% max.				Supplied from the connector through the Sensor Communications Unit
Power consumption	Normal mode	720 mW max. (Current consumption: 30 mA max. at 24 VDC, 60 mA max. at 12 DVC)				
	Eco ON	530 mW max. (Current consumption: 22 mA max. at 24 VDC, 44 mA max. at 12 VDC)				
	Eco LO	640 mW max. (Current consumption: 26 mA max. at 24 VDC, 53 mA max. at 12 VDC)				
Control output		Load power supply voltage: 26.4 VDC max., open-collector output Load current: Groups of 1 to 3 Amplifier Units: 100mA max., Groups of 4 to 16 Amplifier Units: 20mA max. Residual voltage: At load current of less than 10 mA: 1 V max., At load current of 10 to 100 mA: 2 V max. OFF current: 0.1mA max.				—
Protection circuits		Power supply reverse polarity protection, output short-circuit protection and output reverse polarity protection				Power supply reverse polarity protection and output short-circuit protection
Response time	Super-high-speed mode (SHS) *4	NPN outputs: Operate or reset: 50 μs PNP outputs: Operate or reset: 55 μs				—
	High-speed mode (HS)	Operate or reset: 250 μs (default setting)				
	Standard mode (Std)	Operate or reset: 1 ms				
	Giga-power mode (GIGA)	Operate or reset: 16 ms				
Maximum connectable Units		16 units				with E3X-CRT: 16 units with E3X-ECT: 30 units *3
Mutual interference prevention		Possible for up to 10 units (optical communications sync) *4				
Auto power control (APC)		Always ON				
Other functions		Power tuning, differential detection, DPC, timer (OFF-delay, ON-delay, or one-shot), zero reset, resetting settings, and Eco mode				
Ambient Illumination (Receiver side)		Incandescent lamp: 20,000 lx max., Sunlight: 30,000 lx max.				
Ambient temperature range		Operating: Groups of 1 to 2 Amplifier Units: -25 to 55°C, Groups of 3 to 10 Amplifier Units: -25 to 50°C, Groups of 11 to 16 Amplifier Units: -25 to 45°C Storage: -30 to 70°C (with no icing or condensation)				Operating: Groups of 1 to 2 Amplifier Units: 0 to 55°C, Groups of 3 to 10 Amplifier Units: 0 to 50°C, Groups of 11 to 16 Amplifier Units: 0 to 45°C, Groups of 17 to 30 Amplifier Units: 0 to 40°C Storage: -30 to 70°C (with no icing or condensation)
Ambient humidity range		Operating and storage: 35% to 85% (with no condensation)				
Insulation resistance		20 MΩ min. (at 500 VDC)				
Dielectric strength		1,000 VAC at 50/60 Hz for 1 min				
Vibration resistance (destruction)		10 to 55 Hz with a 1.5-mm double amplitude for 2 hours each in X, Y, and Z directions				10 to 150 Hz with a 0.7-mm double amplitude for 80 minutes each in X, Y, and Z directions
Shock resistance (destruction)		500 m/s² for 3 times each in X, Y, and Z directions				150 m/s² for 3 times each in X, Y, and Z directions
Degree of protection		IEC 60529 IP50 (with Protective Cover attached)				—
Weight (packed state/unit only)		Approx. 105 g/Approx. 65 g	Approx. 60 g/Approx. 20 g	Approx. 70 g/Approx. 25 g	Approx. 65 g/Approx. 25 g	
Materials	Case	Polycarbonate (PC)				Heat-resistant ABS (connector: PBT)
	Cover	Polycarbonate (PC)				
Accessories		Instruction Manual				

\*1. The E3X-ECT EtherCAT Sensor Communications Unit and the E3X-CRT CompoNet Sensor Communications Unit can be used.

\*2. Use either the E3X-CN11 (master connector, 3 conductors) or the E3X-CN12 (slave connector, 1 conductor).

\*3. When connected to an OMRON NJ-series Controller.

\*4. The communications function and mutual interference prevention function are disabled when the detection mode is set to Super-high-speed mode (SHS).

When including E3X-DA-S with activated power tuning the maximum number of mutual interference prevention is up to 6.

When including E3X-MDA with activated power tuning the maximum number of mutual interference prevention is up to 5.


(Unit: mm)

## Dimensions


Tolerance class IT16 applies to demmensions in this date sheet unless otherwise specified.

## Pre-wired Amplifier Units


**(80-A)** E3X-HD11  
E3X-HD41

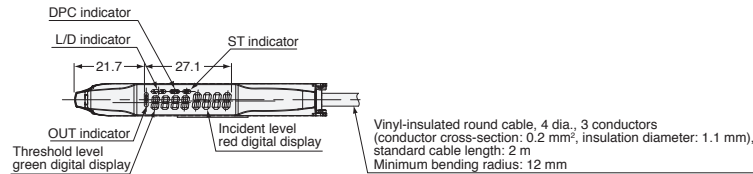


## DIN track mounting

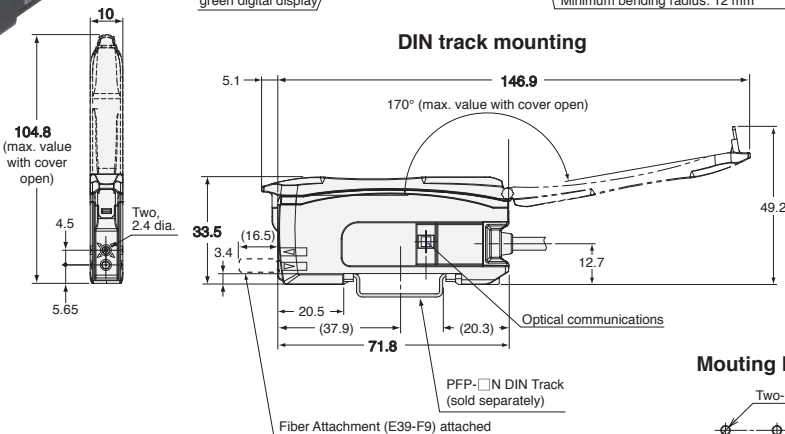

## With Mounting Bracket Attached


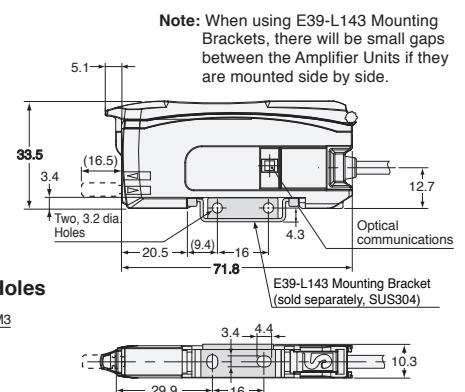


## Mounting Holes




### Amplifier Units with Wire-saving Connectors

**(81-A)** E3X-HD6  
E3X-HD8

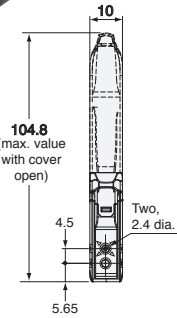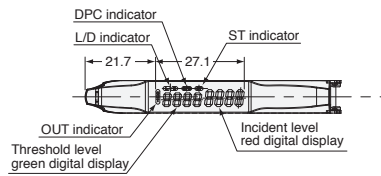


#### DIN track mounting

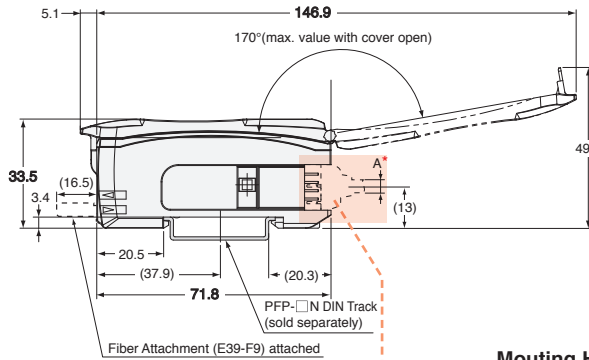


#### With Mounting Bracket Attached

**Note:** When using E39-L143 Mounting Brackets, there will be small gaps between the Amplifier Units if they are mounted side by side.

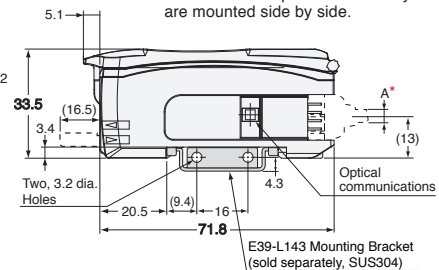

#### Mouting Holes




\* The cable diameters are as follows:

E3X-CN11 (3 conductors)	4.0 dia.
E3X-CN12 (1 conductor)	2.6 dia.

### Amplifier Units with M8 Connectors


**(81-B)** E3X-HD14  
E3X-HD44




The dimensions are the same as the E3X-HD6/8, except for the connector.

### Amplifier Unit with Connector for Sensor Communications Unit

**(81-C)** E3X-HD0

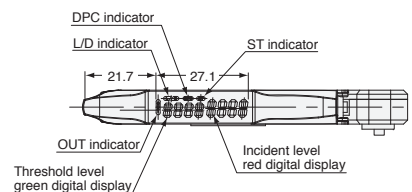

#### DIN track mounting

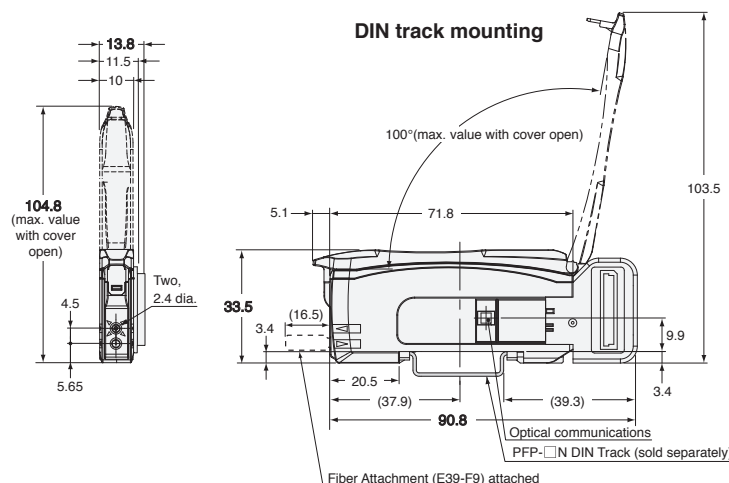

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflective

Limited-  
reflective

Chemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistant

Area  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

Installation  
Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

Threaded  
CylindricalFlat  
SleevedSmall Spot  
High Power  
Narrow view  
BGSRetro-reflective  
Limited-reflectiveChemical-resistant,  
Oil-resistant  
Bending  
Heat-resistantArea  
Detection  
Liquid-level  
Vacuum  
FPD,  
Semi,  
Solar

## I/O Circuit Diagrams

## NPN Output

Models	Operation mode	Timing chart	L/D indicators	Output circuit
E3X-HD11 E3X-HD6 E3X-HD14	Light-ON	Incident light: [ON] No incident light: [OFF] OUT indicator (orange): Lit Not lit Output transistor: ON OFF Load (e.g., relay): Set Reset (Between brown and black leads)	L lit.	
	Dark-ON	Incident light: [OFF] No incident light: [ON] OUT indicator (orange): Not lit Lit Output transistor: OFF ON Load (e.g., relay): Set Reset (Between brown and black leads)	D lit.	


## PNP Output

Models	Operation mode	Timing chart	L/D indicators	Output circuit
E3X-HD41 E3X-HD8 E3X-HD44	Light-ON	Incident light: [ON] No incident light: [OFF] OUT indicator (orange): Lit Not lit Output transistor: ON OFF Load (e.g., relay): Set Reset (Between blue and black leads)	L lit.	
	Dark-ON	Incident light: [OFF] No incident light: [ON] OUT indicator (orange): Not lit Lit Output transistor: OFF ON Load (e.g., relay): Set Reset (Between blue and black leads)	D lit.	

ON delay	OFF delay	One-shot
Incident light: [ON] No incident light: [OFF] Light-ON: ON OFF Dark-ON: ON OFF	Incident light: [ON] No incident light: [OFF] Light-ON: ON OFF Dark-ON: ON OFF	Incident light: [ON] No incident light: [OFF] Light-ON: ON OFF Dark-ON: ON OFF

Note: Timing Charts for Timer Settings (T: Set Time)

## Plug (Sensor I/O Connector)

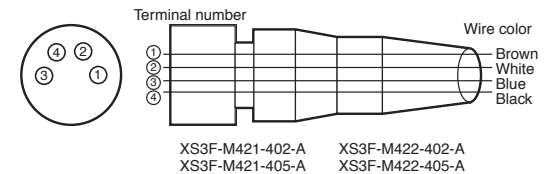

Wire color	Connection pin	Application
Brown	1	Power supply (+V)
White	2	---
Blue	3	Power supply (0 V)
Black	4	Output

Note: Pin 2 is not used.

## Nomenclature

## [L/D Indicator]

Indicates the setting status:  
Light-ON (L) or Dark-ON (D).

## [DPC Indicator]

Turns ON when Dynamic Power Control  
is effective.

## [△L/D Button]

Use to switch between  
Light-ON (L) and Dark-ON (D).

## [OUT Indicator]

Turns ON when the output is ON.

## [ST Indicator]

Turns ON when Smart Tuning  
is in progress.Threshold Level  
Green digital displayIncident Level  
Red digital display[MODE Button]  
Use to switch between Detection  
Mode and Setting Mode.

## [TUNE Button]

Automatically sets the emitter  
power and set values.

## [+UP/DOWN Button]

Used to fine-tune the threshold  
or change set values.


## Operating Procedures

## Basic Settings


## Output switching


1. Press  button.

Through-beam:

Set to "Dark ON" to turn the output ON with a workpiece in the detection area. [L/D Indicator] turns  ON.

Reflective:


Set to "Light ON" to turn the output ON with a workpiece in the detection area. [L/D Indicator] turns  ON.

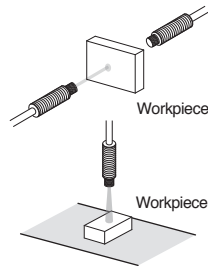


## Smart Tuning [Easy Sensitivity Setting]

## (1) Detect for Workpiece Presence/Absence

## • 2-point Tuning

1. Press  button with a workpiece in the detection area.

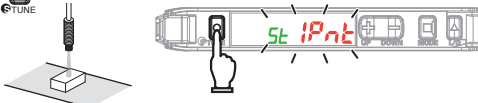

2. Press  button again without a workpiece in the detection area.





Incident light level setting:  
The larger incident level of the Step 1 and 2 values is adjusted to the power tuning level.  
Threshold setting: Set to the middle between the Step 1 and 2 incident light levels.




Step 1 and Step 2 can be reversed.

## (2) Enhance Durability of the Fiber Head against Dust and Stain

## • Maximum Sensitivity Tuning

1. Hold  button for 3 seconds or longer with/without workpiece as shown below.  
Release the button when [  FULL ] is displayed.  
Through-beam: Workpiece is present

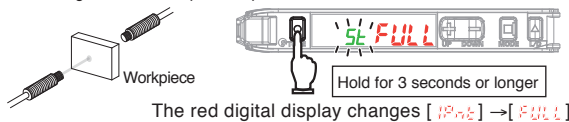








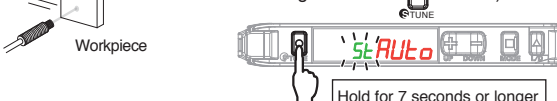
Reflective: Workpiece is absent

Incident light level setting:  
The incident level in Step 1 is adjusted to "0".  
Threshold setting:  
The value is set to approx. 7% of the incident light level of 1.  
If the incident light level of 1 is smaller during long distance detection, the minimum value by which an output is correctly turned ON will be set.

## (3) Adjust for Moving Workpiece without Stopping Line

## • Full Auto Tuning

1. Hold the  button without the presence of a workpiece, and pass the workpiece through while [  IPnt ] → [  FULL ] → [  AUTO ] is displayed in red digital. (Keep holding the  button while the workpiece passes through, and hold 7 seconds or longer until [  AUTO ] is displayed in red digital. After the workpiece passes through, release your finger from the  button.)




Incident light level setting:  
Adjust the max. incident light level on Step 1 as the power tuning level.  
Threshold setting:  
Set to the middle between max. and min. incident light levels on Step 1.


## (4) Determine Workpiece Position



## • Position Tuning

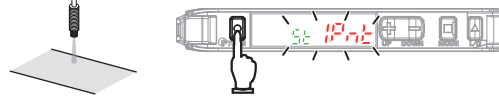1. Press  button without a workpiece in the area.

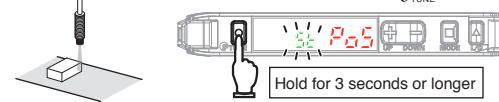

2. Place the workpiece at the desired position and hold  button.



The red digital display changes [  2Pnt ] → [  2Pnt ].

➔ Setting is Completed

Incident light level setting:

The Step 2 incident level is adjusted to half the power tuning level.  
Threshold setting: Set to the same value as the Step 2 incident light level.


(5) Detect Transparent or Small Workpiece  
(Set Threshold by incident light level percentage)

## • Percentage Tuning

1. Turn ON Percentage Tuning in SET mode.

Refer to  
"Detailed Settings".

2. Press  button without a workpiece in the area.

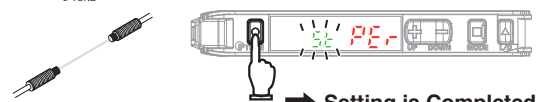




Incident light level setting:

The Step 2 incident light level is adjusted to the power tuning level.  
Threshold setting: Set to the value obtained by [Incident Level at Step 2 × Percentage Tuning Level + Incident Level at Step 2].



No Smart Tuning other than Power Tuning can be used if Percentage Tuning is set.

## • Smart Tuning Error

Error / Display / Cause	Error Origin Tuning Type	Remedy
<b>Near Error</b>  The light level difference between Points 1 and 2 are extremely small.	2-point Tuning Full Auto Tuning Positioning Tuning	<ul style="list-style-type: none"> <li>Change the detection function mode to a slower response time mode.</li> <li>Reduce the distance between the light emitting and light receiving surfaces. (Through-beam)</li> <li>Place the Fiber Head closer to the sensing object. (Reflective)</li> </ul>
<b>Over Error</b>  Incident light level is too high.	All	<ul style="list-style-type: none"> <li>Enhance the power tuning level.</li> <li>Use a thin-diameter fiber.</li> <li>Widen the emitter and receiver distance. (Through-beam)</li> <li>Distance the Fiber Head from the sensing object. (Reflective)</li> </ul>
<b>Low Error</b>  Incident light level is too low.	Tuning other than Maximum Sensitivity Tuning	<ul style="list-style-type: none"> <li>Decrease the power tuning level.</li> <li>Reduce the distance between the light emitting and light receiving surfaces. (Through-beam)</li> <li>Place the Fiber Head closer to the sensing object. (Reflective)</li> </ul>




The adjustment range of smart tuning is approx. 20 to 1/100 times.  
When selecting giga mode as detection function, the range will be approx. 2 to 1/100 times due to the large initial value.



Refer to "Detailed Settings" to change the power tuning level.

## Minute Adjustment of Threshold Level

1. Press  button to adjust the threshold level.

The threshold level becomes higher.

The threshold level becomes lower.



Hold the key for high-speed level adjustment.

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflectiveLimited-  
reflectiveChemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistantArea  
Detection

Liquid-level

Vacuum


FPD,  
Semi,  
Solar

## Convenient Setting Features

## (1) Restore from the Incident Level Changed due to Dust and Dirt

## ● Power Tuning

1. Hold and buttons for 1 second or longer without a workpiece in the area.

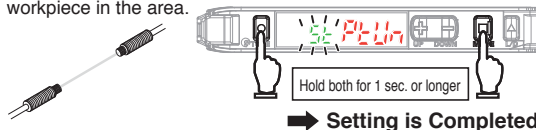

Incident light level setting:  
The Step 1 incident level is adjusted to the power tuning level.  
Threshold setting:  
Not changed. If the value is low, it will be set to the minimum value in which an output is turned ON/OFF correctly.



Perform the procedure with a workpiece in the area for reflective model setting. If the setting is made after position tuning, set both the through-beam model and reflective model with a workpiece.



Refer to "Smart Tuning Error" for error displays.

## (2) Stable Detection Regardless of Incident Level Change due to Dust and Dirt

## ● DPC Function (Use of the function with Through-beam model or Retro-reflective model is recommended)

1. Perform Smart Tuning.




Refer to "Smart Tuning"  
Refer to "Power Tuning"

The DPC indicator turns ON when the DPC function is effective.


2. Set the DPC function ON in SET mode.



Refer to "Detailed Settings".



- Steps 1 and 2 can be reversed.
- The DPC function will be disabled when a smart tuning error occurs, differential function with maximum sensitivity tuning is performed, or the first incident light level of the positioning tuning is low.
- The incident light level is corrected to the power tuning level to maintain stable threshold and incident light levels. This provides stable detection regardless of the incident level changes caused by dirty sensor head, position error, or temperature changes.

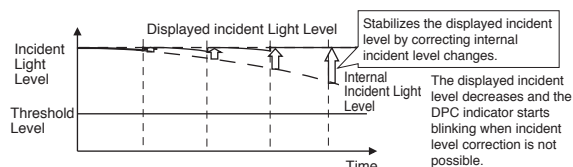


## (3) Reset Settings

## ● Setting Reset

Initializes all the settings by returning them to the factory defaults.

1. Hold button and then hold button for 3 seconds or longer.



2. Select [] in and press button.
3. Select [] in and press button.

Item	Initial Value
Threshold Value	55
Control Output	L-ON

\* Settings for other functions are returned to the detailed setting initial values. User-saved settings are retained. Smart Tuning is canceled.



Caution is required; the output is inverted if button is pressed first.

## (4) Save or Read Settings

1. Hold button and then hold button for 3 seconds or longer.

## ● User Save Function

Saves the current settings.

2. Select [] in and press button.

3. Select [] in and press button.

## ● User Reset Function

Reads out the saved settings.

2. Select [] in and press button.

3. Select [] in and press button.




Caution is required; the output is inverted if button is pressed first.

## (5) Prevent Mistake-operation

## ● Key Lock Function

Disables all button operations. [] is displayed when the button is pressed.

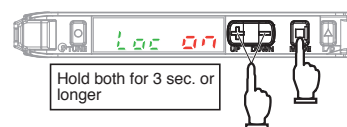■ Enable/Cancel  
(This procedure)


\* Press either of UP/DOWN.

## (6) Reset Incident Light Level to "0"


## ● Zero Reset Function

Changes the incident light level to "0". The threshold level is also shifted accordingly.

## ■ Enable

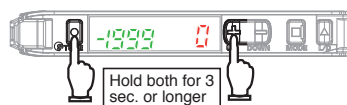


## ■ Cancel

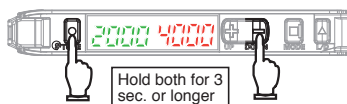










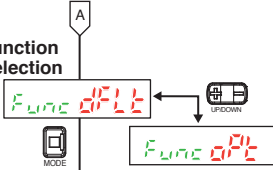






























The zero reset function is canceled when either of the DPC function/differential function/Smart Tuning is performed.

### Detailed Settings

Hold  button for 3 seconds or longer to enter SET mode.

SET mode provides the function settings described hereafter. The initial display shown after transition from one function to another represents the factory default.

Function Setting	Description															
<b>1. Function Selection</b> 	<b>Changing Functions to Set in SET Mode</b> [dFlt]: Functions 1. to 5. can be set [dPlt]: Functions 1. to 10. can be set.															
<b>2. Detection Function</b> (Incident Light Level Example) (a)  (b)  (c)  (d) 	<b>Changing Light Level and Response Time</b> <table border="1"> <thead> <tr> <th>Detection Function</th> <th>Response Time</th> <th>Light Level</th> </tr> </thead> <tbody> <tr> <td>HS High-speed mode</td> <td>250 <math>\mu</math>s</td> <td>1 (Standard)</td> </tr> <tr> <td>STND Standard mode</td> <td>1 ms</td> <td>1 time</td> </tr> <tr> <td>GIGA Giga mode</td> <td>16 ms</td> <td>12 times</td> </tr> <tr> <td>SHS Super-high-speed mode*</td> <td>NPN 50 <math>\mu</math>s PNP 55 <math>\mu</math>s</td> <td>0.25 times</td> </tr> </tbody> </table> <p>Smart Tuning is canceled if the detection mode is changed.</p> <p>* The communication and mutual interference prevention functions are disabled when the detection mode is set to super-high-speed mode.</p> <p> <b>CHECK!</b> The incident light level in SET mode is a reference value. It may be changed when switched to detection mode.</p>	Detection Function	Response Time	Light Level	HS High-speed mode	250 $\mu$ s	1 (Standard)	STND Standard mode	1 ms	1 time	GIGA Giga mode	16 ms	12 times	SHS Super-high-speed mode*	NPN 50 $\mu$ s PNP 55 $\mu$ s	0.25 times
Detection Function	Response Time	Light Level														
HS High-speed mode	250 $\mu$ s	1 (Standard)														
STND Standard mode	1 ms	1 time														
GIGA Giga mode	16 ms	12 times														
SHS Super-high-speed mode*	NPN 50 $\mu$ s PNP 55 $\mu$ s	0.25 times														
<b>3. DPC Function</b> 	<b>Stable Detection Regardless of Incident Light Level Change</b>  Refer to "Convenient Setting Features"															
<b>4. Timer Function</b>  (a)  (b)  (c) 	<b>Setting Output Timer</b> <p><b>Off-delay Timer</b> Holds the output ON for detection by PLC when the detection time is too short.</p> <p><b>On-delay Timer</b> Delays the output ON after detection.</p> <p><b>One-shot Timer</b> Keeps the output ON for a specified time regardless of the workpiece size variations.</p> <p>A timer value can be set after pressing  button when a timer menu (other display than "---") is displayed.</p> <p>Use  button to set the time. (1 to 9999 ms in 1 ms steps; the initial value: 10 ms)</p>															
<b>5. Power Tuning Level</b> 	<b>Changing the Target Incident Light Level (Power Tuning Level)</b> Use  button to set the power tuning level. [999] to 9999 in 1 steps; the initial value: 9999  Refer to "Convenient Setting Features"															
<b>6. Percentage Tuning</b>  	<b>Detecting Transparent or Small Workpiece</b> Press  button in [PEr dOn] menu, then use  button to set the percentage tuning level. (-99% to 99% in 1% steps; the initial value: -10%)  Refer to "Smart Tuning"															

Function Setting	Description																																	
<b>7. Differential Function</b>      	<b>Detecting Incident Light Level Change</b> Detects if the absolute value of the incident light level change of the set response time is larger than the threshold value. The display shows the change of the incident light level of the set response time in red. <table border="1"> <thead> <tr> <th>Differential Setting</th> <th>Response Time</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>250 <math>\mu</math>s</td> </tr> <tr> <td>2</td> <td>500 <math>\mu</math>s</td> </tr> <tr> <td>3</td> <td>1 ms</td> </tr> <tr> <td>4</td> <td>10 ms</td> </tr> <tr> <td>5</td> <td>100 ms</td> </tr> </tbody> </table> <p>Use  button to specify the response time.</p> <p>When the differential function is enabled, the detection function setting is disabled.</p> <p>Smart tunings except power tuning are disabled.</p> <p>The adjustment range of power tuning is approx. 1 to 1/100 times.</p>	Differential Setting	Response Time	1	250 $\mu$ s	2	500 $\mu$ s	3	1 ms	4	10 ms	5	100 ms																					
Differential Setting	Response Time																																	
1	250 $\mu$ s																																	
2	500 $\mu$ s																																	
3	1 ms																																	
4	10 ms																																	
5	100 ms																																	
<b>8. Digital Display</b>  (a)  (b)  (c)  (d)  (e) 	<b>Changing Digital Display in RUN Mode for Specific Purpose</b> <p><b>Checking a Margin Against Threshold</b></p> <table border="1"> <thead> <tr> <th>Threshold</th> <th>Light Level Ratio</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>2000</td> <td>1500</td> <td>The ratio of the incident light level to the threshold is displayed in red digital figures.</td> </tr> </tbody> </table> <p><b>Setting Threshold using a Small or Fast Moving Workpiece</b></p> <table border="1"> <thead> <tr> <th>Peak Light Level</th> <th>Bottom Light Level</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>8000</td> <td>2000</td> <td>Holds and displays the minimum value of the peak of the light incident and the maximum value of the bottom of the light interruption.</td> </tr> </tbody> </table> <p><b>Setting for Intuitive Analog Display</b></p> <table border="1"> <thead> <tr> <th>Threshold</th> <th>120%</th> <th>100%</th> <th>80%</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>120%</td> <td>100%</td> <td>80%</td> <td>Displays the current level in the 80 to 120% range against the threshold value (100%).</td> </tr> </tbody> </table> <p><b>Adjusting Optical Axis</b></p> <table border="1"> <thead> <tr> <th>Peak Light Level</th> <th>Light Level</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>3500</td> <td>3000</td> <td>Holds the peak incident light level and displays it in green digital figures.</td> </tr> </tbody> </table> <p><b>Checking the Channel No. in Group Mounting</b></p> <table border="1"> <thead> <tr> <th>Ch. No.</th> <th>Light Level</th> <th>Description</th> </tr> </thead> <tbody> <tr> <td>124</td> <td>3000</td> <td>Checking the Channel No. in Group Mounting.</td> </tr> </tbody> </table>	Threshold	Light Level Ratio	Description	2000	1500	The ratio of the incident light level to the threshold is displayed in red digital figures.	Peak Light Level	Bottom Light Level	Description	8000	2000	Holds and displays the minimum value of the peak of the light incident and the maximum value of the bottom of the light interruption.	Threshold	120%	100%	80%	Description	120%	100%	80%	Displays the current level in the 80 to 120% range against the threshold value (100%).	Peak Light Level	Light Level	Description	3500	3000	Holds the peak incident light level and displays it in green digital figures.	Ch. No.	Light Level	Description	124	3000	Checking the Channel No. in Group Mounting.
Threshold	Light Level Ratio	Description																																
2000	1500	The ratio of the incident light level to the threshold is displayed in red digital figures.																																
Peak Light Level	Bottom Light Level	Description																																
8000	2000	Holds and displays the minimum value of the peak of the light incident and the maximum value of the bottom of the light interruption.																																
Threshold	120%	100%	80%	Description																														
120%	100%	80%	Displays the current level in the 80 to 120% range against the threshold value (100%).																															
Peak Light Level	Light Level	Description																																
3500	3000	Holds the peak incident light level and displays it in green digital figures.																																
Ch. No.	Light Level	Description																																
124	3000	Checking the Channel No. in Group Mounting.																																
<b>9. Inverted Display</b>  	<b>Mounting Amplifier in Inverted Direction</b> Inverts the display upside down. The digital display shows the threshold value in red, and light incident level in green.																																	
<b>10. Eco Function</b>   	<b>Saving Power Consumption</b> Eco on Indicators (Green and Red digital displays) turn OFF in approx. 10 seconds after a key operation. Eco Lo Indicators (Green and Red digital displays) turn ON with low brightness in approx. 10 seconds after a key operation.																																	

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflective

Limited-  
reflective

Chemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistant

Area  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

Ratings and Specifications

E3X-CRT

Item	Specifications
Communication method	CompoNet Communications
Connectable Sensors	Fiber Sensors: E3X-HD0, E3X-MDA0 and E3X-DA0-S Laser Sensor Head with Separate Digital Amplifier: E3C-LDA0 Proximity Sensor with Separate Amplifier: E2C-EDA0
Communications power supply voltage	14 to 26.4 VDC (Communications Unit draws power from the communications power supply.)
Power and current consumption	2.4 W max. (Not including the power supplied to Sensor.) 100 mA max. at 24 VDC (Not including the current supplied to Sensor.)
Functions	I/O communications, message communications, and Sensor error output
Indicators	MS Indicator (Green/Red), NS indicator (Green/Red), and SS (Sensor Status) indicator (Green/Red)
Vibration resistance	10 to 150 Hz with double amplitude of 0.7 mm, or 50 m/s <sup>2</sup> 80 min each in X, Y, and Z directions
Shock resistance	150 m/s <sup>2</sup> 3 times each in X, Y, and Z directions
Dielectric strength	500 VAC 50/60Hz 1 min
Insulation resistance	20MΩ min.
Ambient operating temperature	0 to 55°C (with no icing or condensation) * The temperature is limited by the number of connected Fiber Amplifier Units.
Ambient operating humidity	25% to 85% (with no icing or condensation)
Storage temperature	−30 to 70°C (with no icing or condensation)
Storage humidity	25% to 85% (with no condensation)
Mounting method	35-mm DIN track-mounting
Weight (packed state/unit only)	Approx. 220 g/Approx. 95 g
Accessories	Connector cover, DIN track End Plates and Instruction manual

**Note.** The E3X-CRT has two operating modes: I/O mode 1 and I/O mode 2.  
The following table gives the differences between these modes.

	I/O classification	Number of allocated points	Maximum number of interconnected
I/O mode 1	Input Unit	Input: 32	15
I/O mode 2	I/O Unit	Input: 64 Output: 64	16

\* Temperature Limitations Based on Number of Connected Fiber Amplifier Units:  
Groups of 1 to 2 Amplifier Units: 0 to 55°C,  
Groups of 3 to 10 Amplifier Units: 0 to 50°C,  
Groups of 11 to 16 Amplifier Units: 0 to 45°C

Read the User's Manual for precautions  
on using this Unit. (E412)

E3X-ECT

Item	Specifications
Communication method	EtherCAT
Connectable Sensors	Fiber Sensor E3X-HD0, E3X-MDA0 and E3X-DA0-S Laser Sensor Head with Separate Digital Amplifier: E3C-LDA0 Proximity Sensor with Separate Amplifier: E2C-EDA0
Power supply voltage	20.4 to 26.4 VDC
Power and current consumption	2.4 W max. (Not including power the supplied to Sensor.) 100 mA max. at 24 VDC (Not including the current supplied to Sensor.)
Functions	DC (synchronous) mode, Free run mode, PDO communications,* 1 SDO communications, Sensor error output
Indicators	L/A IN indicator (Yellow), L/A OUT indicator (Yellow), PWR indicator (Green), RUN indicator (Green), ERROR indicator (Red), and SS (Sensor Status) indicator (Green/Red)
Vibration resistance	10 to 150 Hz with double amplitude of 0.7 mm, or 50 m/s <sup>2</sup> 80 min each in X, Y, and Z directions
Shock resistance	150 m/s <sup>2</sup> 3 times each in X, Y, and Z directions
Dielectric strength	500 VAC 50/60 Hz 1 min
Insulation resistance	20MΩ min.
Ambient operating temperature	0 to 55°C (with no icing or condensation) * The temperature is limited by the number of connected Fiber Amplifier Units.
Ambient operating humidity	25% to 85% (with no condensation)
Storage temperature	−30 to 70°C (with no icing or condensation)
Storage humidity	25% to 85% (with no condensation)
Mounting method	35-mm DIN track-mounting
Weight (packed state/unit only)	Approx. 220 g/Approx. 95 g
Accessories	Power supply connector, connector cover, DIN track End Plates and Instruction manual

- \*1. Data Size Assignable to the PDO (Process Data Object):  
There is a maximum data size that can be assigned. The maximum size is 36 bytes.
- \*2. Temperature Limitations Based on Number of Connected Fiber Amplifier Units:  
Groups of 1 to 2 Amplifier Units: 0 to 55°C,  
Groups of 3 to 10 Amplifier Units: 0 to 50°C,  
Groups of 11 to 16 Amplifier Units: 0 to 45°C,  
Groups of 17 to 30 Amplifier Units: 0 to 40°C


Read the User's Manual for precautions  
on using this Unit. (E413)

Dimensions


(Unit: mm)

Tolerance class IT16 applies to demmensions in this date sheet unless otherwise specified.

87-A E3X-CRT

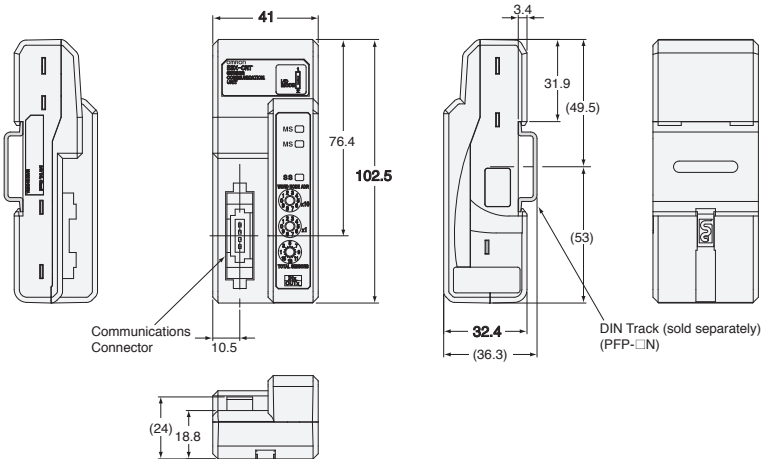

87-B E3X-ECT

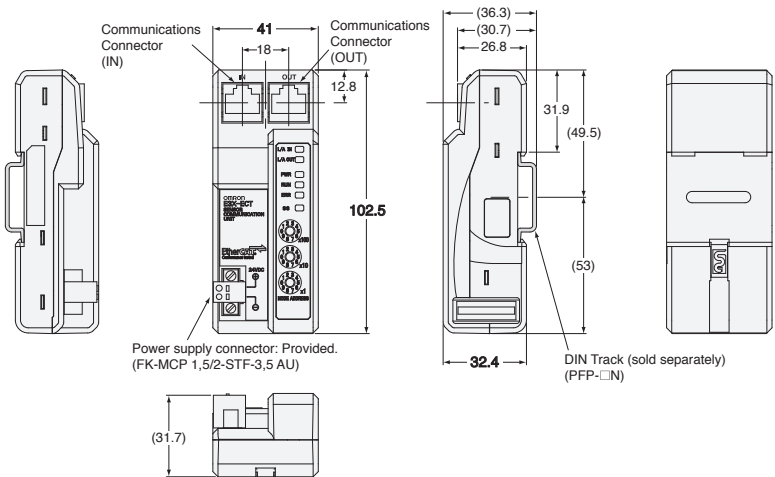

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded	Standard Installation
Cylindrical	
Flat	Saving Space
Sleeved	
Small Spot	Beam Improvements
High Power	
Narrow view	
BGS	Transparent Objects
Retro-reflective	
Limited-reflective	
Chemical-resistant, Oil-resistant	Environmental Immunity
Bending	
Heat-resistant	
Area Detection	Applications
Liquid-level	
Vacuum	
FPD, Semi, Solar	Installation Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

## Ratings and Specifications

## Wire-saving Connectors

Item	Type	Master Connector		Slave Connector	
	Models	E3X-CN21	E3X-CN11	E3X-CN22	E3X-CN12
Number of conductors	4		3	2	1
Diameter of cable	4 dia.				2.6 dia.
Rated current	2.5A				
Rated voltage	50VDC				
Contact resistance	20 mΩ max. (20 mVDC max., 100 mA max.) (The above figure is for connection to the Amplifier Unit and the adjacent Connector. It does not include the conductor resistance of the cable.)				
Number of insertions	Destruction: 50 times (for connection to the Amplifier Unit and the adjacent Connector)				
Material	Housing	Polybutylene terephthalate (PBT)			
	Contact	Phosphor bronze/gold-plated nickel			
Weight (packed state)	Approx. 55 g				Approx. 25 g

## Sensor I/O Connectors


Item	Models	XS3F-M42□-40□-A
Number of conductors		4
Diameter of cable		4 dia.
Rated current		1A
Rated voltage		125VDC
Contact resistance		40 mΩ max. (20 mVDC max., 100 mA max.)
Number of insertions		Destruction: 200 times

## Dimensions



(Unit: mm)  
Tolerance class IT16 applies to demmensions in this date sheet unless otherwise specified.

## Wire-saving Connectors (for Models with Wire-saving Connectors)



## Master Connector

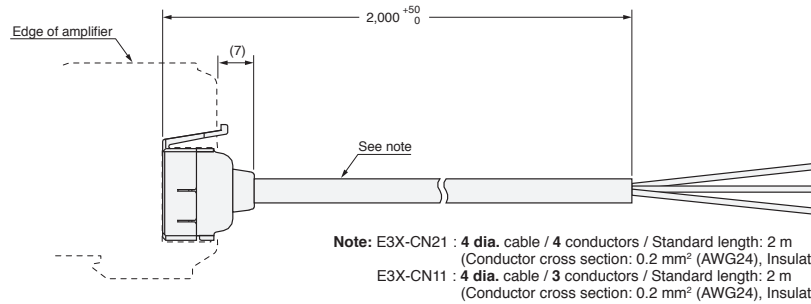(88-A) E3X-CN21  
E3X-CN11

## Slave Connector

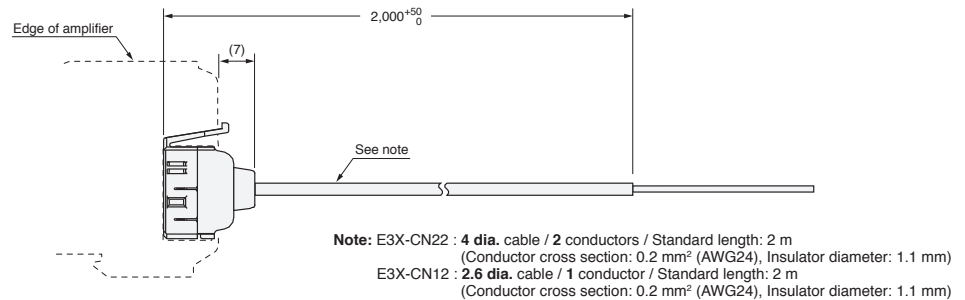

(88-B) E3X-CN22  
E3X-CN12

## Sensor I/O Connectors (for Models with M8 Connectors)

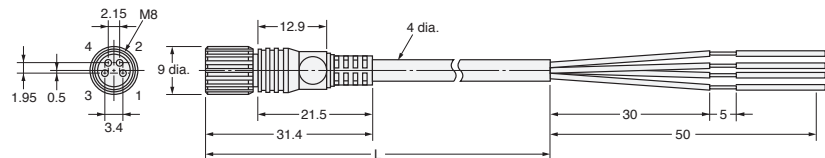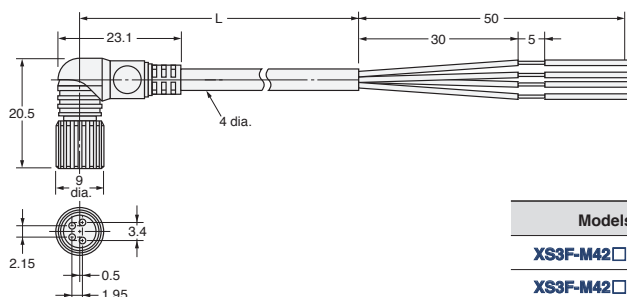(88-C) XS3F-M421-402-A  
XS3F-M421-405-A(88-D) XS3F-M422-402-A  
XS3F-M422-405-A

Models	Cable length L (m)
XS3F-M42□-402-A	2
XS3F-M42□-405-A	5

**89-A** **E39-L143**

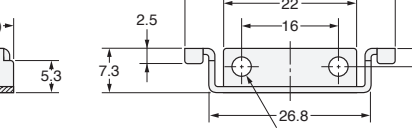

Technical drawings of the 1000 Series 1/2" (Figure 1000-1) showing three views: a side view, a top view, and a front view. The side view shows a profile with a top width of 10.3 and a height of 5.3. The top view shows a rectangular block with overall dimensions of 34.8 by 26.8. It features two circular holes with diameters of 2.5 and 3.0, and a central slot with a width of 22. The front view shows a cross-section with a total width of 16 and a height of 10.3. It includes two circular holes with diameters of 3.4 and 3.0, and a central slot with a width of 1. The front view also shows a four-hole pattern with a diameter of 3.4 and a distance of 16 between the centers of the holes.

**89-B**    **PFP-100N**  
**PFP-50N**




Technical drawing of a metal plate with two sets of three holes. The left set has a 4.5mm hole diameter and 15mm hole spacing. The right set has a 7.3±0.15mm hole diameter and 27±0.15mm hole spacing. A 35±0.3mm wide flange is on the right end. Dimensions are in mm.

Note: The figures in parentheses

**89-C** **PFP-100N2**



**89-D**      **PFP-M**



## Reference Information for Fiber Units


### Influence of Fiber Cable Length

The sensing distance listed in the Fiber Units specifications are based on the fiber cable lengths found in the suffix of the model number. The sensing distance will change if the fiber cable is cut or extended.

The following graph shows the percentage change of the various fiber cable length, where 100% is the sensing distance for a fiber cable with a length of 2 m.

Use this as a guideline for installation distances.

Keep in mind that extending the cable with a fiber connector will result in even shorter sensing distances than the value given in the graph.

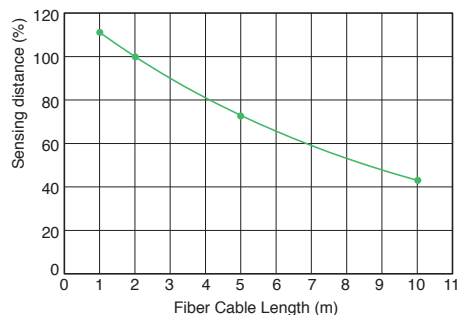


\* The 100% value is for a fiber cable with a length of 2 m (same for Through-beam and Reflective Models).

### Reflective Models: Sensing Distance Ratios by Workpiece Materials

The following graph shows the percentage change of the various workpieces, where 100% is the sensing distance for white paper, the standard sensing object.

Refer to the value of the material that looks like your workpiece.

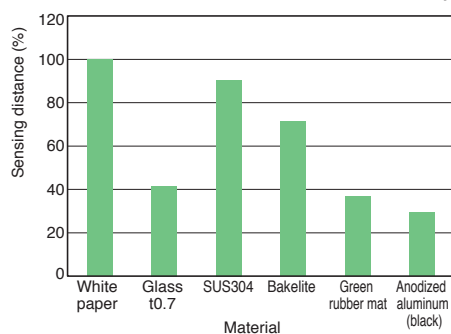

\* White paper is 100%.

### Types of Fiber Cables

This section describes the features of different types of fiber cables.


(This is given in the Fiber Unit specifications as either Flexible or Bend-resistant for the cable bending radius, and Coaxial for the appearance.)

If no definition is given, a standard cable is used.)

#### • Flexible Fibers


The flexible fiber has a small bending radius for easy routing without easily breaking.

It is easy to use because the cable can be bent without significantly reducing light intensity.



#### • Break-resistant Fibers


This fiber is resistant to repeated bends for use on moving parts.

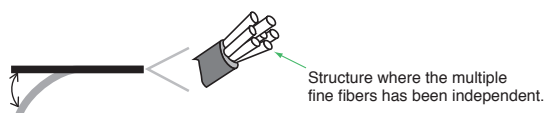

#### • Standard Fibers


This fiber have a large bending radius compared with bend-resistant or flexible fiber.

Use this fiber where the bending radius is large, or on non-moving parts.





#### • Coaxial Reflective Fibers

These fibers are suitable for sensing small objects at close range.

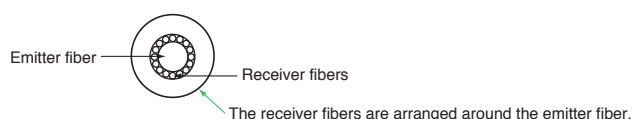

## Q&A

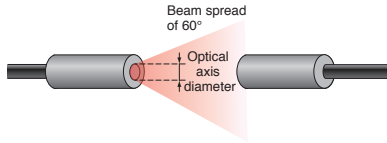Category	Question	Answer
Fiber Units	How do I interpret the optical axis diameter in the Fiber Unit specifications?	<p>The optical axis diameter is the beam size that the Through-beam Fiber Unit uses for detection.</p> <p>If you are detecting objects larger than the optical axis diameter, you can expect stable detection performance because the object will block all of the beams of light that are used for detection.</p> <p>The incident level may fluctuate, however, if the workpiece passes the beam at high speed.</p> <p>In this case, it is best to select a Fiber Unit with a smaller optical axis diameter, or change the response time of the Fiber Amplifier Unit to High-speed mode or to Super-high-speed mode setting.</p> 
	Are there any differences between the Fiber Units that are used for emitter and receiver?	<p>With Through-beam Fiber Units, there is no difference between emitter fibers and receiver fibers.</p> <p>With Reflective Fiber Units, the emitter fibers and receiver fibers are different on Coaxial Reflective Models.</p> <p>Emitter fiber cables have identification marks. Refer to the individual dimensions diagrams of Fiber Units for details.</p>
	What size must the hole be to mount a Threaded or Cylindrical Fiber Unit?	Refer to the recommended mounting hole dimensions given on pages 58 to 61.
	Are Fiber Cables available in different lengths?	Some models are available with either 5-m or 10-m cable. Ask your OMRON representative for details.
	What is the aperture angle?	<p>The aperture angle is the angle at which the emitter beam spreads out.</p> 
	Are these Fiber Units CE certified?	Fiber Units do not have any electrical components and therefore are exempt from CE certification.
	Can these Fiber Units be used in explosionproof areas?	The Fiber Units can be used in an explosion-proof area. Install only the Fiber Unit in the explosion-proof area and install the Fiber Amplifier Unit outside the explosion-proof area.
Fiber Amplifier Units	Can the Fiber Amplifier Units be linked with other models?	The E3X-HD Series can be connected only with the E3X-DA-S and MDA Series.
	Can the Fiber Amplifier Unit be operated from a mobile console?	Mobile consoles cannot be used with either the E3NX-FA Series or the E3X-HD Series.
	Can a Sensor Communications Unit be used?	<p>If you use E3NX-FA0 Amplifier Units, you can use the E3NW-ECT(EtherCAT), E3NW-CRT(CompoNet) or E3NW-CCL(CC-Link).</p> <p>If you use E3X-HD0 Amplifier Units, you can use the E3X-CRT(CompoNet) or E3X-ECT(EtherCAT).</p>

For common precautions, refer to [www.ia.omron.com](http://www.ia.omron.com)

## Fiber Amplifier Unit

### Warning

**This product is not designed or rated for ensuring safety of persons either directly or indirectly.**

**Do not use it for such purposes.**



**Do not use the product with voltage in excess of the rated voltage.**

**Excess voltage may result in malfunction or fire.**



**Never use the product with AC power supply. Otherwise, explosion may result.**



### Precautions for Safe Use


The following precautions must be observed to ensure safe operation of the product. Doing so may cause damage or fire.

- (1) Do not install the product in the following locations.
  - Locations subject to direct sunlight
  - Locations subject to condensation due to high humidity
  - Locations subject to corrosive gas
  - Locations subject to vibration or mechanical shocks exceeding the rated values
  - Locations subject to exposure to water, oil, chemicals
  - Locations subject to stream
  - Locations subjected to strong magnetic field or electric field
- (2) Do not use the product in environments subject to flammable or explosive gases.
- (3) Do not use the product in any atmosphere or environment that exceeds the ratings.
- (4) To secure the safety of operation and maintenance, do not install the product close to high-voltage devices and power devices.
- (5) High-Voltage lines and power lines must be wired separately from this product. Wiring them together or placing them in the same duct may cause induction, resulting in malfunction or damage.
- (6) Do not apply load exceeding the ratings. Otherwise, damage or fire may result.
- (7) Do not short the load. Otherwise, damage or fire may result.
- (8) Connect the load correctly.
- (9) Do not miswire such as the polarity of the power supply.
- (10) Do not use the product if the case is damaged.
- (11) Burn injury may occur. The product surface temperature rises depending on application conditions, such as the ambient temperature and the power supply voltage. Attention must be paid during operation or cleaning.
- (12) When setting the Sensor, be sure to check safety, such as by stopping the equipment.
- (13) Be sure to turn off the power supply before connecting or disconnecting wires.
- (14) Do not attempt to disassemble, repair, or modify the product Unit in any way.
- (15) When disposing of the product, treat it as industrial waste.
- (16) Do not use the Sensor in water, rain, or outdoors.


### Precautions for Correct Use

- (1) Be sure to mount the unit to the DIN track until it clicks.
- (2) When using Amplifier Units with Wire-saving Connectors, attach the protective stickers (provided with E3X-CN-series Connectors) on the unused power pins to prevent electrical shock and short circuiting. When using Amplifier Units with Connectors for Communications Units, attach the protective caps (provided with Sensor Communications Unit).

Amplifier Unit with Wire-saving Connector

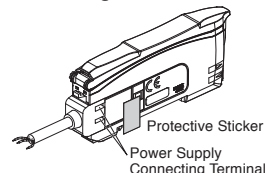

Amplifier Unit with Connector for Communications Unit




- (3) Use an extension cable with a minimum thickness of 0.3 mm<sup>2</sup> and less than 100 m long.
- (4) Do not apply the forces on the cord exceeding the following limits: Pull: 40N; torque: 0.1N·m; pressure: 20N; bending: 29.4N
- (5) Do not apply excessive force such as tension, compression or torsion to the Amplifier Unit with the Fiber Unit fixed to the Amplifier Unit.
- (6) Always keep the protective cover in place when using the Amplifier Unit. Not doing so may cause malfunction.
- (7) It may take time until the received light intensity and measured value become stable immediately after the power is turned on depending on use environment.
- (8) The product is ready to operate 200 ms after the power supply is turned ON.
- (9) The Mobile Console E3X-MC11, E3X-MC11-SV2 and E3X-MC11-S cannot be connected.
- (10) Mutual interference prevention on the E3NX-FA Series does not function among the E3X-HD, E3X-DA-S, E3X-DA-N, E3X-SD, or E3X-NA Fiber Amplifier Units.  
Mutual interference prevention on the E3X-HD Series does not function among the E3NX-FA, E3X-DA-N, E3X-SD, or E3X-NA Fiber Amplifier Units.  
Mutual interference prevention on the E3X-HD Series does function among the E3X-DA-S and E3X-MDA Fiber Amplifier Units.
- (11) If the unit receives excessive sensor light, the mutual interference prevention function may not work properly, resulting in malfunction of the unit. In such case, increase the threshold.
- (12) The E3NW-ECT Sensor Communications Unit can be used with the E3NX-FA0, but the E3X-DRT21-S, E3X-CRT, and E3X-ECT Sensor Communications Units cannot be used. The E3X-CRT and E3X-ECT Sensor Communications Unit can be used with the E3X-HD0, but the E3X-DRT21-S and E3NW-ECT Sensor Communications Units cannot be used.
- (13) If you notice an abnormal condition such as a strange odor, extreme heating of the unit, or smoke immediately stop using the product, turn off the power, and consult your dealer.
- (14) Do not use thinner, benzene, acetone, and lamp oil for cleaning.

## Mounting the Fiber Amplifier Units

### ■ Mounting on DIN Track

1. Let the hook on the Amplifier Unit's Fiber Unit connection side catch the track and push the unit until it clicks.




### ■ Removing from DIN Track

1. Push the unit in the direction 1.
2. Lift it up in the direction 2.




Refer to "I/O Circuit Diagrams" or check the side of the unit for wire color and role indications.



### ■ Mounting Amplifier Units in Group (Wire-saving Connector Type Models)

1. Mount the Fiber Amplifier units one at a time onto the DIN track and push them until they click.
2. Slide the Fiber Amplifier units in the direction 2.
3. Use End Plates (PFP-M: separately sold) at the both ends of the grouped Fiber Amplifier units to prevent them from separating due to vibration or other cause.
4. Tighten the screw on the End Plates using a driver.

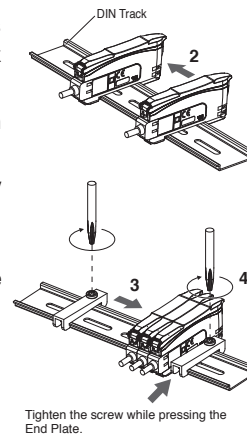

- Under environments such as vibration, use an end plates even with a single Fiber Amplifier Unit.
- The maximum numbers of connectable Amplifier Units are given in the following table.

		Maximum number of interconnected	Maximum number of mutual interference prevention
<b>E3NX-FA series*</b>		30	10
<b>E3X-HD series standard models* (E3X-HD11/HD41/HD6/HD8)</b>		16	10
<b>E3X-HD0</b>	<b>With E3X-ECT</b>	30	10
	<b>With E3X-CRT</b>	16	10

- If Units are to be connected, the ambient temperature will change with the number of Units that are connected. Check the Ratings and Characteristics specifications.
- Always turn OFF the power before connecting or disconnecting Units.
- \* The mutual interference prevention function cannot be used if the detection mode is set to super-high-speed mode (SHS).

## Mounting Fiber Units

### ■ Use Fiber Cutter


Cut a thin fiber as follows.

For standard fibers, insert to the desired cutting position and cut.



(1)	The fiber is shipped loosely tightened as shown in the figure at the right	 Thin Fiber Attachment (E39-F9) Loosely tighten.
(2)	Adjust the fiber to the desired length and fully tighten.	
(3)	Insert the Fiber Unit into E39-F4 and cut it.	 Fiber Cutter E39-F4 Thin-diameter Fiber Unit Hole × 2 Standard Fiber Unit Hole (dia. 2.2 mm) × 3
(4)	Finished state. (Correctly cut end)	 About 0.5 mm Insertion direction <b>Note:</b> The insertion direction into the Fiber Amplifier Unit is shown in the above figure.

### ■ Mount Fiber Unit

1. Open the protective cover.
2. Raise the lock lever.
3. Insert the Fiber Unit in the fiber unit hole to the bottom.
4. Return the lock lever to the original position and fix the Fiber Unit.

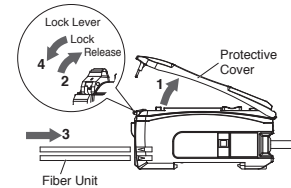

- When mounting a coaxial reflective Fiber Unit, insert the single-core Fiber Unit to the upper hole (Emitter side) and the multi-core Fiber Unit to the lower hole (Receiver side). The cables for the Single-core Fiber Units (Emitters) have identification marks. Refer to the dimensions diagrams for details.
- When removing the Fiber Unit, follow the above steps in reverse order. To maintain the characteristics of the Fiber Unit, make sure the lock is released before removing the Fiber Unit.



Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow  
view

BGS

Retro-  
reflectiveLimited-  
reflectiveChemical-  
resistant,  
Oil-resistant

Bending

Heat-  
resistantArea  
Detection

Liquid-level

Vacuum

FPD,  
Semi,  
Solar

## Fiber Units

**Warning**

This product is not designed or rated for ensuring safety of persons either directly or indirectly.  
Do not use it for such purposes.



## Precautions for Correct Use


Do not use the Fiber Unit in atmospheres or environments that exceed product ratings.

## • Mounting


## Tightening Force

Refer to pages 56 to 59 for the tightening torque to apply when mounting a Fiber Unit.

## &lt;Threaded Models&gt;

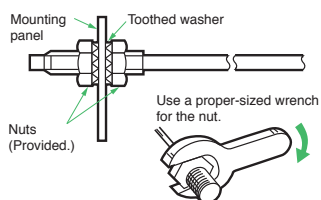


## &lt;Cylindrical Models&gt;



## &lt;Chemical and Oil-resistant Models&gt;

The following method is recommended for mounting Fiber Units with fluororesin-covered sensing heads (E32-T□F and E32-D□F) to prevent from cracking the fluororesin case.

If you use a set screw to secure the Fiber Unit, tighten it with care to prevent from cracking the case.

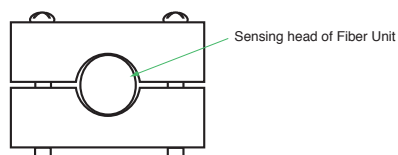

## Connections

- Do not subject the Fiber Unit to excessive force, such as tension or compression.

Refer to pages 56 to 59 for tensile strengths.


- Make sure any bend in the Fiber Unit is larger than the allowable bending radius.

Refer to pages 56 to 59 for bending radius ratings and length of unbendable sections at the base of the Fiber Unit.

- Do not compress or place heavy loads on the fibers.





- The method shown below is an effective way to prevent the Fiber Unit from breaking due to vibration.

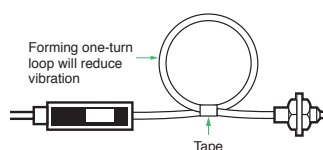

## Sleeve Bender (E39-F11)

- The bending radius of the stainless steel tube should be as large as possible. The smaller the bending radius is, the shorter the sensing distance will be.

- Insert the tip of the stainless steel tube in the Sleeve Bender and slowly bend the tube along the curve of the Sleeve Bender.

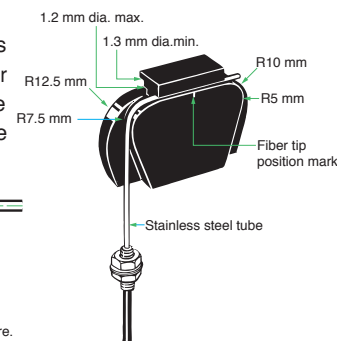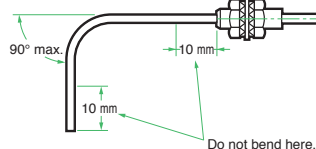

## Heat-resistant Fiber Units (E32-D51(R) and E32-T51(R))


The fibers of these Units cannot be extended using the E39-F10 Fiber Connector.

## E32-T14

These Units may enter the light-ON state if there are reflective objects at the end of the lenses.

If reflection is a problem, attach the black stickers provided to the ends of the lenses.

## E32-T16PR



To use the provided slit, peel off the backing sheet, align the slit with the edges of the sensing surface, and attach it to the sensing head.

Use the slit in applications where saturation occurs (i.e., changes in incident level cannot be detected) due to short sensing distances.

## Vacuum-resistant Fiber Units (E32-□V)

Although the Flanges, the Fiber Units on the vacuum side, and the Lens Units have been cleaned, as an extra precaution, clean these with alcohol before using them in high-vacuum environments to ensure that they are properly degreased.

## Liquid-level Detection Fiber Unit (E32-D82F1)

- Secure the Fiber Unit using the unbendable section. Otherwise, the liquid-level detection position may be displaced.
- For applications in hazardous environments, install the Fiber Unit in the hazardous environment but install the Amplifier Unit in a safe environment.

## Liquid-level Detection Fiber Units (Tube-mounting Models)


- Make sure that the tube is not deformed when using a band to secure the Fiber Unit.

## ● Adjustment

### Detection Position for Liquid-level Detection Fiber Unit (E32-D82F1)

The liquid-level detection position is  $5.2 \pm 2$  mm from the end of the fluororesin section. (Refer to the diagram on the right.)

The liquid-level detection position varies with the surface tension of the liquid and the degree of wetness at the Fiber Unit's detection position.

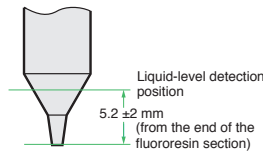

## ● Other Precautions

### Liquid-level Detection Fiber Unit (E32-D82F1)

- Operation may become unstable in the following cases:
  1. Bubbles stick to the cone of the sensing head.
  2. Solute deposits on the cone of the sensing head.
  3. The liquid has a high viscosity.
- There are some liquids, such as milky white liquids, for which detection is not possible.
- Do not let the end of the fluororesin section bump into other objects.  
Damage to or deformation of the sensing head may cause unstable operation.

### Chemical and Oil-resistant, Liquid-level Detection Fiber Unit (E32-D82F1)

Fluororesin shows strong chemical-resistant properties but is permeable if exposed to atmospheres with gaseous chemicals or water vapors, resulting in failure or damage.  
Confirm applicability sufficiently before using the Fiber Unit in these environments.




## Accessories

### Use of E39-R3 Reflector Provided with E32-R21


1. Use detergent to remove any dust or oil from the surfaces where tape is applied. Adhesive tape will not be attached properly if oil or dust remains on the surface.
2. The E39-R3 cannot be used in areas that are exposed to oil or chemicals.

### Mounting method of Protective Spiral Tubes

1. Insert the Fiber Unit into the Protective Spiral Tube from the head connector (threaded).
2. Push the fiber into the Protective Spiral Tube. The tube must be straight so that the fiber enters without twisting. Turn the Protective Spiral Tube, not the fiber.
3. Secure the Protective Spiral Tube to the mounting panel with the provided nuts.

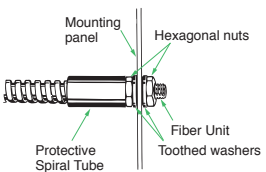


4. Use the provided saddle to secure the end cap of the Protective Spiral Tube.  
(To secure the Protective Spiral Tube at a position other than the end cap, apply tape to the tube so that the portion becomes thicker in diameter.)



### Attaching the E39-F10 Fiber Connector

Attach the Fiber Connector as shown in the following figures.

1. Insert the Fiber Unit in the retention clip.
2. Insert the retention clip into the splice.

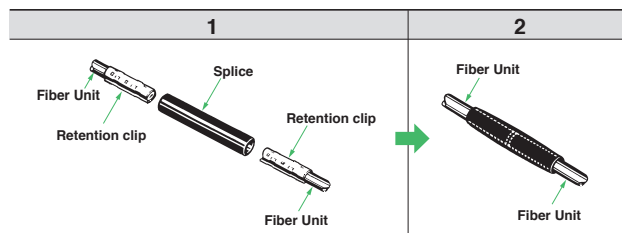

- The Fiber Units should be as close as possible when they are connected.  
The sensing distance is reduced by approximately 25% when Fiber Units are extended by the connector.
- Only 2.2-mm-diameter fibers can be connected.

Threaded

Cylindrical

Flat

Sleeved

Small Spot

High Power

Narrow view

BGS

Retro-reflective

Limited-reflective

Chemical-resistant,  
Oil-resistant

Bending


Heat-resistant

Area Detection

Liquid-level

Vacuum

FPD, Semi, Solar

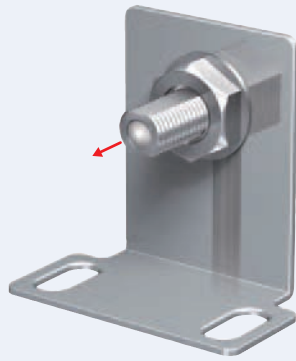

- You can easily mount these Fiber Units by making a hole in the bracket and tightening just one nut.
- The cable follows the wall, so extra space is not required, and the cable will not get caught on other objects.



### Build-in Lens











A Fiber Unit with Build-in Lens is the new standard in fiber units.

A high-power beam ensures stable detection even in dusty environments, and an aperture angle of 15° reduces false operation for reflection off of surrounding objects in narrow locations. Since it has a built-in lens, you don't have to worry about the lens falling off and getting lost.







## Specifications



### Through-beam Fiber Units

Aperture angle	Size	Appearance (mm)	Bending radius of cable	Sensing distance (mm)					Optical axis diameter (minimum sensing object)	Models	97 Page Dimensions No.
				E3X-HD			E3NX-FA <b>NEW</b>				
				■GIGA ■HS	Other modes	■GIGA ■HS	Other modes				
Approx. 15°	M4		Flexible, R2	 4,000*	ST : 3,500	 4,000*	ST : 4,000*	2.3 dia. (0.1 dia./0.03 dia.)	E32-LT11N 2M <b>NEW</b>	<b>97-A</b>	
			 2,300	SHS: 920	 3,450	SHS: 920					
Approx. 60°	M4		Flexible, R1	 2,000	ST : 1,000	 3,000	ST : 1,500	1 dia. (5 μm dia./2 μm dia.)	E32-T11N 2M	<b>97-B</b>	
				 700	SHS: 280	 1,050	SHS: 280				

### Reflective Fiber Units

Aperture angle	Size	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	97 Page Dimensions No.		
				E3X-HD		E3NX-FA <b>NEW</b>						
				■GIGA ■HS	Other modes	■GIGA ■HS	Other modes					
Approx. 15°	M6		Flexible, R2	■ 840	ST : 350	■ 1,260	ST : 520	(0.1 dia./ 0.03 dia.)	<b>E32-LD11N 2M</b> <b>NEW</b>	<b>97-C</b>		
	■ 240	SHS: 100		■ 360	SHS: 100							
Approx. 60°	M3			■ 290	ST : 130	■ 440	ST : 190	(5 μm dia./ 2 μm dia.)	<b>E32-C21N 2M</b> <b>NEW</b>	<b>97-D</b>		
	■ 90	SHS: 39		■ 130	SHS: 39							
	M4			■ 840	ST : 350	■ 1,260	ST : 520				<b>E32-D21N 2M</b> <b>NEW</b>	<b>97-E</b>
	■ 240	SHS: 100		■ 360	SHS: 100							
	M6		Flexible, R4	■ 780	ST : 350	■ 1,170	ST : 520	(5 μm dia./ 2 μm dia.)	<b>E32-C11N 2M</b>	<b>97-F</b>		
			■ 320	SHS: 100	■ 480	SHS: 100						

### Retro-reflective Fiber Units (With M.S.R. Function)

Aperture angle	Size	Appearance (mm)	Bending radius of cable	Sensing distance (mm)				Optical axis diameter (minimum sensing object)	Models	97 Page Dimensions No.
				E3X-HD		E3NX-FA <span>NEW</span>				
				■GIGA ■HS	Other modes	■GIGA ■HS	Other modes			
Approx. 15°	M6		Flexible, R2	1,350	ST : 1,200	2,020	ST : 1,800	—	E32-LR11NP 2M + E39-RP1 <span>NEW</span>	
				1,000	SHS: 550	1,500	SHS: 550			

\* The optical fiber is 2 m long on each side, so the sensing distance is 4,000 mm.

**Note 1.** The following model names and response times apply to the modes given in the Sensing distance column.

[E3X-HD] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (NPN output: 50 μs, PNP output: 55 μs)

[E3NX-FA] GIGA: Giga-power mode (16 ms), HS: High-speed mode (250 μs), ST: Standard mode (1 ms), and SHS: Super-high-speed mode (30 μs)

2. The values for the minimum sensing object are reference values that indicate values obtained in standard mode with the sensing distance and sensitivity set to the optimum values. The first value is for the E3X-HD and the second value is for the E3NX-FA.

3. The sensing distances for Reflective Sensors are for white paper. (The sensing distances for the E32-LD11N 2M are for glossy white paper).


4. With Retro-reflective Models, objects with a high reflection factor may cause the Fiber Sensor to detect reflected light as incident light. Also, stable detection may not be possible for transparent objects. Check suitability beforehand.

### Dimensions


Installation Information → 58, 59, 60, 61 Page

#### Through-beam Fiber Units

97-A E32-LT11N 2M (Free Cutting)

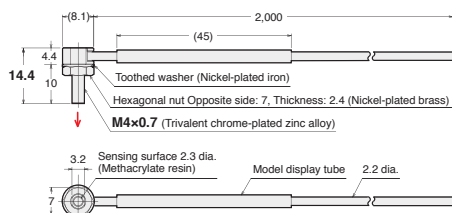


97-B E32-T11N 2M (Free Cutting)

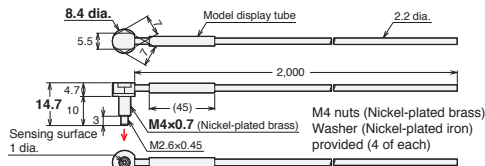


#### Reflective Fiber Units

97-C E32-LD11N 2M (Free Cutting)

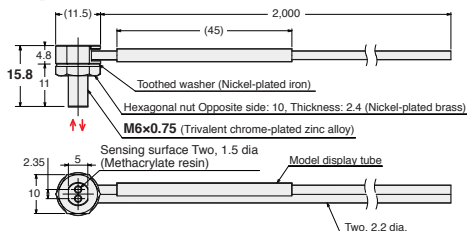


97-D E32-C21N 2M (Free Cutting)

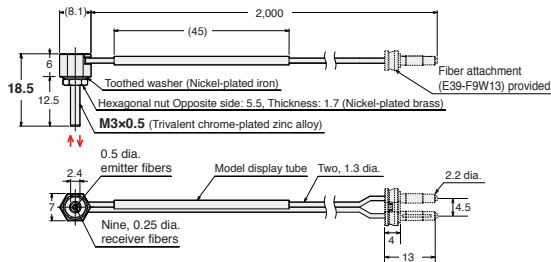


Note: There is a white line on the emitter fiber.

97-E E32-D21N 2M (Free Cutting)

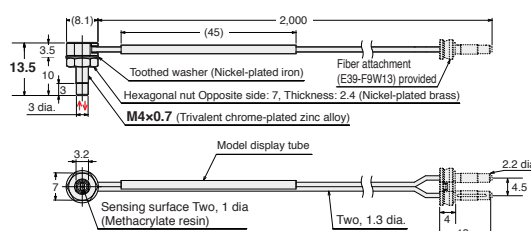


97-F E32-C11N 2M (Free Cutting)

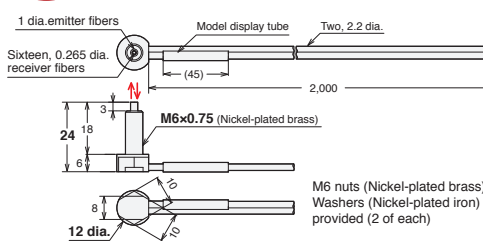


Note: There is a white line on the emitter fiber.

#### Retro-reflective Fiber Units (With M.S.R. Function)

97-G E32-LR11NP 2M (Free Cutting)

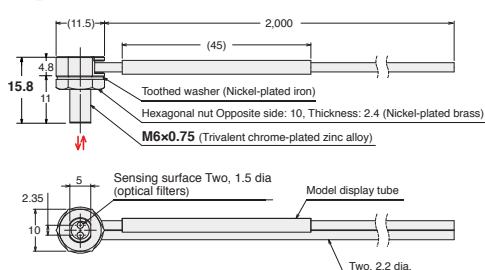

E39-RP1

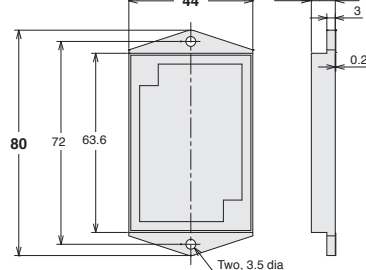


Material:  
<Reflective surface>  
Methacrylate resin  
<Back> ABS

#### - Reference Information for Model Selection -


##### Features of Coaxial Reflective Type

These Fiber Units offer better detection of small objects at close distances (of 2 mm or less) than Standard Reflective Fiber Units. They also detect glossy surfaces more reliably than Standard Reflective Fiber Units, even if the surface is tilted. The receiver fibers are arranged around the emitter fiber as shown below.



##### What Is "Flexible" Fiber?

The flexible fiber has a small bending radius for easy routing without easily breaking. It is easy to use because the cable can be bent without significantly reducing light intensity.

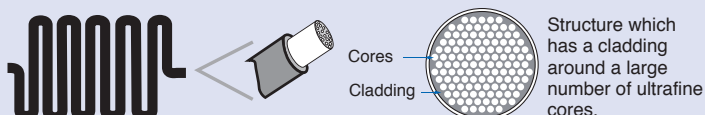

##### Transparent Object Detection

Retro-reflective Models are ideal for detection of transparent objects.  
→ 35 Page: Performance Comparison of Transparent Object Detection

And

##### Long-distance Sensing Applications with the E32-T11N

A separate Lens Unit can be attached to extend the sensing distance.  
→ 26 Page

Fiber Sensor  
Features

Selection  
Guide

Fiber Units

Threaded  
Cylindrical  
Standard Installation

Flat  
Sleeved  
Saving Space

Small Spot  
High Power  
Narrow view  
Beam Improvements

BGS  
Retro-reflective  
Limited-reflective  
Transparent Objects

Chemical-resistant,  
Oil-resistant  
Bending  
Heat-resistant  
Environmental Immunity

Area Detection  
Liquid-level  
Vacuum  
Applications

FPD,  
Semi,  
Solar  
Installation  
Information

Fiber Amplifiers,  
Communications  
Unit, and  
Accessories

Technical  
Guide and  
Precautions

Model Index

Models	Specifica- tions	Dimensions
<b>E32-A</b>		
E32-A01 5M	P.50	P.51 (51-A)
E32-A03 2M	P.30	P.31 (31-A)
	P.56	P.57 (57-A)
E32-A03-1 2M	P.30	P.31 (31-B)
	P.56	P.57 (57-B)
E32-A04 2M	P.30	P.31 (31-C)
	P.56	P.57 (57-C)
E32-A08 2M	P.36	P.37 (37-C)
	P.54	P.55 (55-B)
E32-A08H2 2M	P.46	P.47 (47-D)
	P.54	P.55 (55-C)
E32-A09 2M	P.36	P.37 (37-F)
	P.54	P.55 (55-E)
E32-A09H2 2M	P.46	P.47 (47-E)
	P.54	P.55 (55-F)
E32-A12 2M	P.36	P.37 (37-D)
	P.54	P.55 (55-D)
<b>E32-C</b>		
E32-C11N 2M	P.08 (P.22)	P.09 (P.23) (09-B)
E32-C21N 2M	P.96 (P.20, 22)	P.97 (97-D) (P.21, 23)
E32-C31 2M	P.08 (P.20, 22)	P.09 (09-D) (P.21, 23)
E32-C31M 1M	P.08	P.09 (09-E)
E32-C31N 2M	P.08	P.09 (09-A)
E32-C41 1M	P.22	P.23 (23-A)
		(23-D)
E32-C42 1M	P.20	P.21 (21-A)
		(21-B)
E32-C42S 1M	P.20	P.21 (21-E)
E32-CC200 2M	P.08 (P.22)	P.09 (09-H) (P.23)
<b>E32-D</b>		
E32-D11 2M	P.42	P.43 (43-E)
E32-D11R 2M	P.08	P.09 (09-G)
E32-D11U 2M	P.38	P.39 (39-I)
E32-D12F 2M	P.38	P.39 (39-H)
E32-D15XR 2M	P.14	P.15 (15-D)
E32-D15YR 2M	P.14	P.15 (15-E)
E32-D15ZR 2M	P.14	P.15 (15-F)
E32-D16 2M	P.24	P.25 (25-E)
E32-D21 2M	P.42	P.43 (43-B)
E32-D211R 2M	P.08	P.09 (09-F)
E32-D21B 2M	P.42	P.43 (43-D)
E32-D21N 2M	P.96	P.97 (97-E)
E32-D21R 2M	P.08	P.09 (09-C)
E32-D21-S3 2M	P.18	P.19 (19-J)
E32-D221B 2M	P.12	P.13 (13-D)
	P.42	P.43 (43-C)
E32-D22B 2M	P.12	P.13 (13-A)
	P.42	P.43 (43-A)
E32-D22R 2M	P.12	P.13 (13-C)
E32-D22-S1 2M	P.18	P.19 (19-I)
E32-D24R 2M	P.18	P.19 (19-A)
E32-D24-S2 2M	P.18	P.19 (19-B)
E32-D25XB 2M	P.42	P.43 (43-F)
E32-D25-S3 2M	P.18	P.19 (19-L)
E32-D31-S1 0.5M	P.18	P.19 (19-G)
E32-D32L 2M	P.12	P.13 (13-E)
E32-D32-S1 0.5M	P.18	P.19 (19-F)
E32-D33 2M	P.12	P.13 (13-F)
	P.18	P.19 (19-E)

Models	Specifica- tions	Dimensions
E32-D331 2M	P.18	P.19 (19-D)
E32-D36P1 2M	P.48	P.49 (49-D)
E32-D36T 2M	P.50	P.51 (51-C)
E32-D43M 1M	P.12	P.13 (13-B)
	P.18	P.19 (19-C)
E32-D51 2M	P.46	P.47 (47-B)
E32-D51R 2M	P.46	P.47 (47-A)
E32-D61-S 2M	P.46	P.47 (47-G)
E32-D611-S 2M	P.46	P.47 (47-F)
E32-D73-S 2M	P.46	P.47 (47-H)
E32-D81R-S 2M	P.46	P.47 (47-C)
E32-D82F1 4M	P.50	P.51 (51-D)
E32-DC200BR 2M	P.18	P.19 (19-K)
E32-DC200F4R 2M	P.18	P.19 (19-H)
<b>E32-L</b>		
E32-L11FP 2M	P.38	P.39 (39-F)
	P.54	P.55 (55-G)
E32-L11FS 2M	P.38	P.39 (39-G)
	P.54	P.55 (55-H)
E32-L15 2M	P.20	P.21 (21-F)
E32-L16-N 2M	P.32	P.33 (33-A)
	P.36	P.37 (37-B)
	P.54	P.55 (55-A)
E32-L24S 2M	P.32	P.33 (33-B)
	P.36	P.37 (37-A)
E32-L25L 2M	P.32	P.33 (33-C)
	P.36	P.37 (37-E)
E32-L25T 2M	P.50	P.51 (51-B)
E32-LD11 2M	P.08	P.09 (09-I)
E32-LD11N 2M	P.96	P.97 (97-C)
E32-LD11R 2M	P.08	P.09 (09-I)
E32-LR11NP 2M	P.34	P.35 (35-A)
	P.96	P.97 (97-G)
E32-LT11 2M	P.06	P.07 (07-C)
	P.24	P.25 (25-C)
E32-LT11N 2M	P.24	P.25 (25-A)
	P.96	P.97 (97-A)
E32-LT11R 2M	P.06	P.07 (07-C)
	P.24	P.25 (25-C)
<b>E32-R</b>		
E32-R16 2M	P.34	P.35 (35-B)
E32-R21 2M	P.34	P.35 (35-C)
<b>E32-T</b>		
E32-T10V 2M	P.52	P.53 (53-D)
E32-T11 2M	P.40 (P.26)	P.41 (41-C) (P.27)
E32-T11F 2M	P.38	P.39 (39-C)
E32-T11N 2M	P.06 (P.26)	P.07 (07-A) (P.27)
E32-T11NF 2M	P.38	P.39 (39-A)
E32-T11R 2M	P.06 (P.24)	P.07 (07-B) (P.25, 26)
E32-T12F 2M	P.38	P.39 (39-B)
E32-T12R 2M	P.10	P.11 (11-C)
E32-T14 2M	P.24	P.25 (25-D)
E32-T14F 2M	P.38	P.39 (39-D)
E32-T14LR 2M	P.10	P.11 (11-D)
E32-T15XR 2M	P.14	P.15 (15-A)
E32-T15YR 2M	P.14	P.15 (15-B)
E32-T15ZR 2M	P.14	P.15 (15-C)
E32-T16JR 2M	P.48	P.49 (49-B)
E32-T16PR 2M	P.48	P.49 (49-A)
E32-T16WR 2M	P.48	P.49 (49-C)
E32-T17L 10M	P.24	P.25 (25-B)

Models	Specifica- tions	Dimensions
E32-T21 2M	P.40	P.41 (41-B)
E32-T21-S1 2M	P.16	P.17 (17-D)
E32-T223R 2M	P.10	P.11 (11-A)
E32-T22B 2M	P.10	P.11 (11-B)
	P.40	P.41 (41-A)
E32-T22S 2M	P.30	P.31 (31-F)
E32-T24E 2M	P.16	P.17 (17-B)
E32-T24R 2M	P.16	P.17 (17-A)
E32-T24S 2M	P.30	P.31 (31-E)
	P.56	P.57 (57-E)
E32-T24SR 2M	P.30	P.31 (31-D)
	P.56	P.57 (57-D)
E32-T25XB 2M	P.40	P.41 (41-D)
E32-T33 1M	P.16	P.17 (17-C)
E32-T51 2M	P.44 (P.28)	P.45 (45-B) (P.29)
E32-T51F 2M	P.38	P.39 (39-E)
E32-T51R 2M	P.44 (P.28)	P.45 (45-A) (P.29)
E32-T51V 1M	P.52	P.53 (53-A)
E32-T61-S 2M	P.44 (P.28)	P.45 (45-D) (P.29)
E32-T81R-S 2M	P.44 (P.28)	P.45 (45-C) (P.29)
E32-T84SV 1M	P.52	P.53 (53-C)
E32-TC200BR 2M	P.16	P.17 (17-E)
<b>E32-V</b>		
E32-VF1	P.52	P.53 (53-F)
E32-VF4	P.52	P.53 (53-E)
<b>E39-F</b>		
E39-F1	P.26, 28	P.26 (26-A)
E39-F1-33	P.28	P.28 (28-D)
E39-F11	P.17	—
E39-F16	P.26, 28	P.26 (26-B)
E39-F17	P.20	P.21 (21-B)
E39-F18	P.22	P.23 (23-G)
		(23-H)
E39-F1V	P.52	P.53 (53-B)
E39-F2	P.26, 28	P.26 (26-C)
E39-F32A 1M	P.42	P.43 (43-G)
E39-F32C 1M	P.40	P.41 (41-E)
	P.42	P.43 (43-G)
E39-F32D 1M	P.42	P.43 (43-G)
E39-F3A	P.20	P.21 (21-A)
E39-F3A-5	P.22	P.23 (23-A)
		(23-B)
		(23-C)
E39-F3B	P.22	P.23 (23-D)
		(23-E)
		(23-F)
E39-F3C	P.20	P.21 (21-C)
		(21-D)
<b>E39-R</b>		
E39-R1	—	P.35 (35-B)
E39-R3	—	P.35 (35-C)
E39-RP1	P.34	P.35 (35-A)
	P.96	P.97 (97-G)
E39-RP37	P.35	—
E39-RSP1	P.35	—
<b>E39-L</b>		
E39-L143	—	P.89 (89-A)
<b>E3NW</b>		
E3NW-DS	P.76	P.77 (77-B)
E3NW-ECT	P.76	P.77 (77-A)

Models	Specifica- tions	Dimensions
<b>E3NX-FA</b>		
E3NX-FA0	P.66	P.69 (69-B)
E3NX-FA11 2M	P.66	P.68 (68-A)
E3NX-FA21 2M	P.66	P.68 (68-A)
E3NX-FA24	P.66	P.69 (69-A)
E3NX-FA41 2M	P.66	P.68 (68-A)
E3NX-FA51 2M	P.66	P.68 (68-A)
E3NX-FA54	P.66	P.69 (69-A)
E3NX-FA54TW	P.66	P.69 (69-A)
E3NX-FA6	P.66	P.68 (68-B)
E3NX-FA7	P.66	P.68 (68-B)
E3NX-FA7TW	P.66	P.68 (68-B)
E3NX-FA8	P.66	P.68 (68-B)
E3NX-FA9	P.66	P.68 (68-B)
E3NX-FA9TW	P.66	P.68 (68-B)
<b>E3X-CN</b>		
E3X-CN11	P.88	P.88 (88-A)
E3X-CN12	P.88	P.88 (88-B)
E3X-CN21	P.88	P.88 (88-A)
E3X-CN22	P.88	P.88 (88-B)
<b>E3X-CRT</b>		
E3X-CRT	P.86	P.87 (87-A)
<b>E3X-ECT</b>		
E3X-ECT	P.86	P.87 (87-B)
<b>E3X-HD</b>		
E3X-HD0	P.80	P.81 (81-C)
E3X-HD11 2M	P.80	P.80 (80-A)
E3X-HD14	P.80	P.81 (81-B)
E3X-HD41 2M	P.80	P.80 (80-A)
E3X-HD44	P.80	P.81 (81-B)
E3X-HD6	P.80	P.81 (81-A)
E3X-HD8	P.80	P.81 (81-A)
<b>PFP</b>		
PFP-100N	—	P.89 (89-B)
PFP-100N2	—	P.89 (89-C)
PFP-50N	—	P.89 (89-B)
PFP-M	—	P.89 (89-D)
<b>XS3F</b>		
XS3F-M421-402-A	P.88	P.88 (88-C)
XS3F-M421-405-A	P.88	P.88 (88-C)
XS3F-M422-402-A	P.88	P.88 (88-D)
XS3F-M422-405-A	P.88	P.88 (88-D)

# Terms and Conditions Agreement

## Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

## Warranties.

- (a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.
- (b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

## Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

## Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

## Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

## Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

## Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

## Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.

## The N-Smart Lineup

**E3NX-FA**  
Fiber Amplifier Units

**N-Smart Amplifier Units**  
Easy application with consistent operating procedures.

**E3NC-S**  
Ultra-compact CMOS  
Laser Sensors  
Cat. No. E427

**E3NC-L**  
Compact  
Laser Sensors  
Cat. No. E427

**E9NC-T**  
Contact-Type Smart Sensor  
Cat. No. E433

**E3NW**  
Sensor  
Communications Units  
Cat. No. E428

**EtherCAT**

**CompoNet**

**CC-Link V2**

**N-Smart**  
Presence / Detection / Measurement

**Applications with Many Sensors:**  
More convenience and even lower costs  
with a network.

## NEW Introducing New Fiber Sensor Products

### Fiber Units with Build-in Lenses Build-in Lens


**Hex-shaped models**  
E32-LT11N/LD11N/LR11NP

→ **96 Page**



**Straight type**  
E32-LT11(R)/LD11(R)

→ **06, 08 Page**

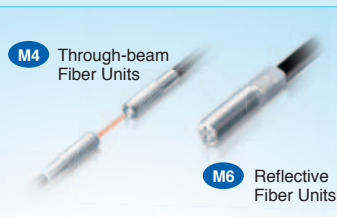

**Fiber Amplifier Units**  
E3NX-FA

→ **62 Page**



EtherCAT® is a registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

CompoNet is a registered trademark of the ODVA.

CC-Link is a registered trademark of Mitsubishi Electric Corporation. The trademark is managed by the CC-Link Partner Association.

**OMRON Corporation** Industrial Automation Company  
Tokyo, JAPAN

Contact: [www.ia.omron.com](http://www.ia.omron.com)

#### Regional Headquarters

**OMRON EUROPE B.V.**  
Sensor Business Unit  
Carl-Benz-Str. 4, D-71154 Nufringen, Germany  
Tel: (49) 7032-811-0/Fax: (49) 7032-811-199

**OMRON ASIA PACIFIC PTE. LTD.**  
No. 438A Alexandra Road # 05-05/08 (Lobby 2),  
Alexandra Technopark,  
Singapore 119967  
Tel: (65) 6835-3011/Fax: (65) 6835-2711

**OMRON ELECTRONICS LLC**  
2895 Greenspoint Parkway, Suite 200  
Hoffman Estates, IL 60169 U.S.A  
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

**OMRON (CHINA) CO., LTD.**  
Room 2211, Bank of China Tower,  
200 Yin Cheng Zhong Road,  
PuDong New Area, Shanghai, 200120, China  
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2012-2014 All Rights Reserved.  
In the interest of product improvement,  
specifications are subject to change without notice.

CSM\_9\_2\_0715  
Cat. No. E418-E1-04

Printed in Japan  
0814 (0212)