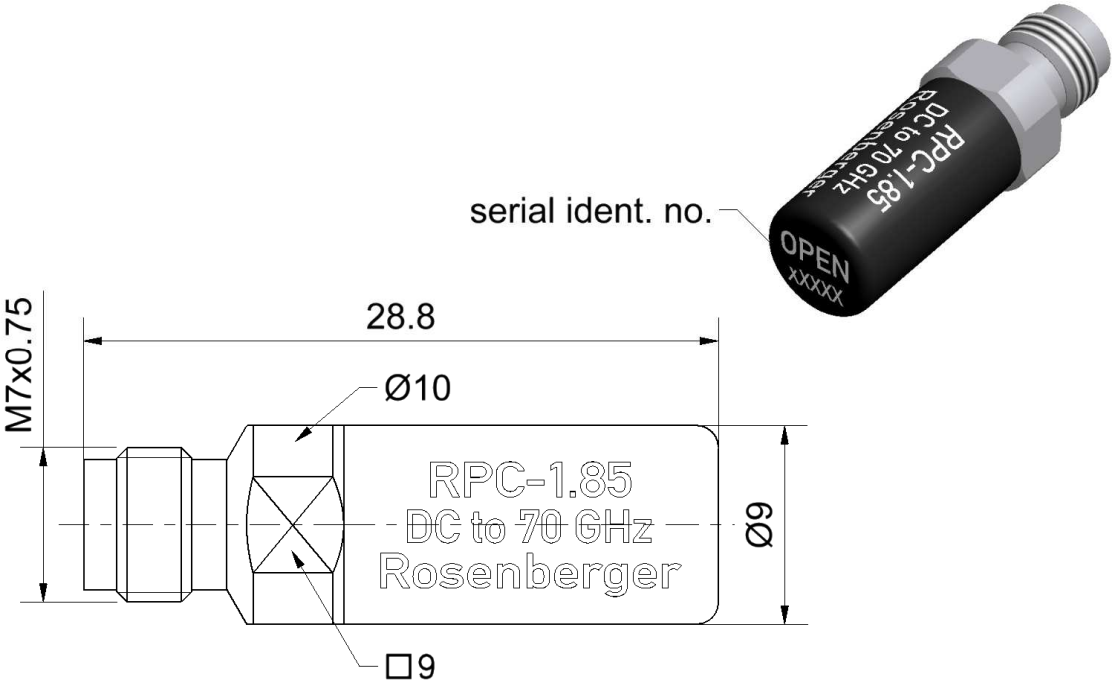


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.0

Technical Data Sheet		Rosenberger
RPC-1.85	Open Circuit Jack	08K12L-000S3
 serial ident. no.		
All dimensions are in mm; tolerances according to ISO 2768 m-H Interface According to Mechanically compatible with IEC 61169-32 RPC-2.40 Documents Application note AN001 "Calibration Services" Material and plating Connector parts Center conductor Outer conductor Dielectric Material Beryllium copper Stainless steel PS Plating Gold, min. 1.27 µm, over nickel Passivated		
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de		Tel. : +49 8684 18-0 Fax : +49 8684 18-499 Email : info@rosenberger.de
		Page 1 / 3

Electrical data

Frequency range	DC to 70 GHz
Return loss	≤ 0.20 dB, DC to 4 GHz ≤ 0.30 dB, 4 GHz to 40 GHz ≤ 0.40 dB, 40 GHz to 70 GHz
Error from nominal phase ¹	$\leq 2.0^\circ$, DC to 4 GHz $\leq 5.0^\circ$, 4 GHz to 40 GHz $\leq 8.0^\circ$, 40 GHz to 70 GHz

¹ The nominal phase is defined by the Offset Delay, the Offset Loss and the Fringing Capacitances

Mechanical data

Mating cycles	≥ 500
Maximum torque	1.65 Nm
Recommended torque	0.90 Nm
Gauge	0.00 mm to 0.03 mm

General standard definition

For proper operation the vector network analyzer (VNA) needs a model describing the electrical behaviour of this calibration standard. The different models, units, and terms used will depend on the VNA type and they will have to be entered into the VNA. All values are based on typical geometry and plating.

Offset Z_0 / Impedance / Z_0	50 Ω
Offset Delay	16.680 ps
Length (electrical) / Offset Length	5.00 mm
Offset Loss	3.75 G Ω /s
Loss	0.0109 dB/ $\sqrt{\text{GHz}}$
Fringing Capacitances ²	

² Fringing Capacitances are determined individually for each Open Circuit and are documented in a Calibration Certificate.

Environmental data

Operating temperature range ³	+20 °C to +26 °C
Rated temperature range of use ⁴	0 °C to +50 °C
Storage temperature range	-40 °C to +85 °C

RoHS	compliant
------	-----------

³ Temperature range over which these specifications are valid.

⁴ This range is underneath and above the operating temperature range, within the Open Circuit is fully functional and could be used without damage.

Dieses Dokument ist urheberrechtlich geschützt • Rosenberger Hochfrequenztechnik GmbH & Co. KG
RF_35/05.10/6.0

Technical Data Sheet				Rosenberger									
RPC-1.85		Open Circuit Jack		08K12L-000S3									
Declaration of calibration options Factory Calibration Standard delivery for this calibration standard includes a Factory Calibration. The Calibration Certificate issued reports individual calibration results, traceable to national / international standards. Model based standard definitions are individually optimized and reported in an Agilent/Keysight, Rohde & Schwarz and Anritsu compatible VNA format. Accredited Calibration Not available. For further, more detailed information see application note AN001 on the Rosenberger homepage. Calibration interval <table><tr><td>Recommendation</td><td>12 months</td></tr></table> Packing <table><tr><td>Standard</td><td>1 pce in box</td></tr><tr><td>Weight</td><td>7.3 g/pce</td></tr></table>								Recommendation	12 months	Standard	1 pce in box	Weight	7.3 g/pce
Recommendation	12 months												
Standard	1 pce in box												
Weight	7.3 g/pce												
While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.													
Draft		Date		Rev.		Engineering change number							
Approved		Date		Name		Date							
Herbert Babinger		26.08.04		Martin Moder		24.03.15							
f00		14-1492		Herbert Babinger		24.03.15							
Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de				Tel. : +49 8684 18-0 Fax : +49 8684 18-499 Email : info@rosenberger.de			Page 3 / 3						