



LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	P		REVISED PER ECO-11-005030	11MAR11	RK	HMR

D


C

B

A

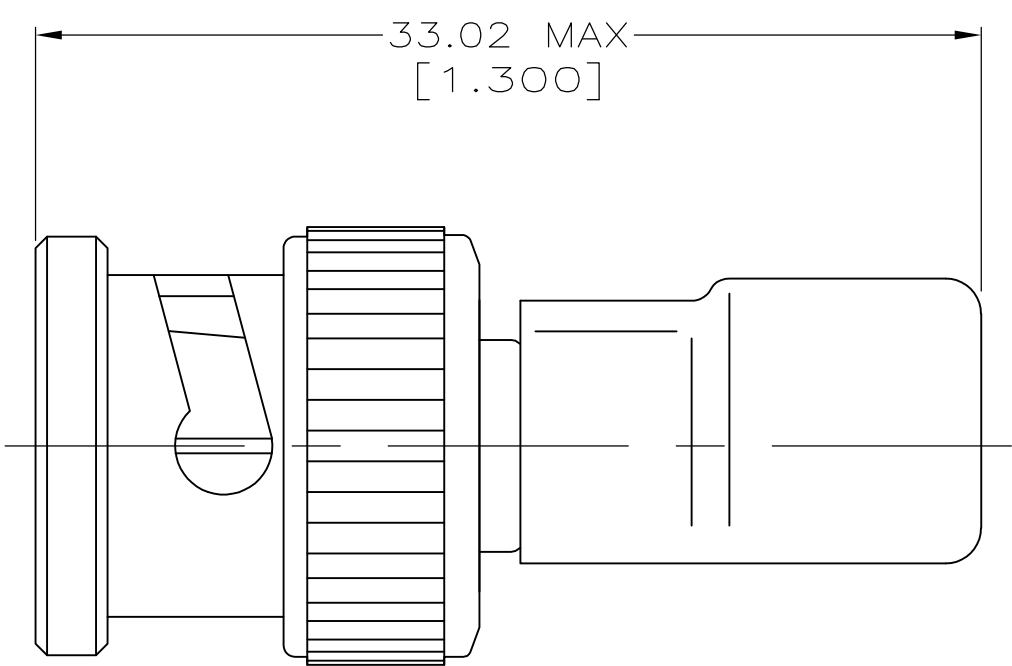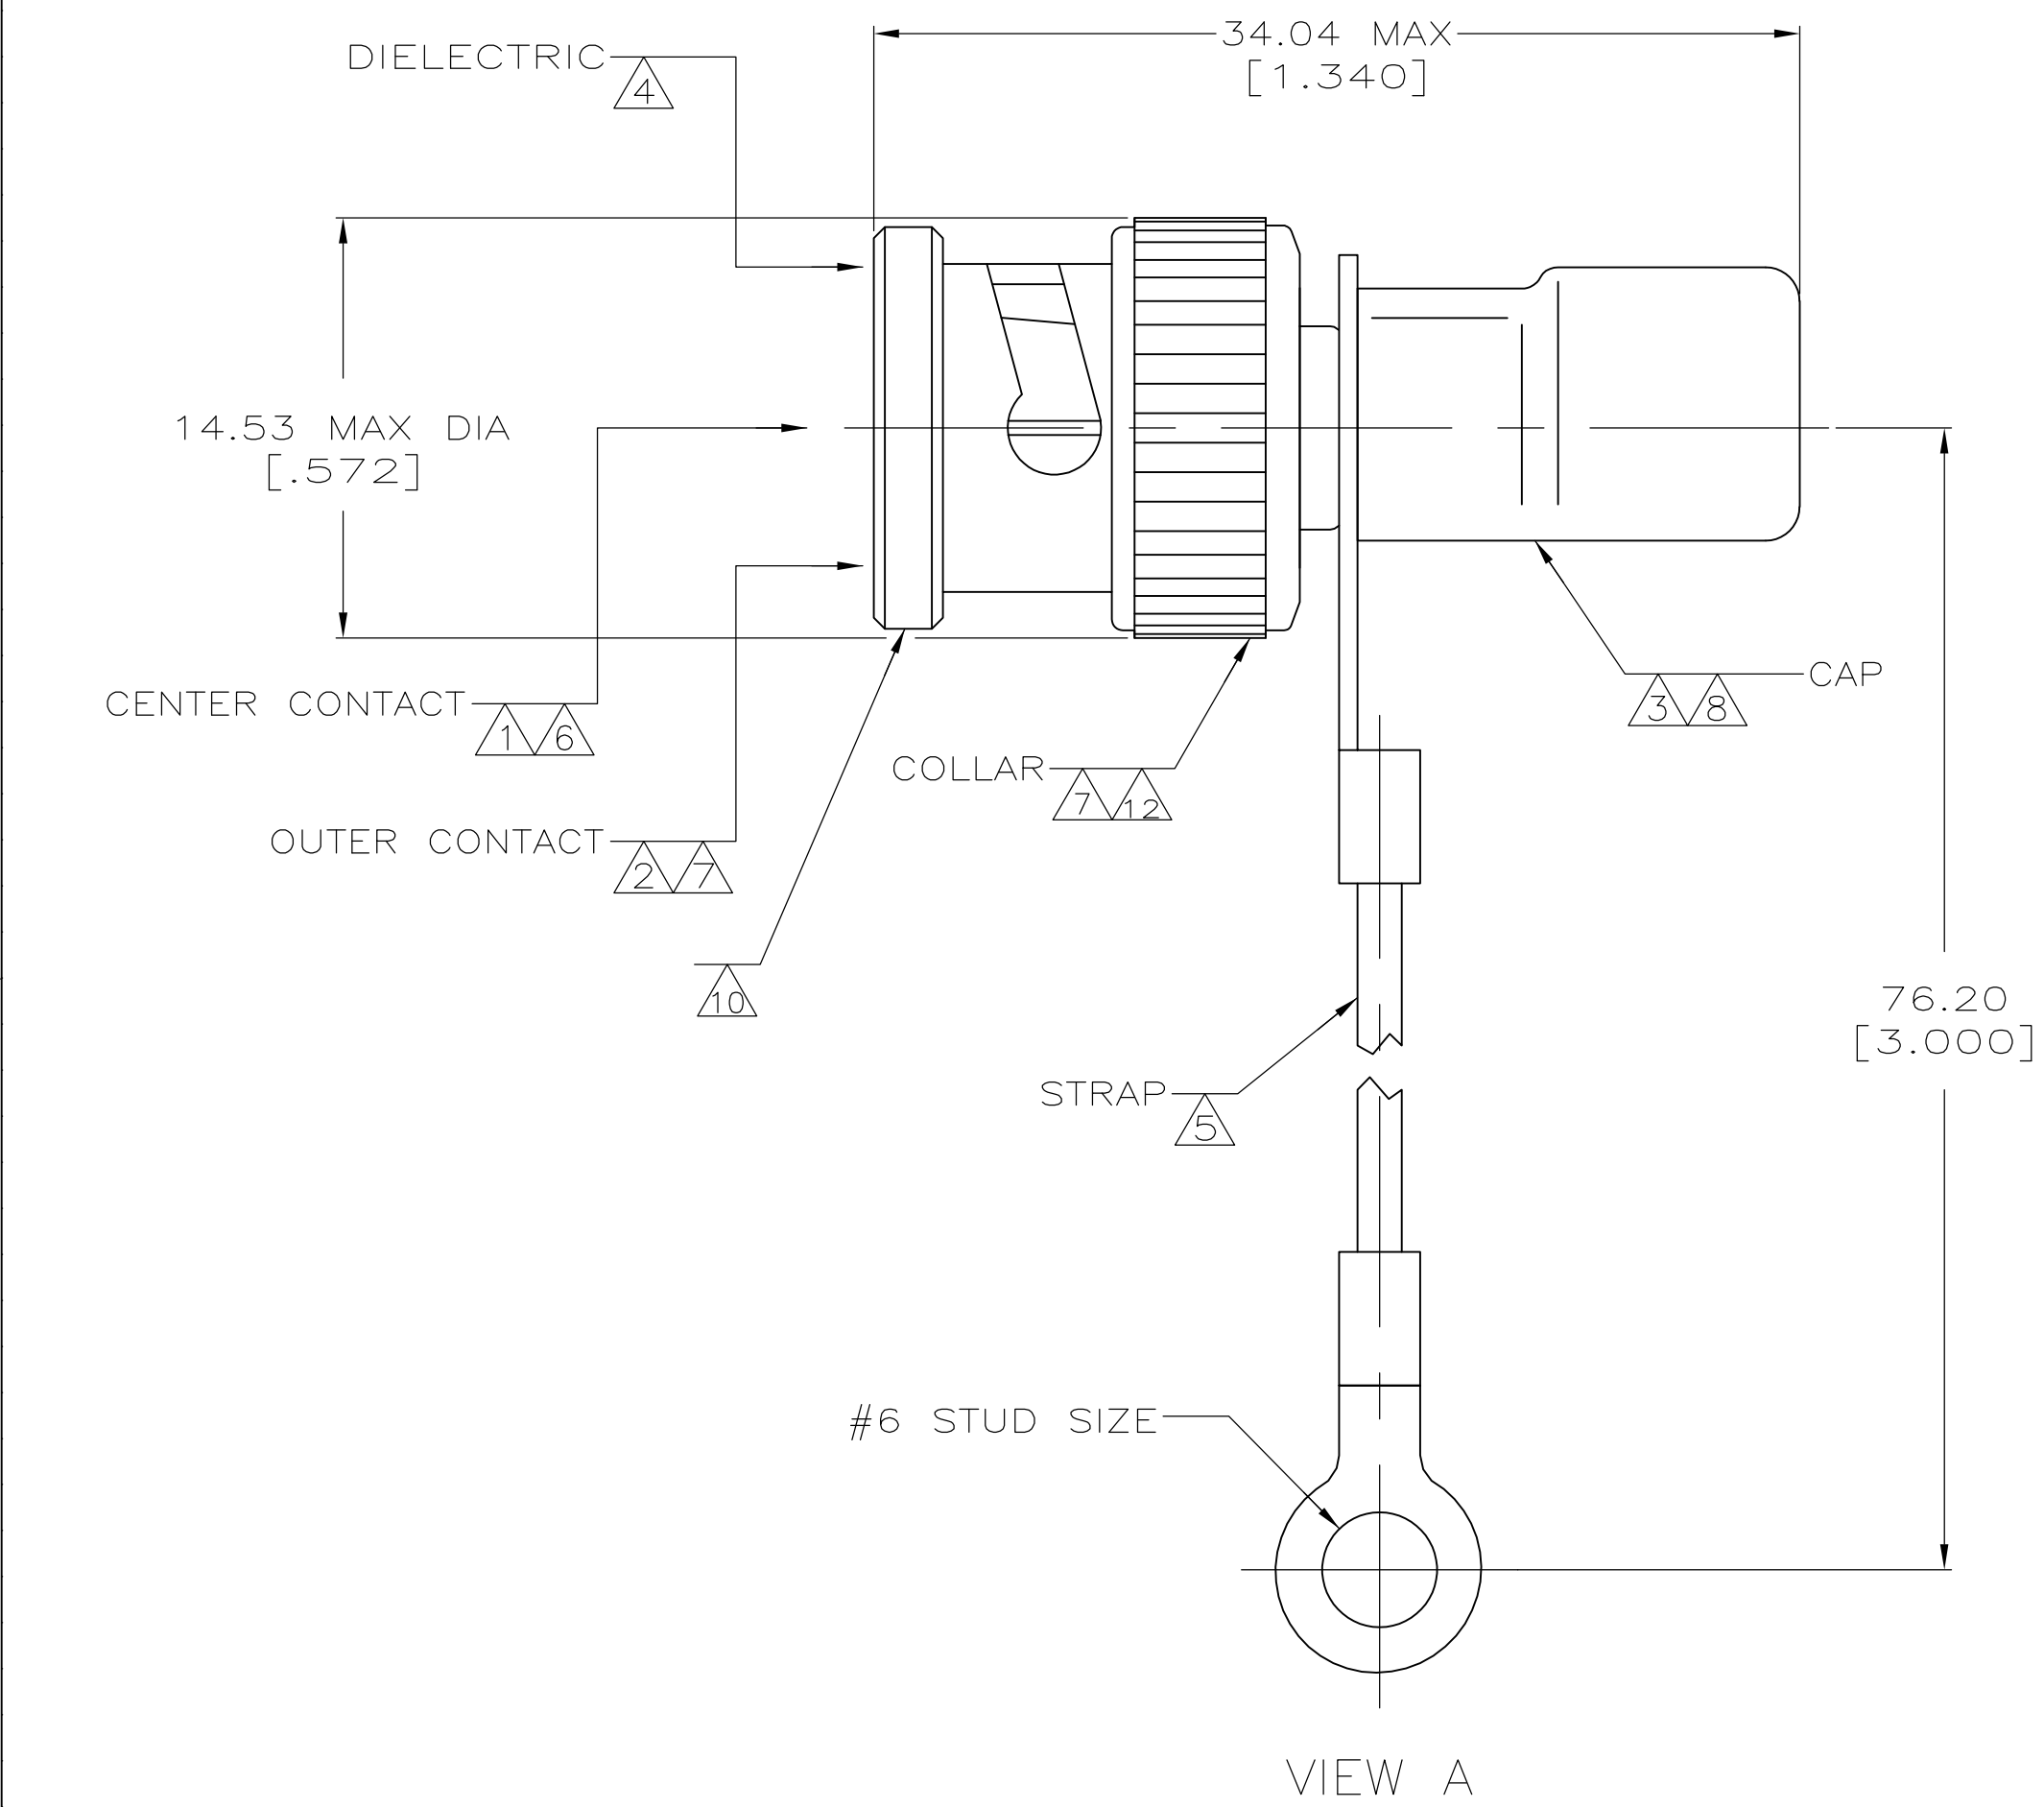


VIEW B
SAME AS VIEW A EXCEPT AS SHOWN

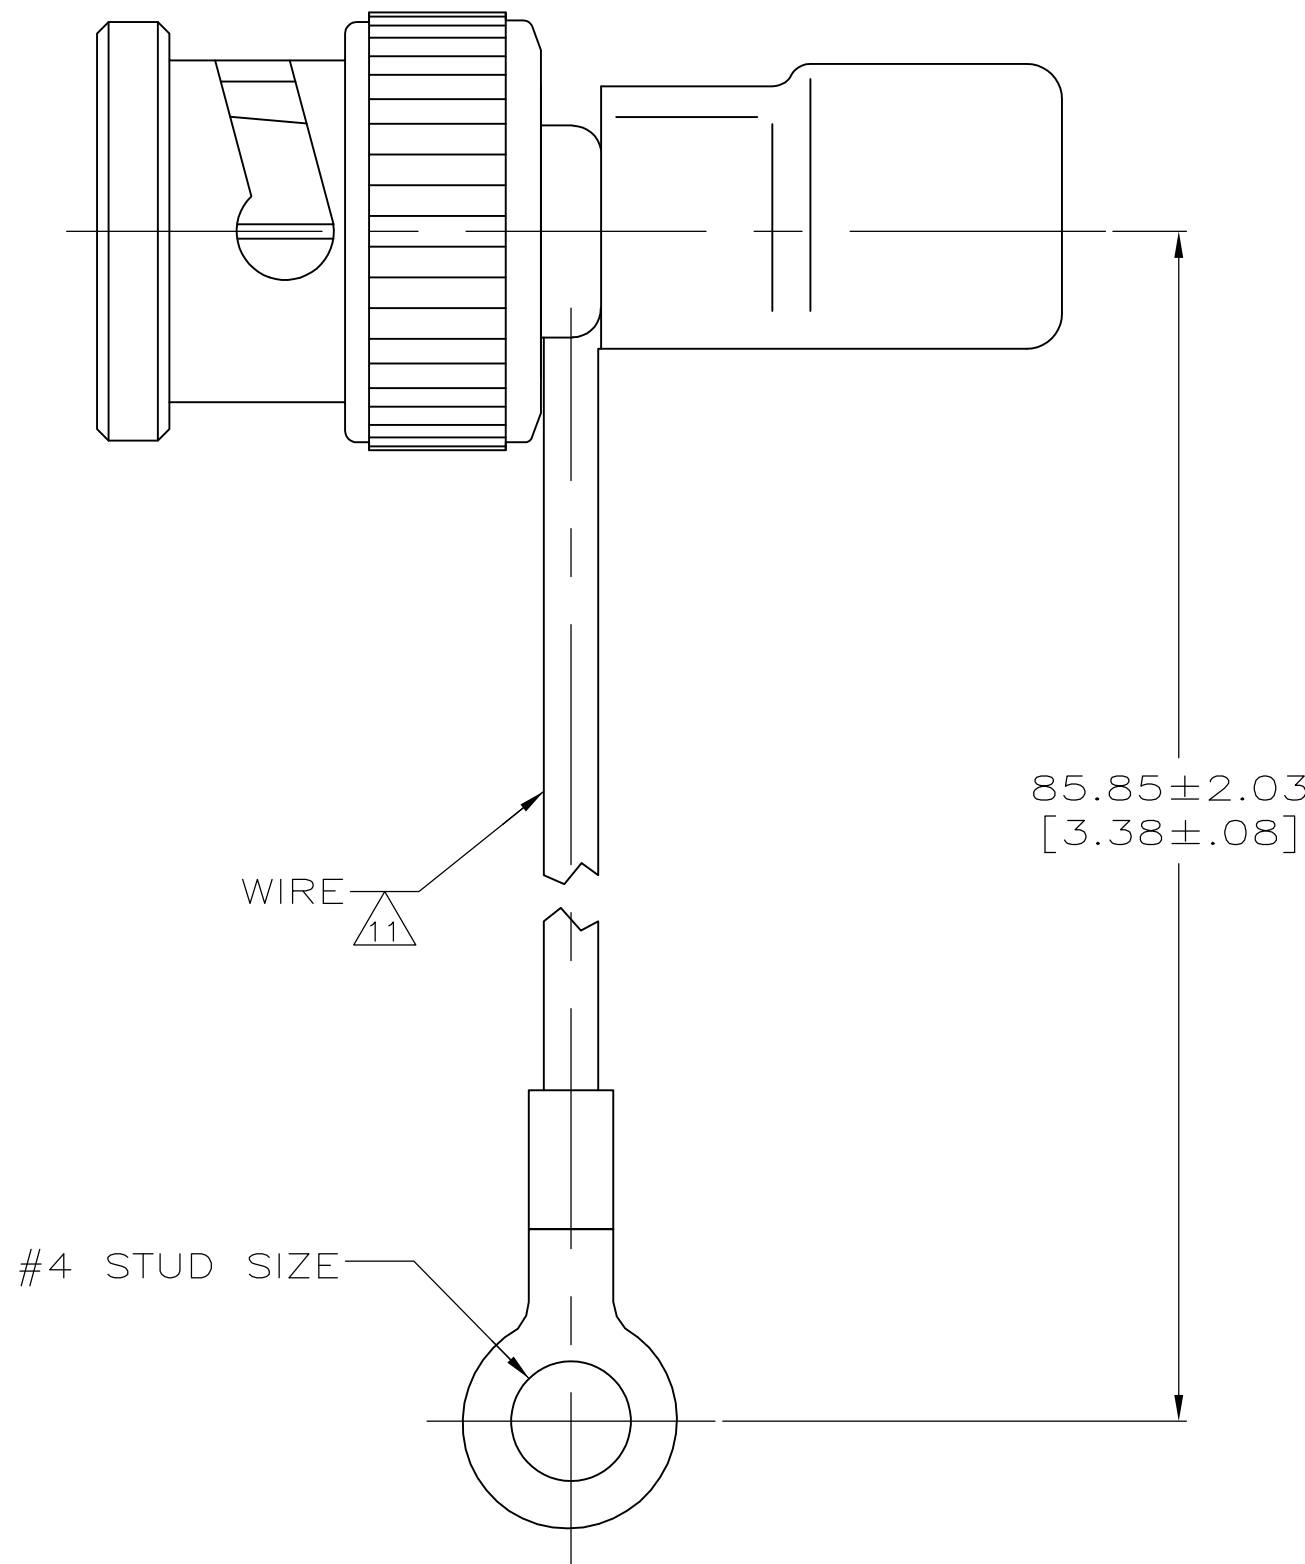

VIEW C
SAME AS VIEW A EXCEPT AS SHOWN

- 1 BRASS PER ASTM B 16.
- 2 BRASS PER ASTM B 36.
- 3 COPPER PER ASTM B 152.
- 4 POLYETHYLENE PER LP-390.
- 5 POLYESTER PER MIL-T-43435, COLOR NATURAL.
- 6 GOLD PLATE PER ASTM B 488, 0.76 μm [0.000030] MINIMUM THICK.
- 7 NICKEL PLATE PER QQ-N-290, 1.27 μm [0.000050] MINIMUM THICK.
- 8 TIN PLATE PER ASTM B 545, 2.54 μm [0.000100] MINIMUM THICK.
- 9 TIN PLATE PER ASTM B 545, 3.81 μm [0.000150] MINIMUM THICK.
- 10 VALUE MARKED ON CONNECTOR BODY AS SHOWN (SEE TABLE).
- 11 16 GAUGE INSULATED GROUND WIRE.
- 12 ZINC PER ASTM B 86.

1	1%	50	50 Ω 1W	C	1-5221629-6
1	1%	50	50 Ω 1W	B	5221629-9
1	1%	93	93 Ω 1W	B	5221629-6
1	1%	75	75 Ω 1W	B	5221629-5
1	1%	50	50 Ω 1W	B	5221629-4
1	1%	75	75 Ω 1W	A	5221629-2
1	1%	50	50 Ω 1W	A	5221629-1
WATT	TOLERANCE	OHM	MARKING 	VIEW	PART NUMBER
RESISTOR SPECIFICATIONS					

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. HAVENER 13DEC2005	 TE Connectivity			
		CHK J. LIPPERT 13DEC2005				
DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J. LIPPERT 13DEC2005	NAME	TERMINATOR, PLUG, COMMERCIAL BNC		
	0. PLC ± -	PRODUCT SPEC				
	1. PLC ± -	APPLICATION SPEC				
MATERIAL	2. PLC ± 3.18 [125]	—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	3. PLC ± -	—	A1	00779	C=5221629	—
—	4. PLC ± -	WEIGHT	—			
	ANGLES ± -	—	—			
FINISH		—	—			
—		—	—			
CUSTOMER DRAWING		SCALE	4:1	SHEET	1 of 1	REV
						P