




Quality Products. Service Excellence.

Plate & Filament 260 Series

Universal Primary & 50/60 Hz. Operation

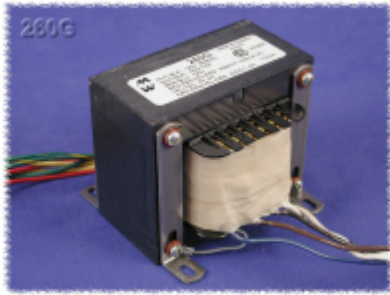

Classic

RoHS


Features

- Universal primary with taps for 100, 120, 220 or 240 VAC, 50/60 Hz. (Except the 260A6 which is 117V, 50/60 Hz only)
- Designed for preamps, low power amps, general replacement, test equipment, etc.
- Economical, open frame, chassis mount - two hole (.187 dia. = G) channel bracket (figure #1) or four hole mounting (figure #2).
- Units include a Faraday shield between the primary and secondary windings. Our electrostatic shield reduces the capacitive coupling from the primary - greatly attenuating higher frequency current coupling to the secondaries.
- Minimum 5" long leads.
- For more selection check out our **300 Series** of universal plate & filament transformers.

NOTES

1. These units are designed to run with BOTH primary windings energized for maximum efficiency (see wiring table below).
2. The Faraday shield lead - the gray wire - marked SH (shield) above, should remain grounded to the mounting bracket & in turn to the chassis.

Gallery

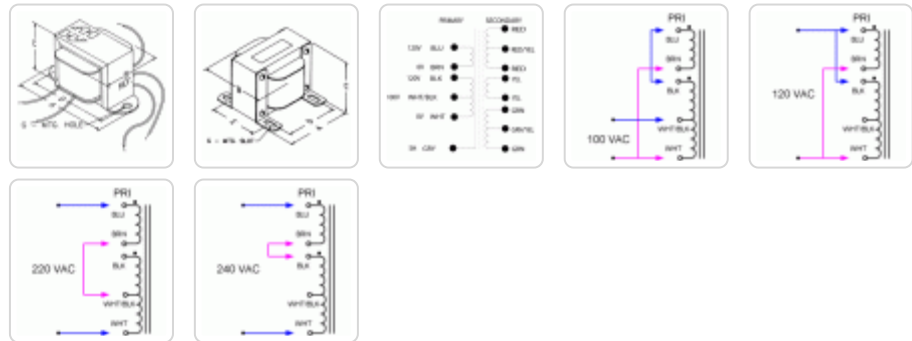

| Part No. | VA | A.C. High Voltage | | A.C. Filament Secondary #2 | A.C. Filament Secondary #3 | Figure # or PDF File | Dimensions | | | | | |
|----------|-----|--------------------|----------------|----------------------------|----------------------------|----------------------|------------|-------|------|------|------|-------------|
| | | Secondary #1 | RMS | | | | RMS | RMS | A | B | C | D |
| 260A | 22 | 400V C.T. @ 40ma. | 6.3V C.T. @ 1A | - | - | 1 | 3.25 | 2.00 | 2.00 | 2.81 | - | 0.19 |
| 260A6 | 57 | 740V C.T. @ 60ma. | 6.3V C.T. @ 2A | - | - | See PDF | 2.5 | 2.155 | 3 | - | - | - |
| 260C | 65 | 500V C.T @ 85ma.. | 5V @ 2A | 6.3V C.T. @ 2A | - | 1 | 4.03 | 2.65 | 2.62 | 3.56 | - | 0.19 |
| 260E | 80 | 450V C.T. @ 115ma. | 5V @ 2A | 6.3V C.T. @ 3A | - | See PDF | 3.00 | 3.06 | 2.53 | 2.50 | 2.40 | 0.21 x 0.38 |
| 260G | 175 | 550V C.T. @ 230ma. | 5V @ 3A | 6.3V C.T. @ 5A | - | See PDF | 3.75 | 3.50 | 3.13 | 3.25 | 3.25 | 0.20 x 0.38 |
| 260J | 152 | 650V C.T. @ 173ma. | 5V @ 2A | 6.3V C.T. @ 4A | - | 2 | 3.75 | 3.13 | 3.13 | 3.12 | 2.75 | 0.22 x 0.56 |
| 260K | 197 | 650V C.T. @ 230ma. | 5V @ 3A | 6.3V C.T. @ 5A | - | 2 | 4.50 | 3.25 | 3.75 | 3.75 | 3.00 | 0.22 x 0.56 |
| 260M | 248 | 700V C.T. @ 288ma. | 5V @ 3A | 6.3V C.T. @ 5A | - | 2 | 4.50 | 3.25 | 3.75 | 3.75 | 3.00 | 0.22 x 0.56 |

Data subject to change without notice

