





RJ45 Connectors

PC4D0018P Series

8 Conductor, 8 Position Shielded Cat6a Plug with Load Bar



Interconnect Solutions Worldwide

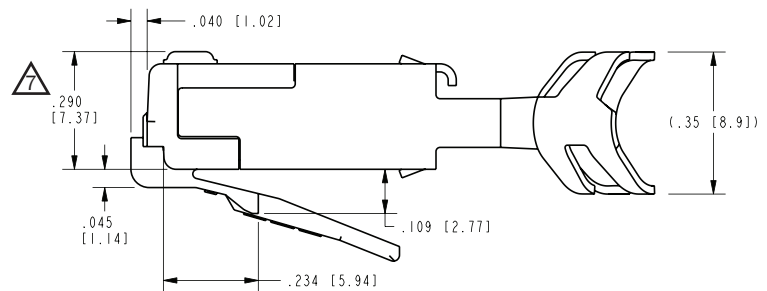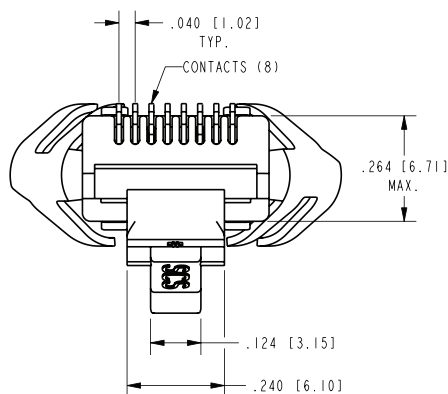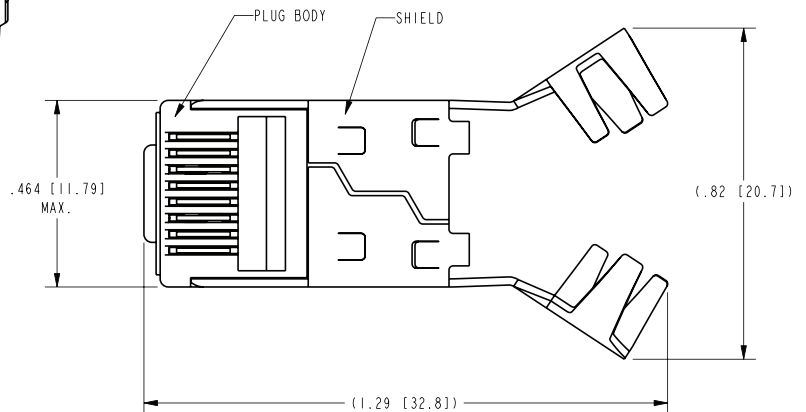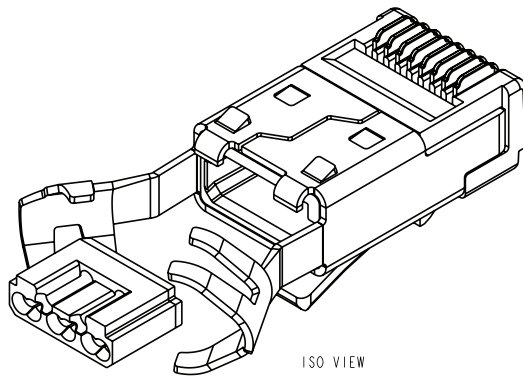

NOTES:

1. PLUG KIT CONSISTS OF:

PRE-INSERTED PLUG BODY WITH SHIELD LOAD BAR

2. MATERIALS:

PLUG BODY: CLEAR POLYCARBONATE, UL 94-V0

LOAD BAR: BLACK POLYCARBONATE, UL 94-V0

CONTACTS: COPPER ALLOY, SELECTIVE GOLD PLATING

SHIELD: COPPER ALLOY, NICKEL PLATE

3. CONTACTS TERMINATE SOLID OR STRANDED CONDUCTORS BETWEEN

.037 [0.94] TO .042 [1.07] OUTSIDE DIAMETER OF INSULATION.


4. CRIMP IS FOR CABLES WITH OUTSIDE NOMINAL DIAMETERS OF

.240 [6.10] TO .260 [6.60].

5. PRODUCT FULLY TESTED FOR CAT 6A APPLICATIONS. CONTACT POLAMCO FOR TEST REPORTS.

6. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.

△ TERMINATED PLUG HEIGHT: .237 [6.02] ± .005 [0.13]



Tel: +44 (0)845 017 1545

DRAWING NOT TO SCALE
DIMENSIONS IN MM

www.polamco.com

THIS DRAWING IS THE PROPERTY OF POLAMCO LTD AND MUST NOT BE USED FOR COMMERCIAL PURPOSES WITHOUT WRITTEN CONSENT OF THE COMPANY

P16026-ISS3