

CMSH1-40HE CMSH1-100HE  
CMSH1-60HE CMSH1-150HE  
CMSH1-80HE CMSH1-200HE

**SURFACE MOUNT SILICON  
SCHOTTKY RECTIFIERS  
1.0 AMP, 40 THRU 200 VOLT**



**SMA CASE**



[www.centralemi.com](http://www.centralemi.com)

#### DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMSH1-40HE series 1.0 Amp surface mount silicon Schottky rectifier is a highly efficient component designed for use in all types of commercial, industrial, entertainment, computer, and automotive applications.

**MARKING CODE: SEE MARKING CODE TABLE ON FOLLOWING PAGE**

#### FEATURES:

- High reliability
- High efficiency Schottky rectifier
- 40V to 200V range
- Low leakage current
- Low  $V_F$

**MAXIMUM RATINGS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

|                                                | SYMBOL         | CMSH1 |       |       |             |        |        | UNITS              |
|------------------------------------------------|----------------|-------|-------|-------|-------------|--------|--------|--------------------|
|                                                |                | -40HE | -60HE | -80HE | -100HE      | -150HE | -200HE |                    |
| Peak Repetitive Reverse Voltage                | $V_{RRM}$      | 40    | 60    | 80    | 100         | 150    | 200    | V                  |
| DC Blocking Voltage                            | $V_R$          | 40    | 60    | 80    | 100         | 150    | 200    | V                  |
| RMS Reverse Voltage                            | $V_{R(RMS)}$   | 28    | 42    | 56    | 70          | 105    | 140    | V                  |
| Average Forward Current                        | $I_O$          |       |       |       | 1.0         |        |        | A                  |
| Peak Forward Surge Current, $t_p=8.3\text{ms}$ | $I_{FSM}$      |       |       |       | 30          |        |        | A                  |
| Power Dissipation                              | $P_D$          |       |       |       | 1.4         |        |        | W                  |
| Operating and Storage Junction Temperature     | $T_J, T_{stg}$ |       |       |       | -65 to +150 |        |        | $^\circ\text{C}$   |
| Thermal Resistance                             | $\theta_{JA}$  |       |       |       | 89          |        |        | $^\circ\text{C/W}$ |
| Thermal Resistance                             | $\theta_{JL}$  |       |       |       | 30          |        |        | $^\circ\text{C/W}$ |

**ELECTRICAL CHARACTERISTICS:** ( $T_A=25^\circ\text{C}$  unless otherwise noted)

| SYMBOL | TEST CONDITIONS                                    | TYP  | MAX  | UNITS         |
|--------|----------------------------------------------------|------|------|---------------|
| $I_R$  | $V_R=\text{Rated } V_{RRM}$                        |      | 50   | $\mu\text{A}$ |
| $I_R$  | $V_R=\text{Rated } V_{RRM}, T_A=100^\circ\text{C}$ |      | 20   | mA            |
| $V_F$  | $I_F=1.0\text{A}$ (CMSH1-40HE)                     | 0.69 | 0.70 | V             |
| $V_F$  | $I_F=1.0\text{A}$ (CMSH1-60HE)                     | 0.69 | 0.74 | V             |
| $V_F$  | $I_F=1.0\text{A}$ (CMSH1-80HE, -100HE)             | 0.77 | 0.80 | V             |
| $V_F$  | $I_F=1.0\text{A}$ (CMSH1-150HE)                    | 0.80 | 0.90 | V             |
| $V_F$  | $I_F=1.0\text{A}$ (CMSH1-200HE)                    | 0.81 | 0.90 | V             |
| $C_J$  | $V_R=0, f=1.0\text{MHz}$ (CMSH1-40HE, 60HE)        | 116  |      | pF            |
| $C_J$  | $V_R=0, f=1.0\text{MHz}$ (CMSH1-80HE, 100HE)       | 104  |      | pF            |
| $C_J$  | $V_R=0, f=1.0\text{MHz}$ (CMSH1-150HE)             | 86   |      | pF            |
| $C_J$  | $V_R=0, f=1.0\text{MHz}$ (CMSH1-200HE)             | 62.5 |      | pF            |


R3 (24-November 2015)

CMSH1-40HE CMSH1-100HE  
 CMSH1-60HE CMSH1-150HE  
 CMSH1-80HE CMSH1-200HE

**SURFACE MOUNT SILICON  
 SCHOTTKY RECTIFIERS  
 1.0 AMP, 40 THRU 200 VOLT**



# **SMA CASE - MECHANICAL OUTLINE**

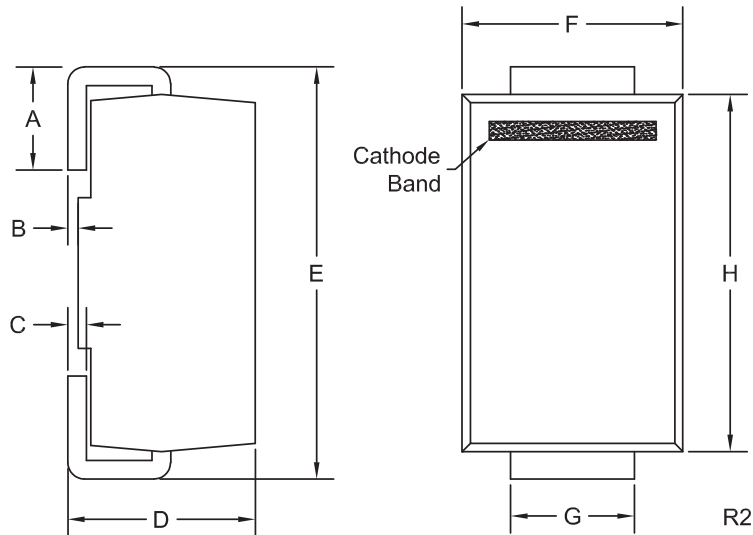

| DEVICE      | MARKING CODE |
|-------------|--------------|
| CMSH1-40HE  | CS40HE       |
| CMSH1-60HE  | CS60HE       |
| CMSH1-80HE  | CS80HE       |
| CMSH1-100HE | CS100HE      |
| CMSH1-150HE | CS150HE      |
| CMSH1-200HE | CS200HE      |

| SYMBOL | INCHES |       | MILLIMETERS |      |
|--------|--------|-------|-------------|------|
|        | MIN    | MAX   | MIN         | MAX  |
| A      | 0.030  | 0.060 | 0.76        | 1.52 |
| B      | 0.004  | 0.008 | 0.10        | 0.20 |
| C      | 0.006  | 0.012 | 0.15        | 0.30 |
| D      | 0.078  | 0.103 | 1.98        | 2.62 |
| E      | 0.188  | 0.220 | 4.78        | 5.59 |
| F      | 0.090  | 0.115 | 2.29        | 2.92 |
| G      | 0.050  | 0.070 | 1.27        | 1.78 |
| H      | 0.157  | 0.181 | 3.99        | 4.60 |

SMA (REV: R2)

R3 (24-November 2015)


|            |             |
|------------|-------------|
| CMSH1-40HE | CMSH1-100HE |
| CMSH1-60HE | CMSH1-150HE |
| CMSH1-80HE | CMSH1-200HE |

**SURFACE MOUNT SILICON  
SCHOTTKY RECTIFIERS  
1.0 AMP, 40 THRU 200 VOLT**




## TYPICAL ELECTRICAL CHARACTERISTICS


Leakage Current for CMSH1-40HE

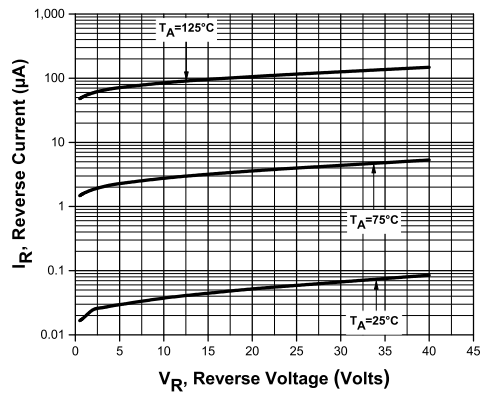


Leakage Current for CMSH1-60HE

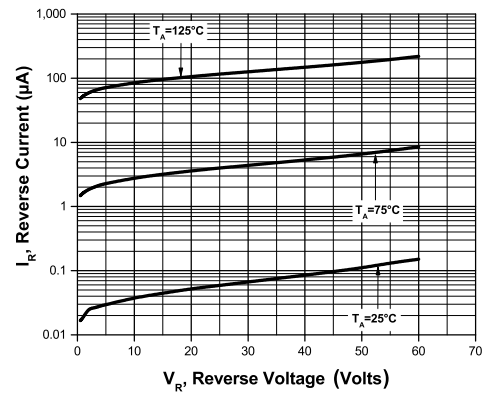

Leakage Current for CMSH1-80HE

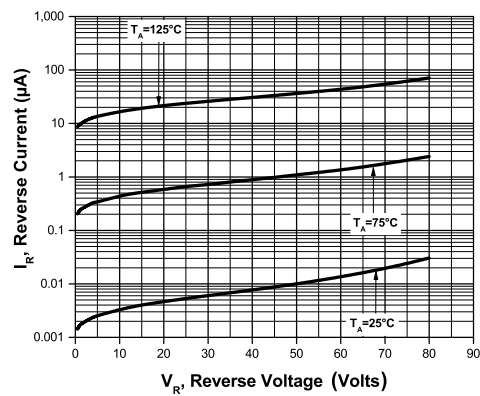

Leakage Current for CMSH1-100HE

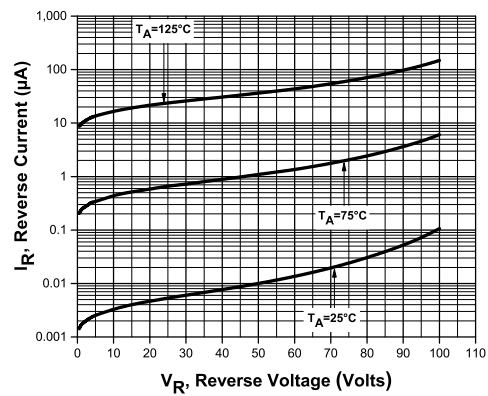

R3 (24-November 2015)


CM SH1-40HE C M SH1-100HE  
 C M SH1-60HE C M SH1-150HE  
 C M SH1-80HE C M SH1-200HE

SURFACE MOUNT SILICON  
 SCHOTTKY RECTIFIERS  
 1.0 AMP, 40 THRU 200 VOLT




## TYPICAL ELECTRICAL CHARACTERISTICS


Leakage Current for C M SH1-150HE

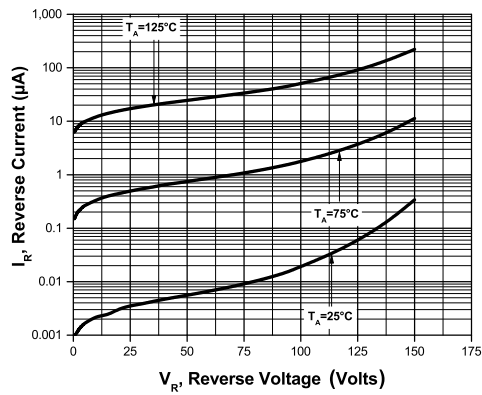


Leakage Current for C M SH1-200HE

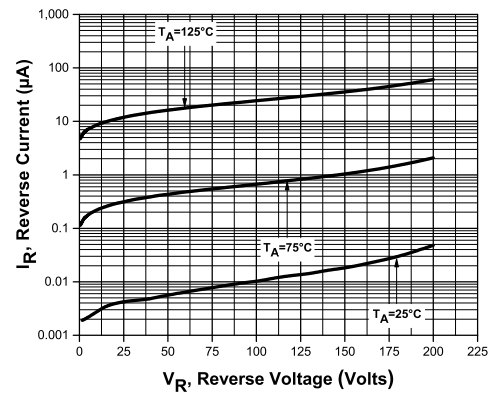

Forward Voltage for C M SH1-40HE

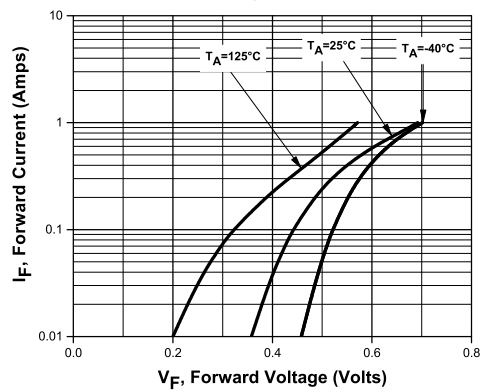

Forward Voltage for C M SH1-60HE

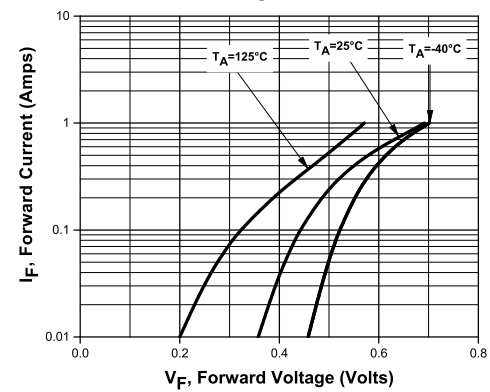





R3 (24-November 2015)

|            |             |
|------------|-------------|
| CMSH1-40HE | CMSH1-100HE |
| CMSH1-60HE | CMSH1-150HE |
| CMSH1-80HE | CMSH1-200HE |

**SURFACE MOUNT SILICON  
SCHOTTKY RECTIFIERS  
1.0 AMP, 40 THRU 200 VOLT**



## TYPICAL ELECTRICAL CHARACTERISTICS

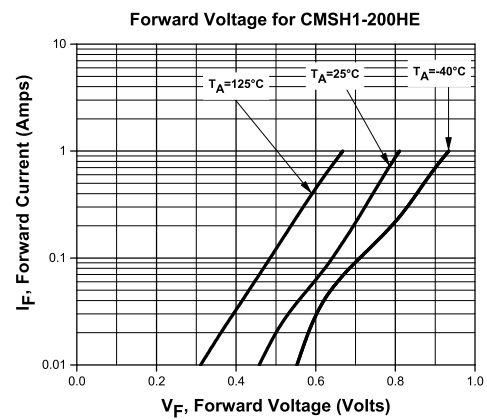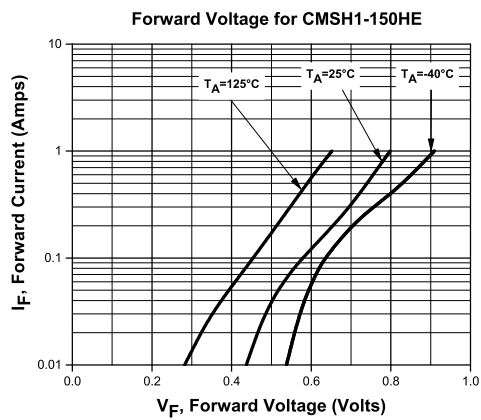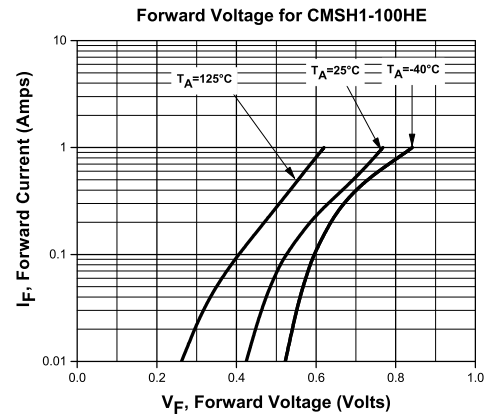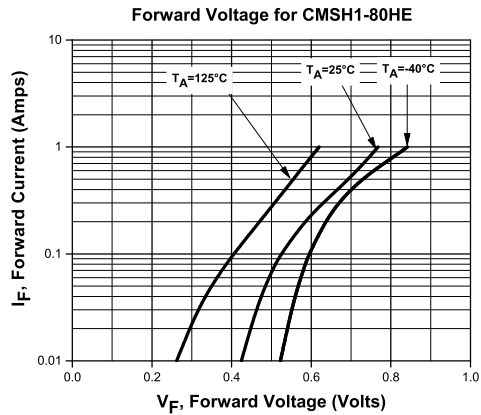





R3 (24-November 2015)

|            |             |
|------------|-------------|
| CMSH1-40HE | CMSH1-100HE |
| CMSH1-60HE | CMSH1-150HE |
| CMSH1-80HE | CMSH1-200HE |

**SURFACE MOUNT SILICON  
SCHOTTKY RECTIFIERS  
1.0 AMP, 40 THRU 200 VOLT**



## TYPICAL ELECTRICAL CHARACTERISTICS

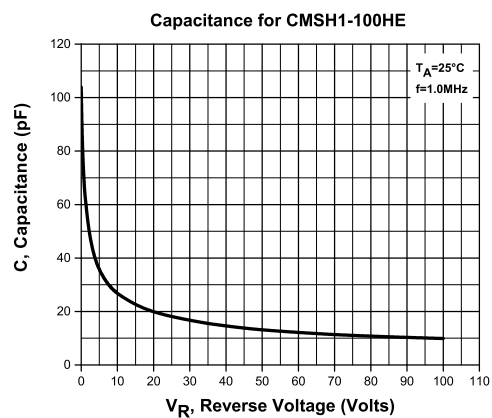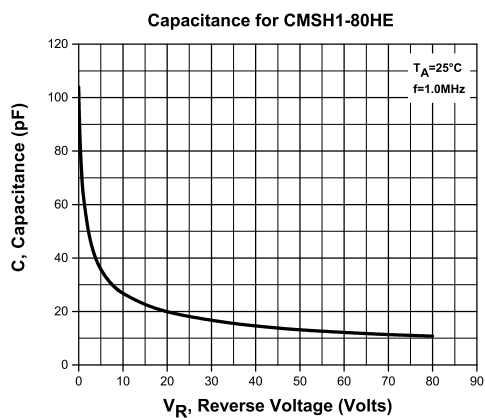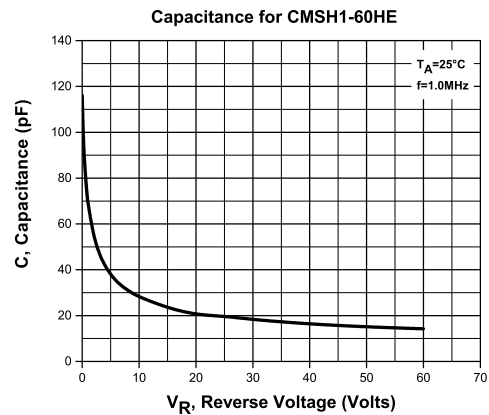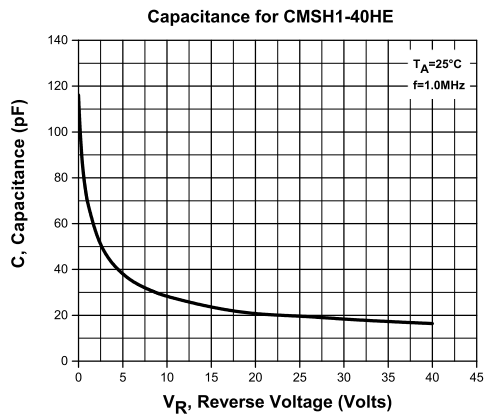

R3 (24-November 2015)


|            |             |
|------------|-------------|
| CMSH1-40HE | CMSH1-100HE |
| CMSH1-60HE | CMSH1-150HE |
| CMSH1-80HE | CMSH1-200HE |

**SURFACE MOUNT SILICON  
SCHOTTKY RECTIFIERS  
1.0 AMP, 40 THRU 200 VOLT**




## TYPICAL ELECTRICAL CHARACTERISTICS


Capacitance for CMSH1-150HE

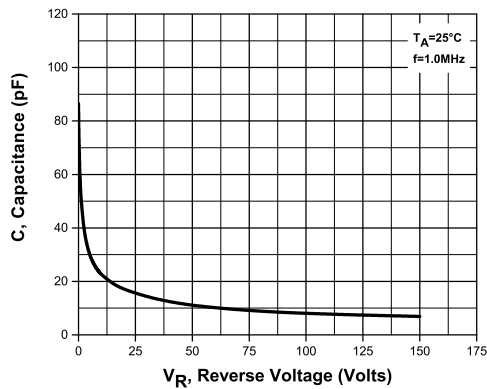


Capacitance for CMSH1-200HE

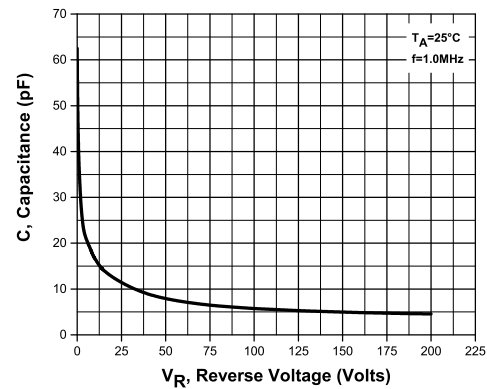

Current Derating

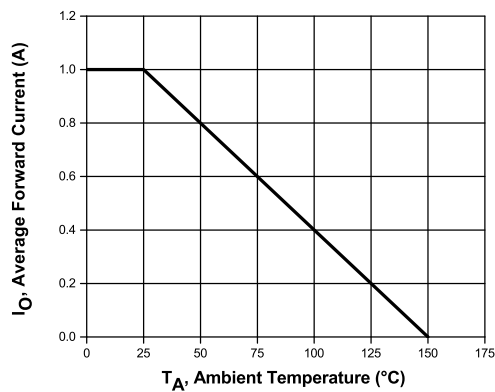

Power Derating

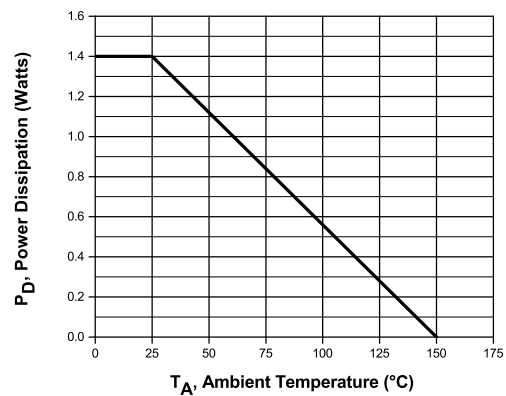

R3 (24-November 2015)

## OUTSTANDING SUPPORT AND SUPERIOR SERVICES



---

### PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

---

### DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2<sup>nd</sup> day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

---

### REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

---

### CONTACT US

#### Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.  
145 Adams Avenue  
Hauppauge, NY 11788 USA  
Main Tel: (631) 435-1110  
Main Fax: (631) 435-1824  
Support Team Fax: (631) 435-3388  
[www.centrasemi.com](http://www.centrasemi.com)

**Worldwide Field Representatives:**  
[www.centrasemi.com/wwreps](http://www.centrasemi.com/wwreps)

**Worldwide Distributors:**  
[www.centrasemi.com/wwdistributors](http://www.centrasemi.com/wwdistributors)

---

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: [www.centrasemi.com/terms](http://www.centrasemi.com/terms)