

47 μ F AC-Coupling Capacitor 4in-2out Video Driver with Isolation Amplifier

■GENERAL DESCRIPTION

NJW1342 is 47 μ F AC-Coupling Capacitor 4in-2out Video Driver with Isolation Amplifier. It can remove common mode noise because internal Isolation amplifier. It can reduce (47 μ F) usual output capacitor by NJRC original "ASC(Advanced SAG Correction)", and contributes to space saving.

NJW1342 is the best for the switch of the video signal of car AV.

■PACKAGE OUTLINE




NJW1342V

■FEATURES

- Operating Voltage 3.0 to 6.0V
- Small output coupling capacitor 47 μ F
- Internal Isolation Amplifier
- 4-inputi 2-outout selector
- Internal 6dB Amplifier, 75 Ω Driver
- I2C Bus Interface
- Bi-CMOS Technology
- Package Outline SSOP32

■BLOCK DIAGRAM

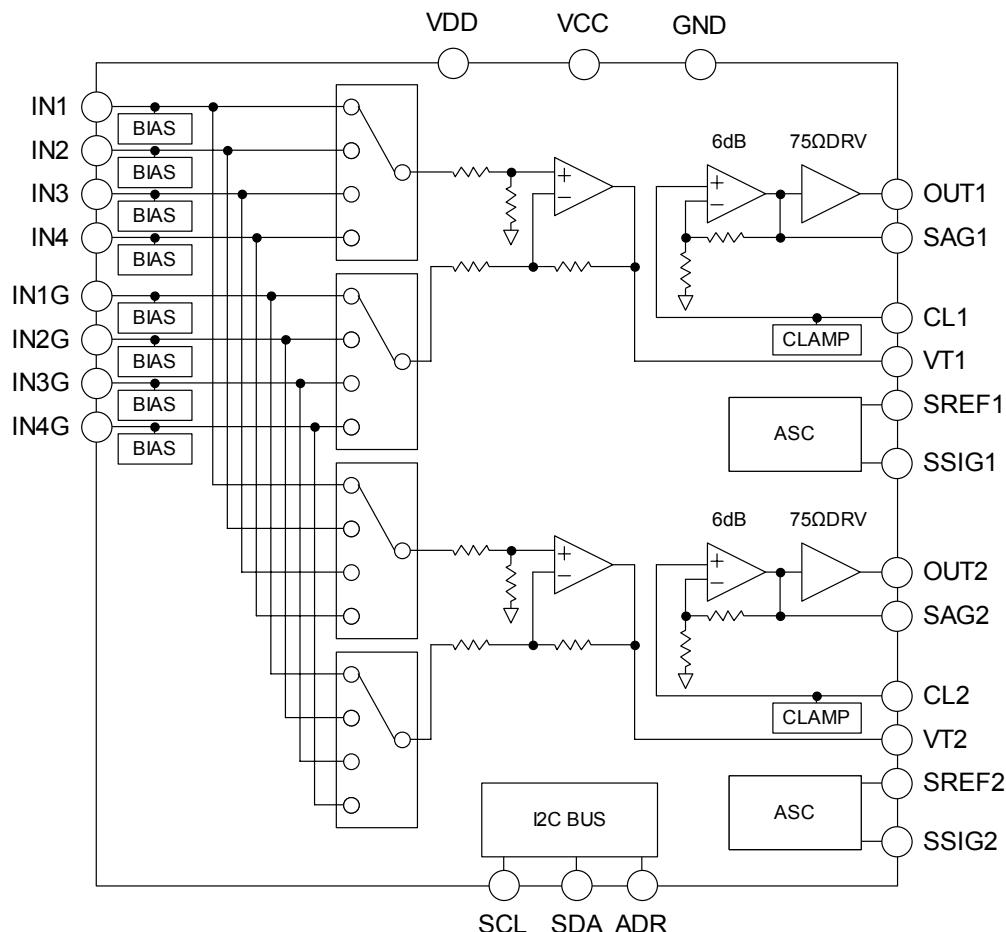

NJW1342

■PIN CONFIGURATION

1	32	1. VCC	17. SDA
2	31	2. IN1	18. SCL
3	30	3. IN1G	19. SREF2
4	29	4. GND	20. SSIG2
5	28	5. IN2	21. SAG2
6	27	6. IN2G	22. OUT2
7	26	7. NC	23. CL2
8	25	8. IN3	24. VT2
9	24	9. IN3G	25. VCC
10	23	10. VCC	26. GND
11	22	11. IN4	27. VT1
12	21	12. IN4G	28. CL1
13	20	13. NC	29. OUT1
14	19	14. VDD	30. SAG1
15	18	15. ADR	31. SSIG1
16	17	16. GND	32. SREF1

■ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺	7.0	V
Power Dissipation	P _D	1100(note1)	mW
Operating Temperature Range	T _{opr}	-40 to +85	°C
Storage Temperature Range	T _{stg}	-40 to +150	°C

(Note1) At on a board of EIA/JEDEC specification. (114.3 x 76.2 x 1.6mm Two layers, FR-4)

■RECOMMENDED OPERATING CONDITIONS (Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating voltage	V _{opr}		3.0	-	5.5	V


■ELECTRICAL CHARACTERISTICS(VCC,VDD=5V, RL=150ohm,Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Supply Current	I _{cc1}	No signal	-	60	100	mA
Supply Current	I _{cc2}	OUT1:active, OUT2:power save	-	30	60	mA
Supply Current	I _{cc3}	OUT1:power save, OUT2:active	-	30	60	mA
Supply Current	I _{cc4}	V _{DD}	-	0.5	1	mA
Supply Current at Power Save Mode	I _{save}	Power save mode	-	2	4	mA
Maximum Output Level	V _{om}	V _{in} =100kHz,sin-signal,THD=1%,	2.0	2.2	-	V _{p-p}
Voltage Gain	G _v	V _{in} =1MHz, 1.0V _{p-p} sin-signal	5.5	6.0	6.5	dB
Frequency Characteristic	G _f	V _{in} =10MHz / 1MHz ,1.0V _{pp} sin-signal	-1.0	0	1.0	dB
Common Mode Noise Ratio	CMR	V _{in} =20KHz,V _{in} =1V _{pp}	-	-55	-	dB
Cross-talk	CT-1	V _{in} =4.43MHz, 1.0V _{p-p} sin-signal	-	-60	-	dB
Differential Gain	DG	V _{in} =1.0V _{p-p} 10step video-signal	-	0.5	-	%
Differential Phase	DP	V _{in} =1.0V _{p-p} 10step video-signal	-	0.5	-	deg

■PORT

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
ADR Input Voltage High Level	V _{ADRH}		2.2			V _{cc}
ADR Input Voltage Low Level	V _{ADRL}		0	-	1.0	V

■TIMING on the I²C BUS (SDA, SCL)

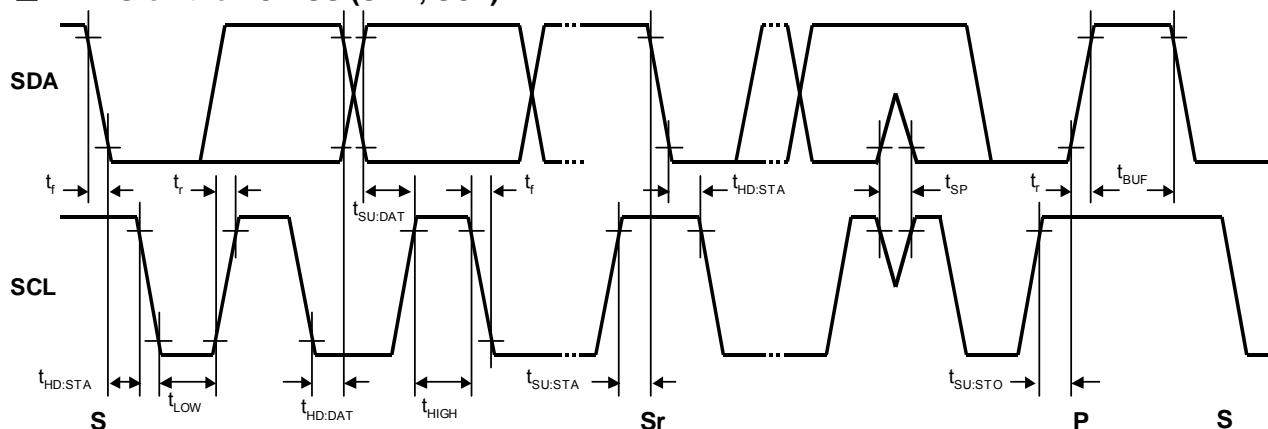

■CHARACTERISTICS OF BUS LINES (SDA, SCL) FOR I²C BUS DEVICES

I²C BUS Load Conditions

STANDARD MODE : Pull up resistance 4k Ω (Connected to +3.3V), Load capacitance 200pF (Connected to GND)
 FAST MODE : Pull up resistance 4k Ω (Connected to +3.3V), Load capacitance 50pF (Connected to GND)


PARAMETER	SYM BOL	Standard mode			Fast mode			UNI T
		MIN.	TYP.	MAX	MIN.	TYP.	MAX.	
Low Level Input Voltage	V _{IL}	0.0	-	1.2	0.0	-	1.2	V
High Level Input Voltage	V _{IH}	2.4	-	5.0	2.4	-	5.0	V
Hysteresis of Schmitt Trigger Inputs	V _{hys}	-	-	-	0.25	-	-	V
Low level Output Voltage (3mA at SDA pin)	V _{OL}	0	-	0.4	0	-	0.4	V
Output Fall Time From V _{IHmin} to V _{ILmax} with a Bus Capacitance from 10pF to 400pF	t _{of}	-	-	250	20 +0.1C _b	-	250	ns
Pulse width of spikes which must be suppressed by the input filter	t _{SP}	-	-	-	0	-	50	ns
Input Current each I/O pin with an Input Voltage between 0.1 and 0.9V _{DDmax}	I _i	-10	-	10	-10	-	10	μ A
Capacitance for each I/O pin	C _i	-	-	10	-	-	10	pF
SCL Clock Frequency	f _{SCL}	-	-	100	-	-	400	kHz
Data Transfer Start Minimum Waiting Time	t _{HD:STA}	4.0	-	-	0.6	-	-	μ s
Low Level Clock Pulse Width	t _{LOW}	4.7	-	-	1.3	-	-	μ s
High Level Clock Pulse Width	t _{HIGH}	4.0	-	-	0.6	-	-	μ s
Minimum Start Preparation Waiting Time	t _{SU:STA}	4.7	-	-	0.6	-	-	μ s
Minimum Data Hold Time <small>(NOTE)</small>	t _{HD:DAT}	0.0	-	-	0.0	-	-	μ s
Minimum Data Preparation Time	t _{SU:DAT}	250	-	-	100	-	-	ns
Rise Time	t _r	-	-	1000	-	-	300	ns
Fall Time	t _f	-	-	300	-	-	300	ns
Minimum Stop Preparation Waiting Time	t _{SU:STO}	4.0	-	-	0.6	-	-	μ s
Data Change Minimum Waiting Time	t _{BUF}	4.7	-	-	1.3	-	-	μ s
Capacitive load for each bus line	C _b	-	-	400	-	-	400	pF
Noise Margin at the Low Level	V _{nL}	0.5	-	-	0.5	-	-	V
Noise Margin at the High Level	V _{nH}	1	-	-	1	-	-	V

C_b ; total capacitance of one bus line in pF.

NOTE). Please hold the Data Hold Time (t_{HD:DAT}) to 300ns or more to avoid status of unstable at SCL falling edge.

■ DEFINITION OF I²C REGISTER

◆ I²C BUS FORMAT

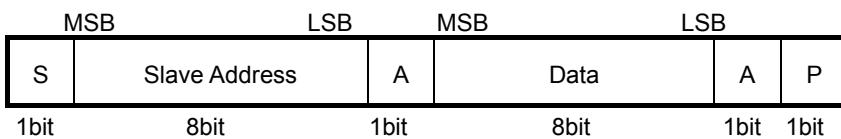

S: Starting Term

A: Acknowledge Bit

P: Ending Term

◆ SLAVE ADDRESS

MSB	0	0	1	0	0	0	ADR	LSB 0
-----	---	---	---	---	---	---	-----	----------

R/W=0: Receive Only

R/W=1: Data is not transmitted.

ADR : Set the Slave Address by "ADR" terminal.

◆ CONTROL REGISTER DEFAULT VALUE

Control register default values are as follows :

	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
Data	0	0	0	0	0	0	0	0

◆ INSTRUCTION CODE

	BIT							
	D7	D6	D5	D4	D3	D2	D1	D0
Data	OUT1 MUTE	OUT1 Select		NOT USE:0	OUT2 MUTE	OUT2 Select		NOT USE:0

◆ MUTE TABLE

MUTE	OUT1
D7	
0	MUTE OFF
1	MUTE ON

MUTE	OUT2
D3	
0	MUTE OFF
1	MUTE ON

MUTE OFF: Active mode

MUTE ON: Power save mode


NJW1342

♦VOUT SELECT TABLE







OUT1 Select			OUT1
D6	D5	D4	
0	0	0	VIN1
0	1	0	VIN2
1	0	0	VIN3
1	1	0	VIN4

OUT2Select			OUT2
D2	D1	D0	
0	0	0	VIN1
0	1	0	VIN2
1	0	0	VIN3
1	1	0	VIN4







■ TEST CIRCUIT

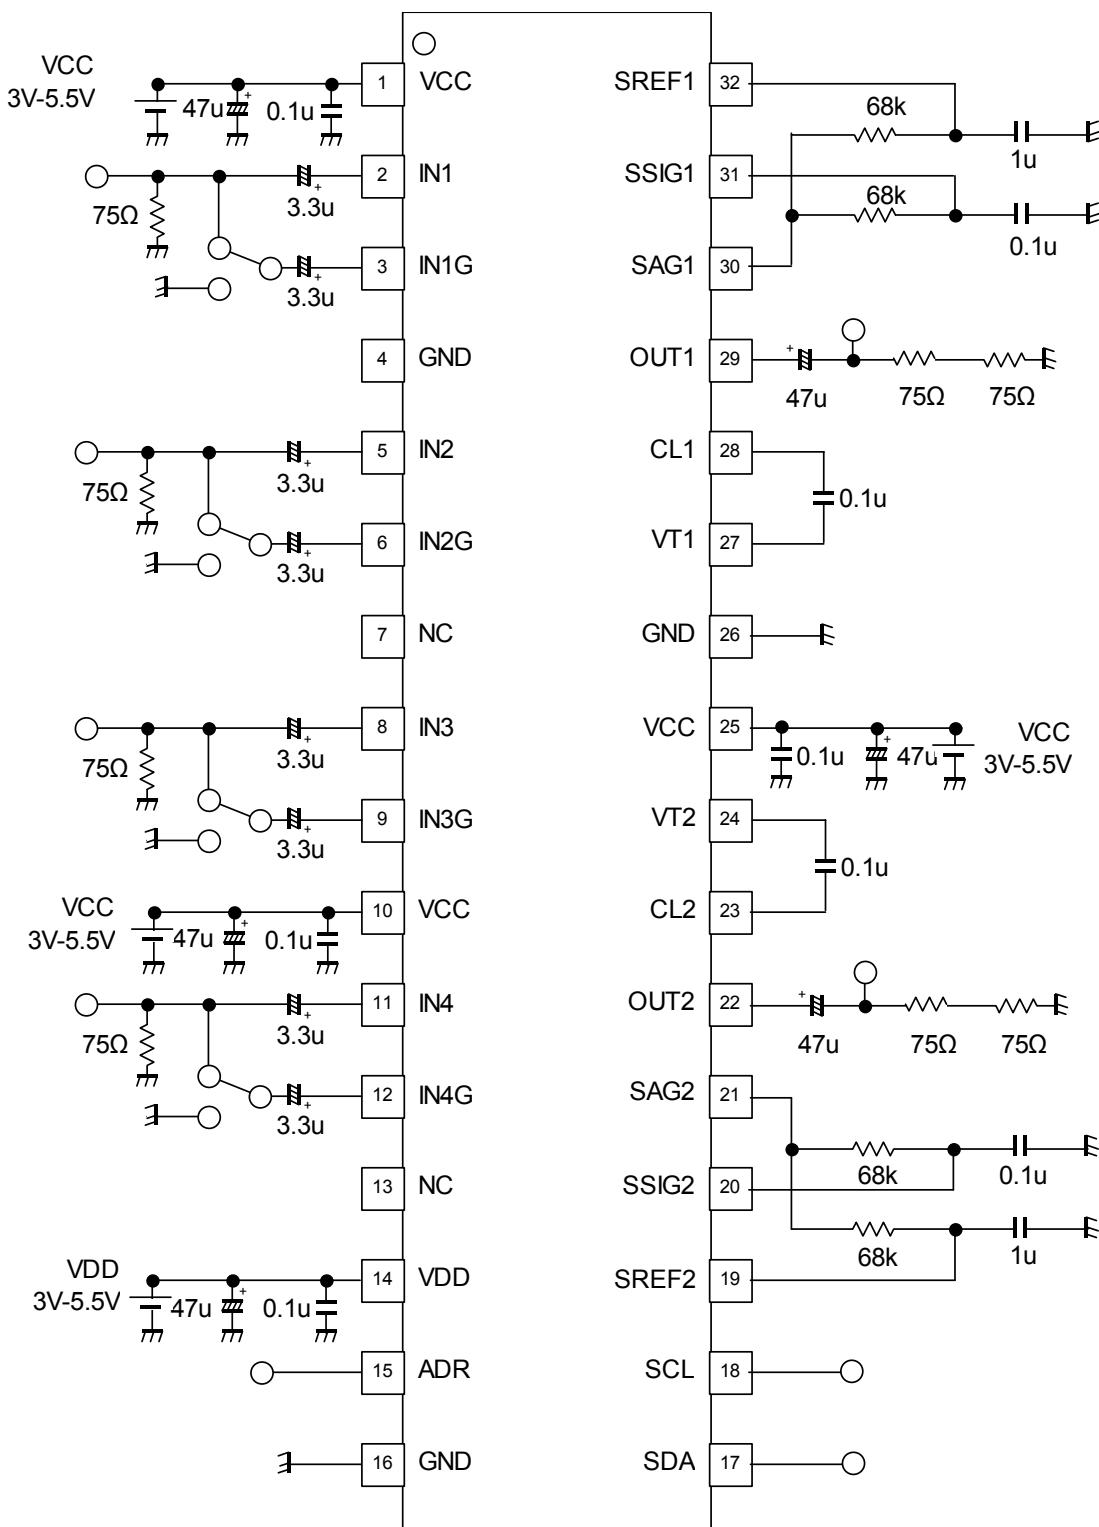







■TYPICAL CHARACTERISTICS

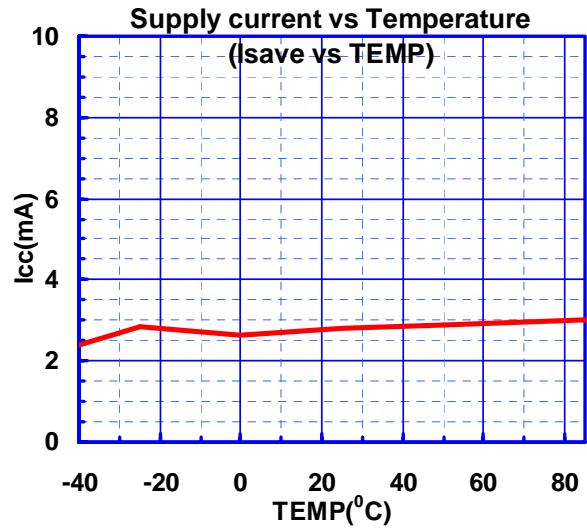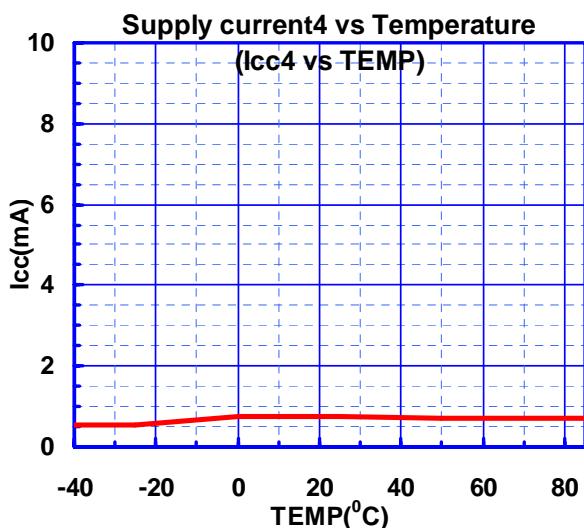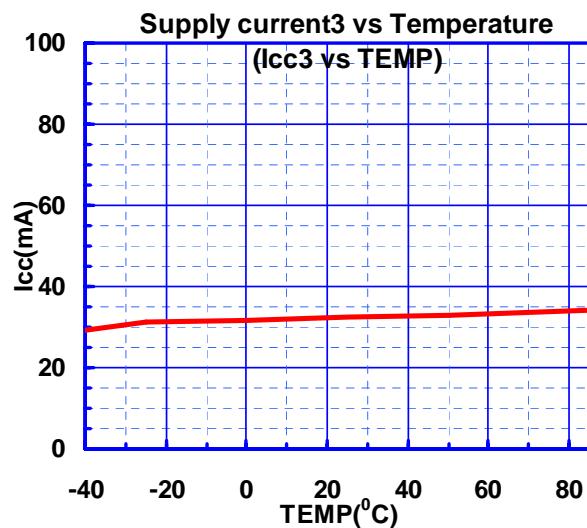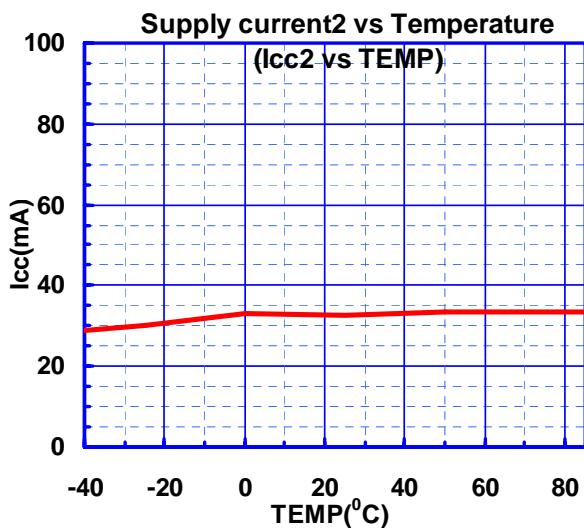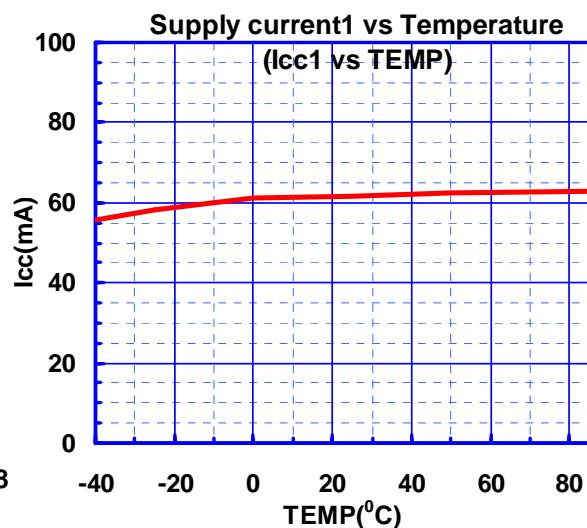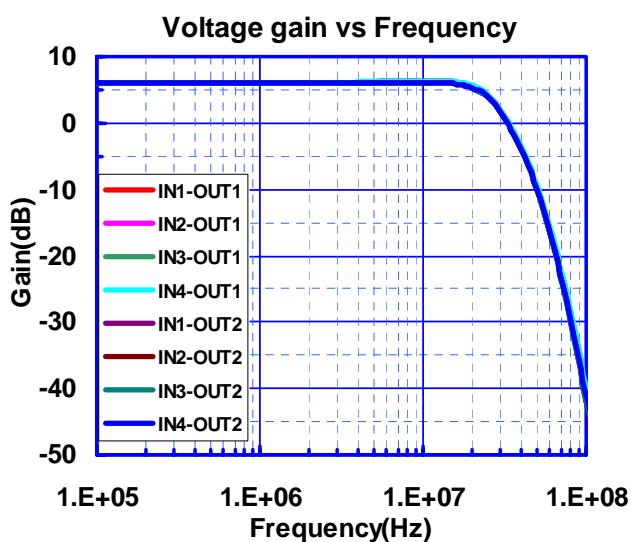







■TYPICAL CHARACTERISTICS

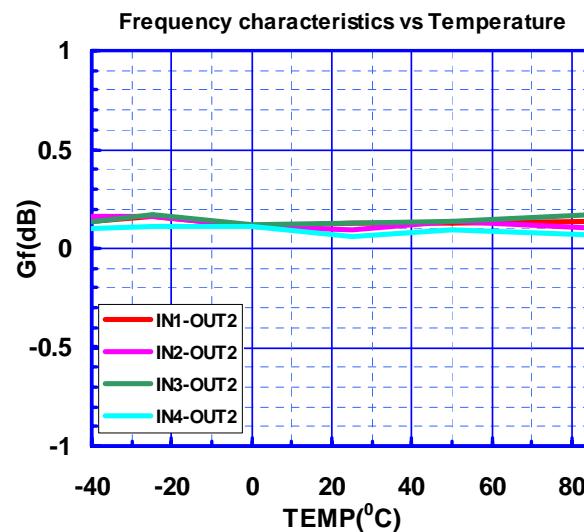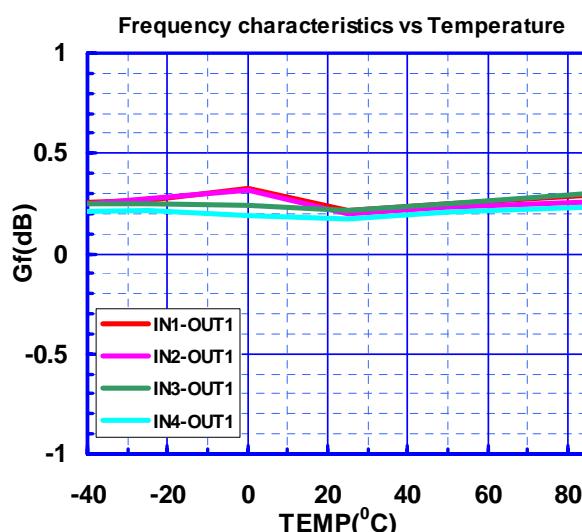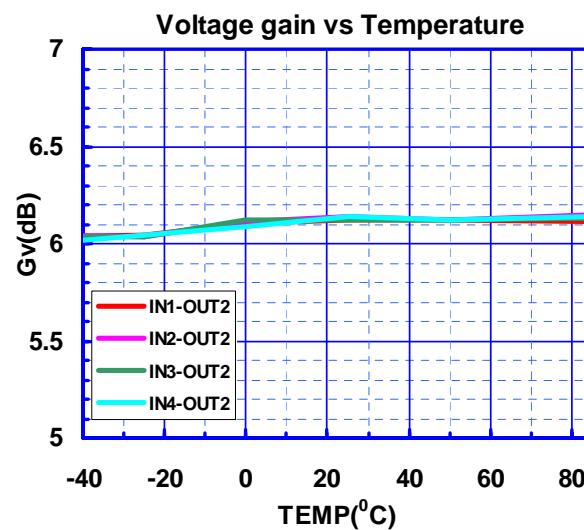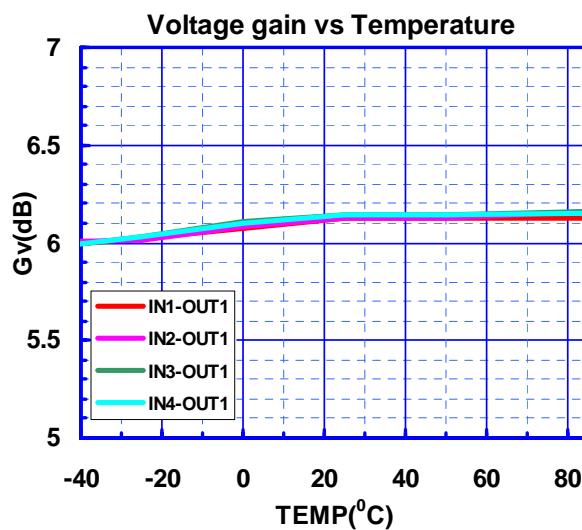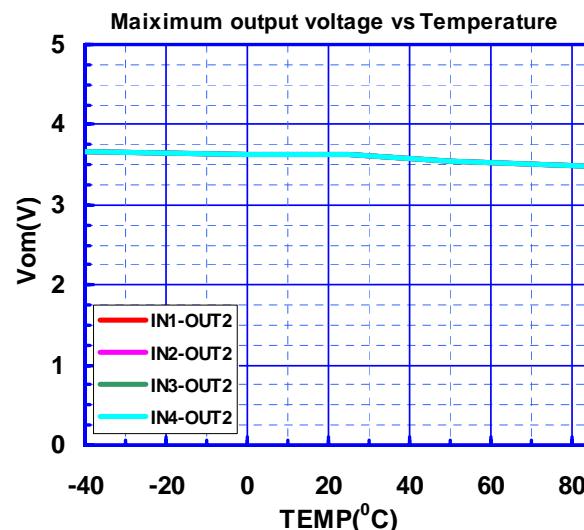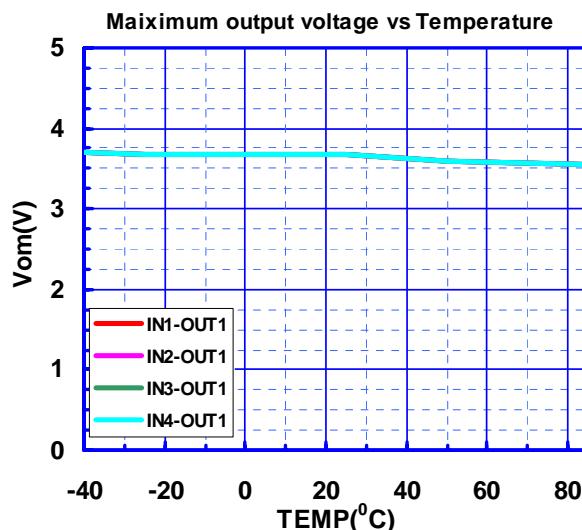





TYPICAL CHARACTERISTICS

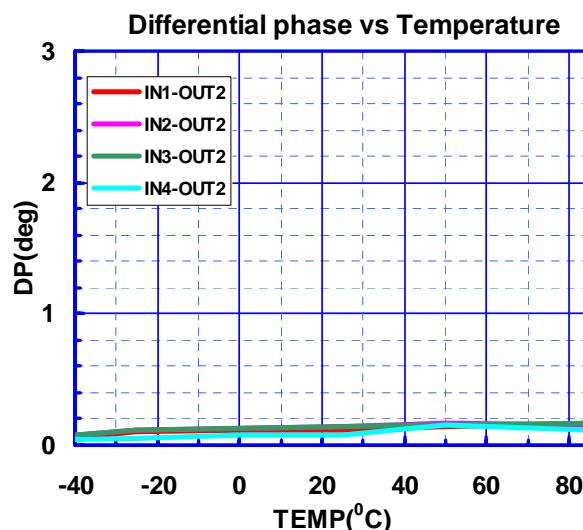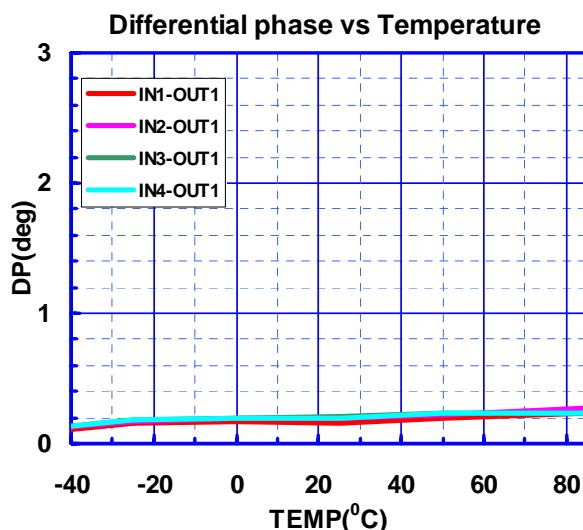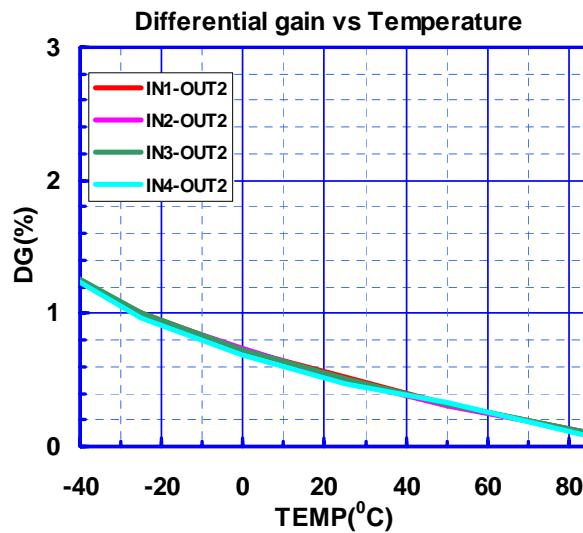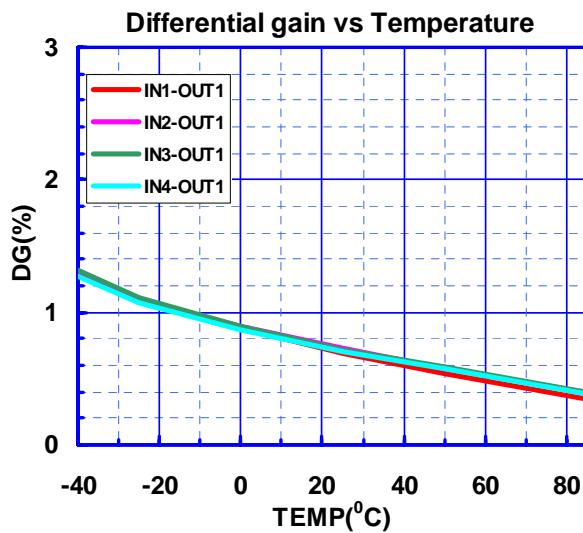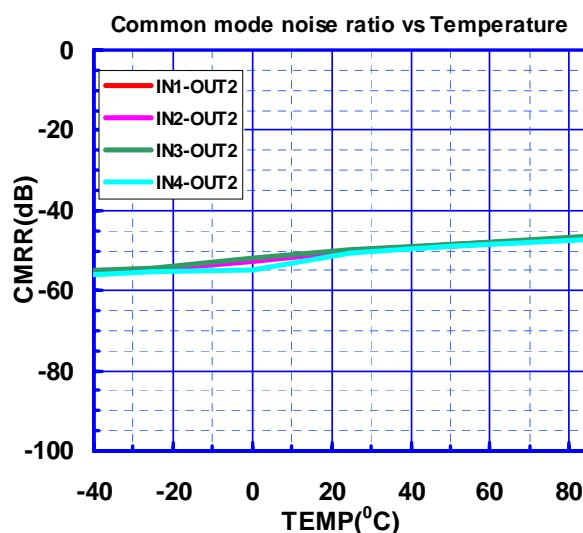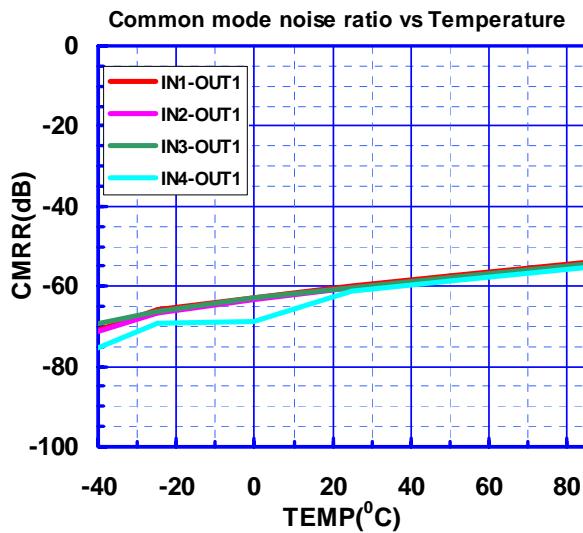






■TYPICAL CHARACTERISTICS

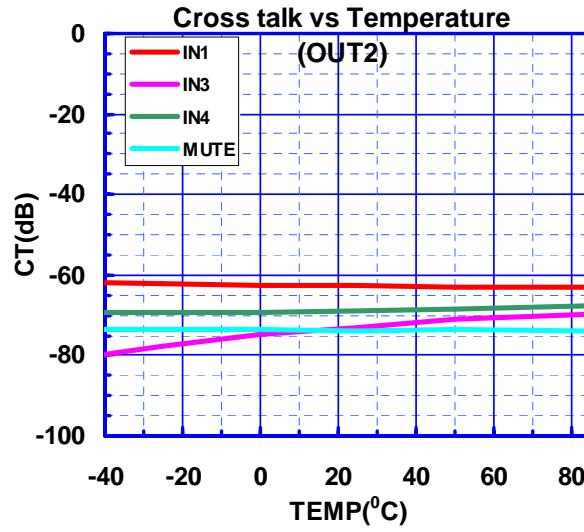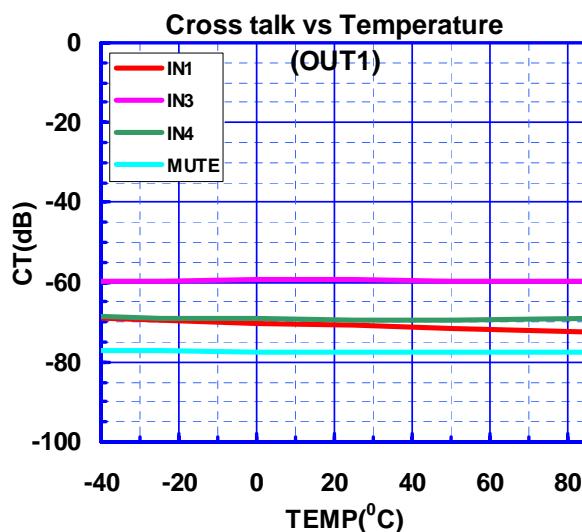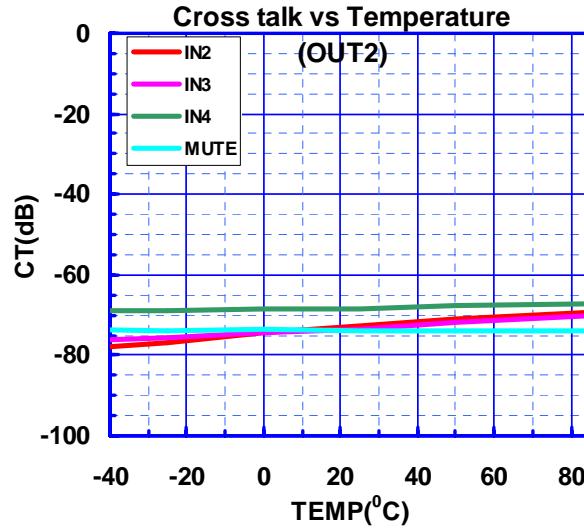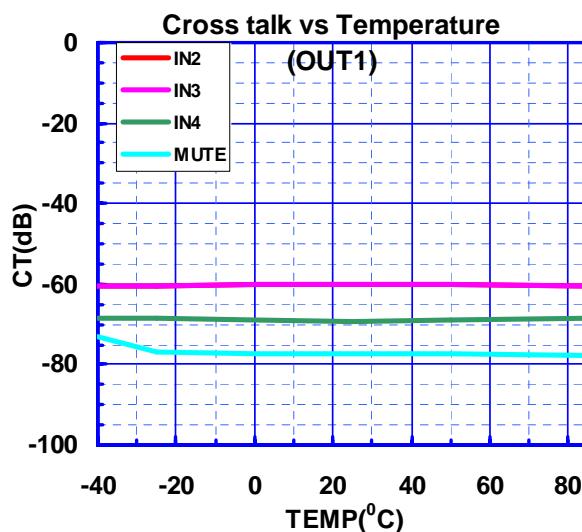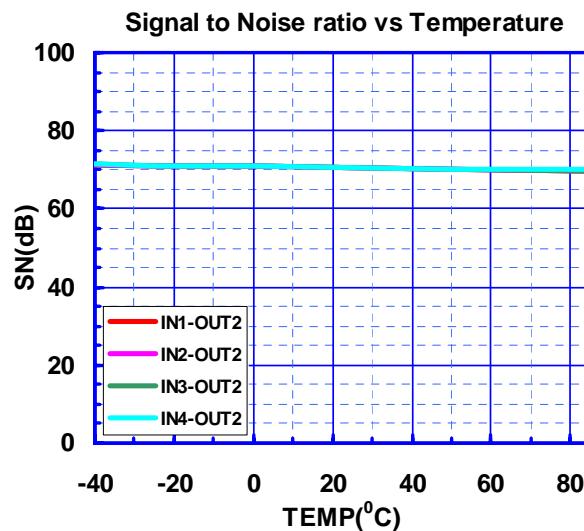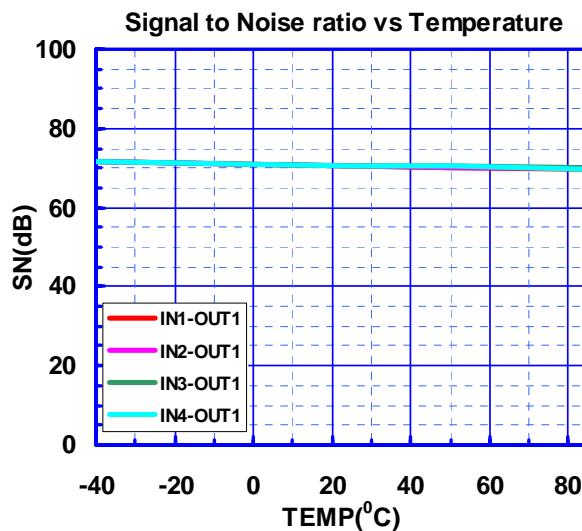







■TYPICAL CHARACTERISTICS

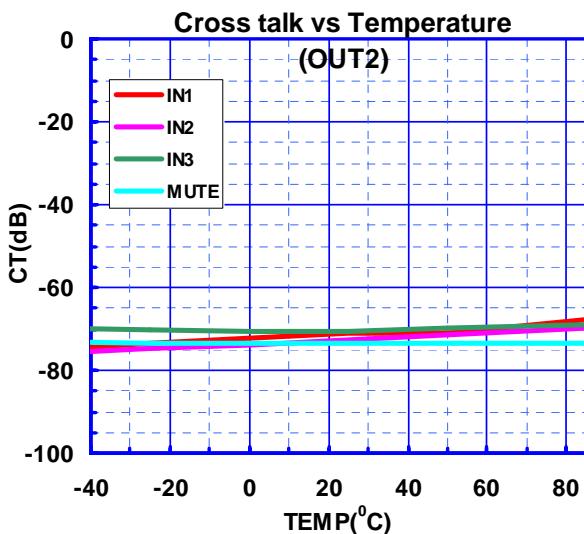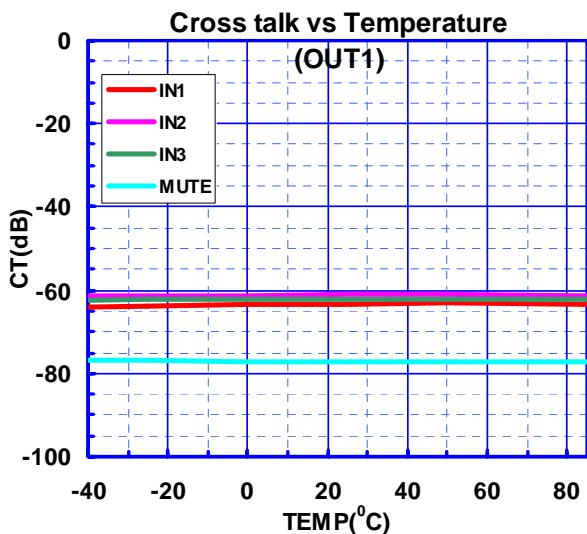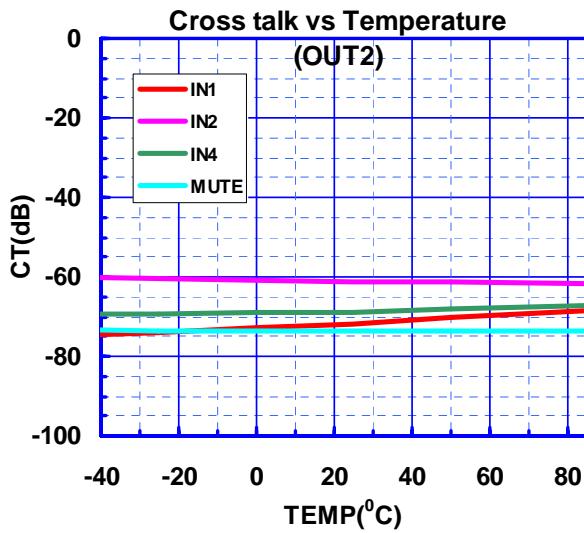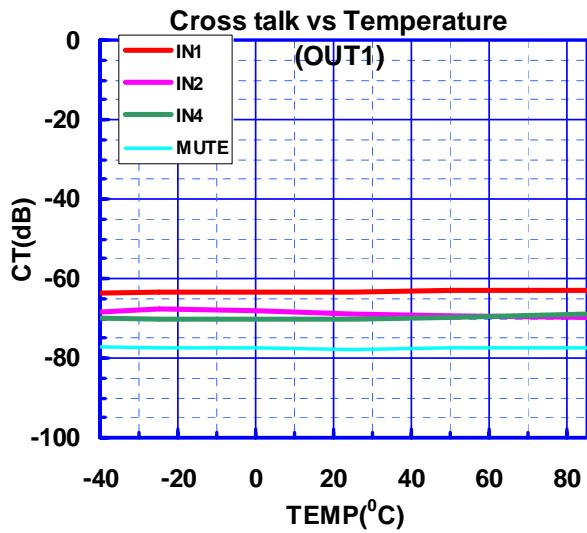







■TYPICAL CHARACTERISTICS

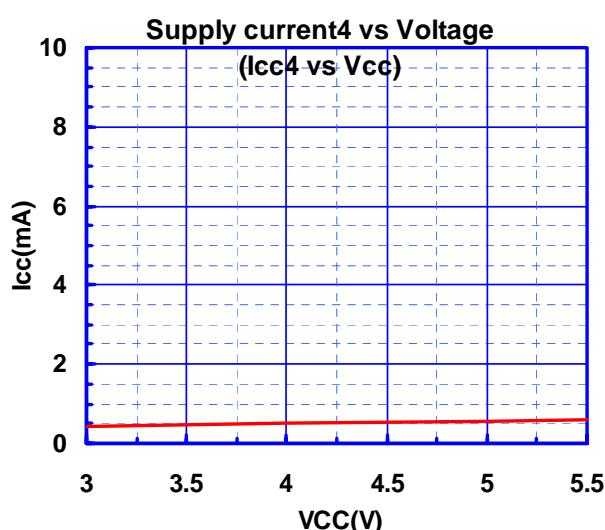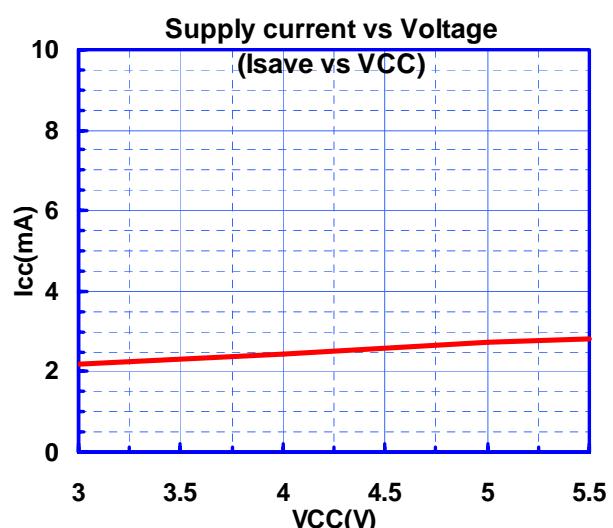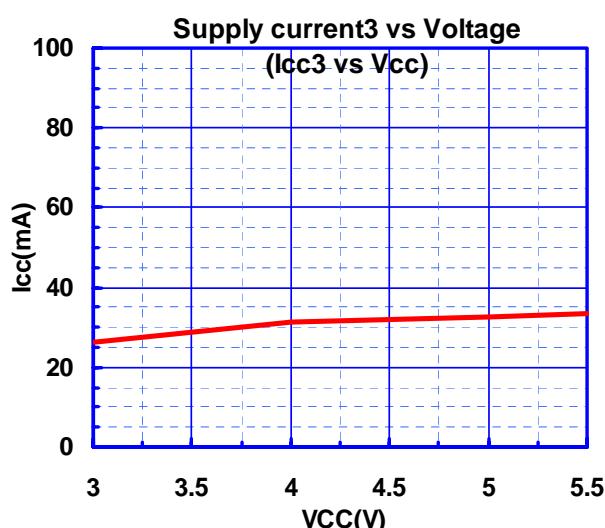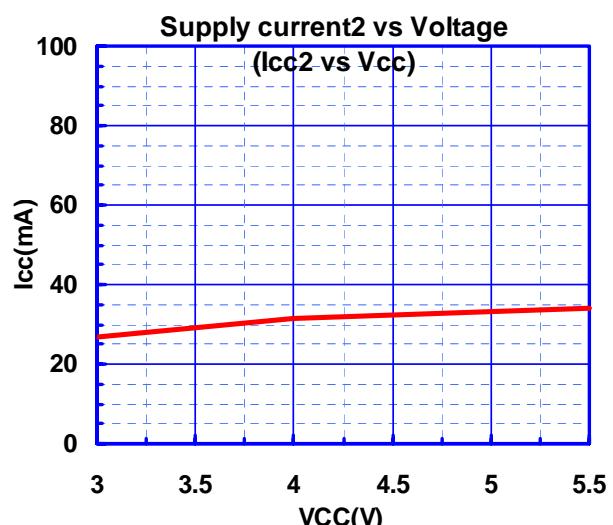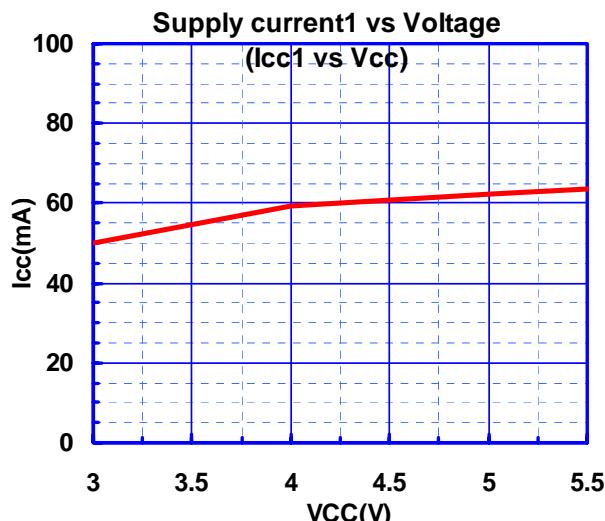







TYPICAL CHARACTERISTICS

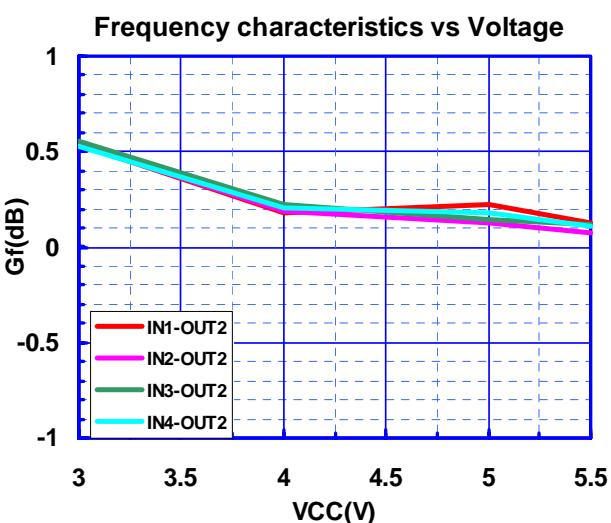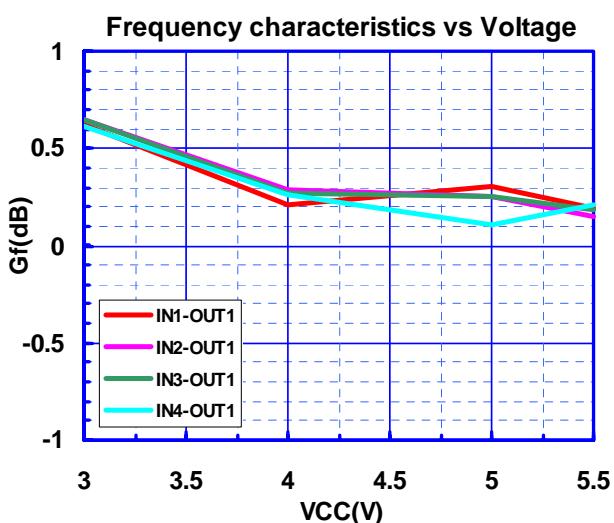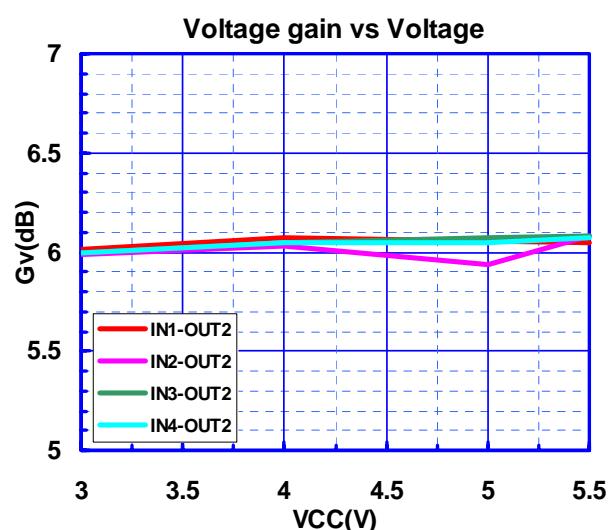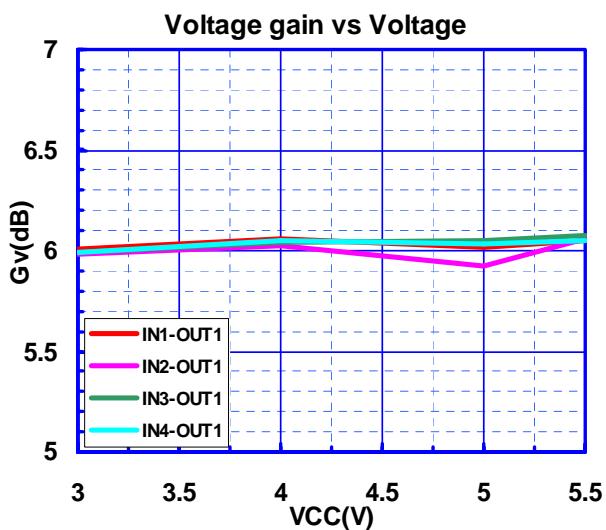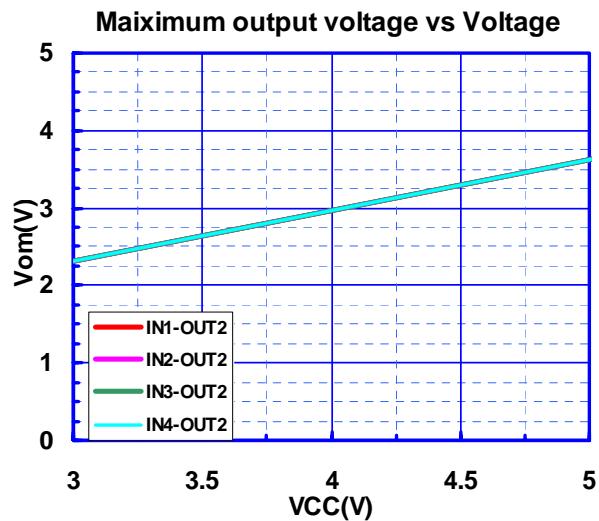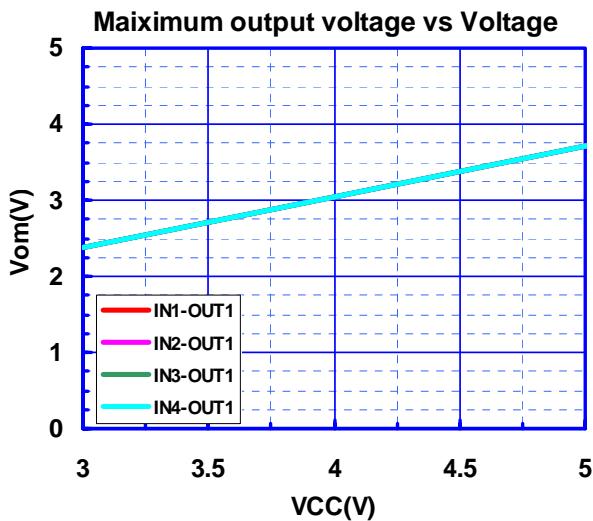





■TYPICAL CHARACTERISTICS

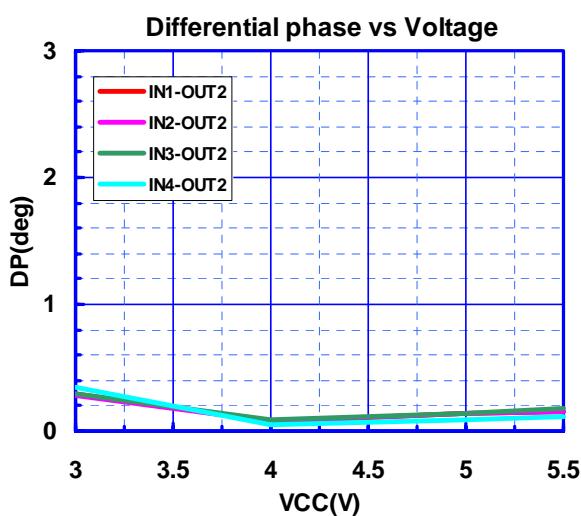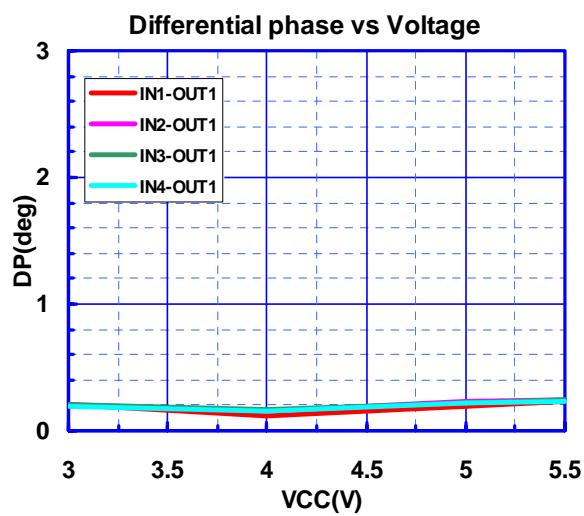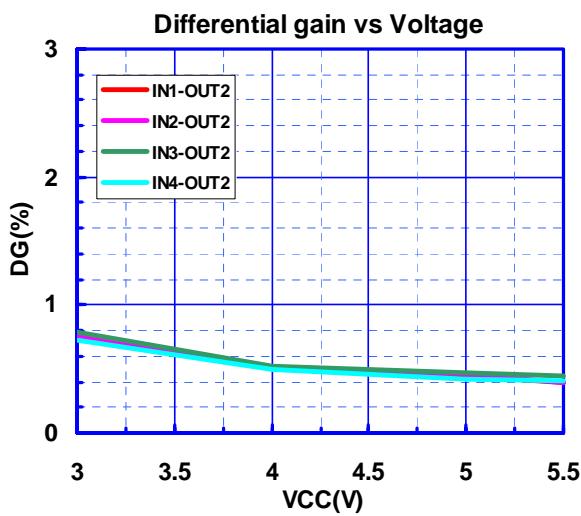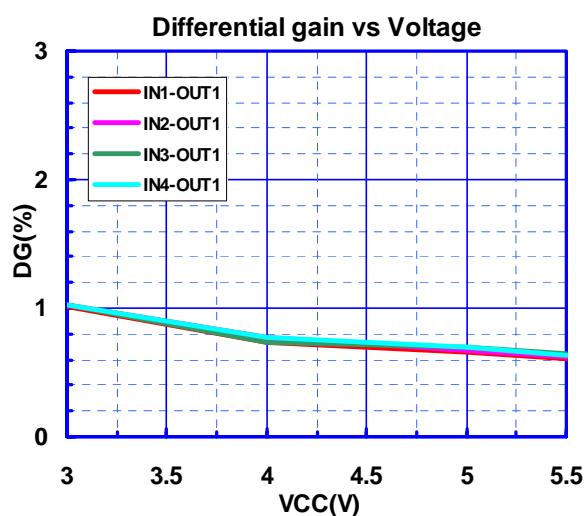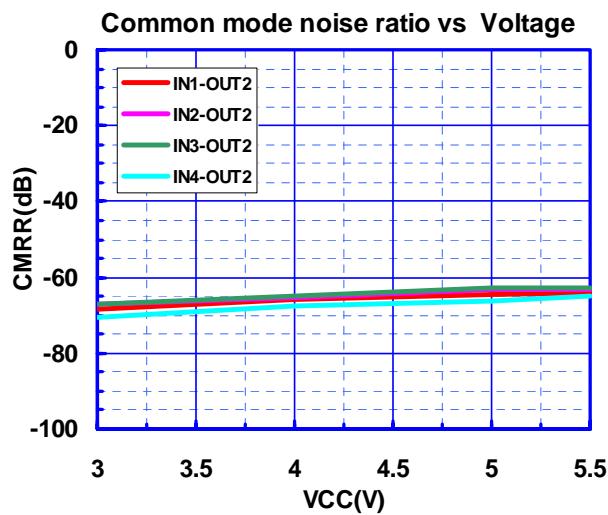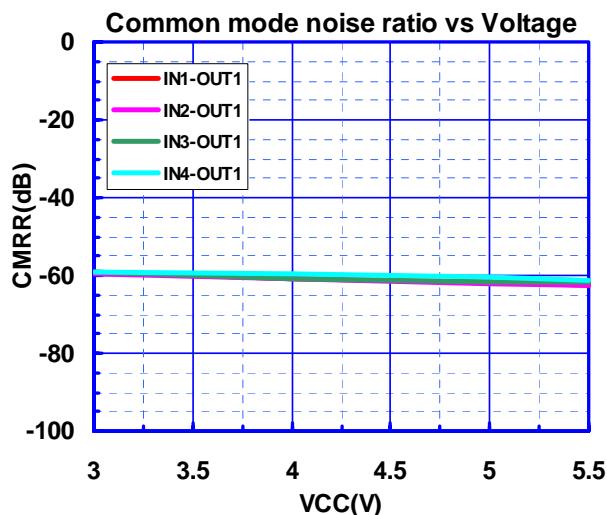

■TYPICAL CHARACTERISTICS

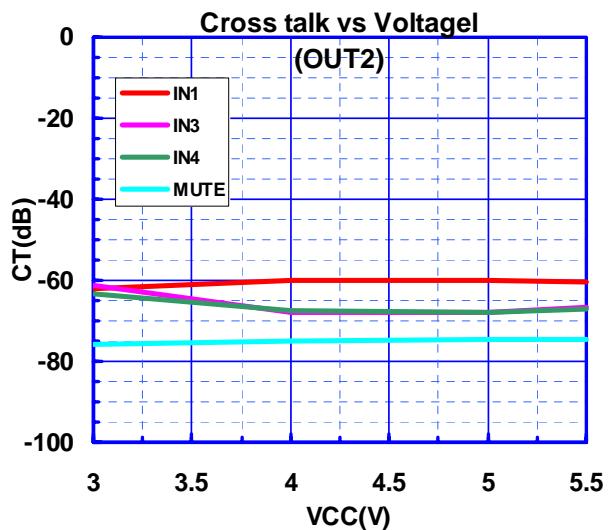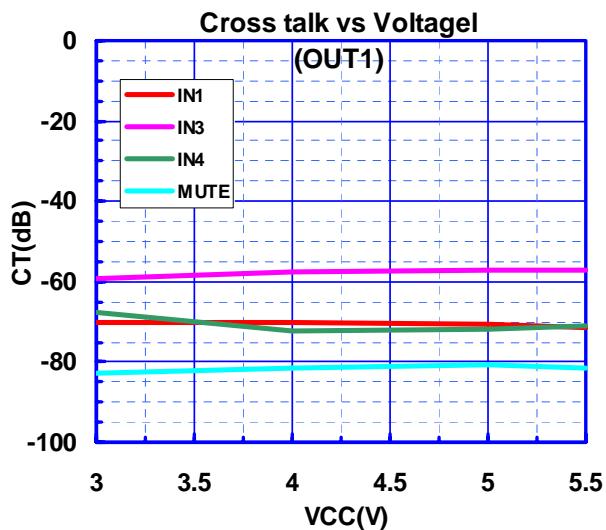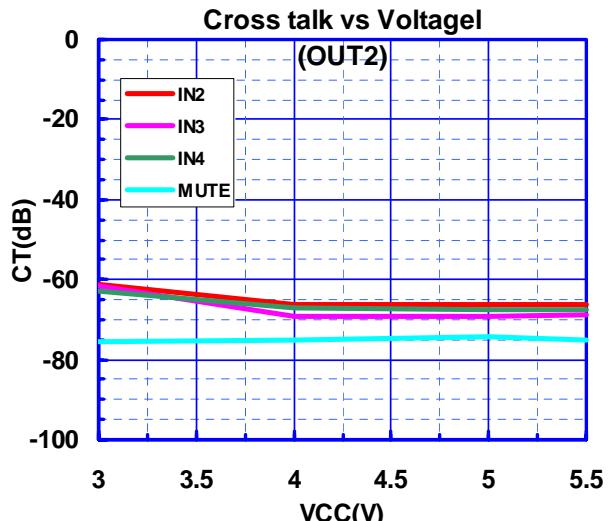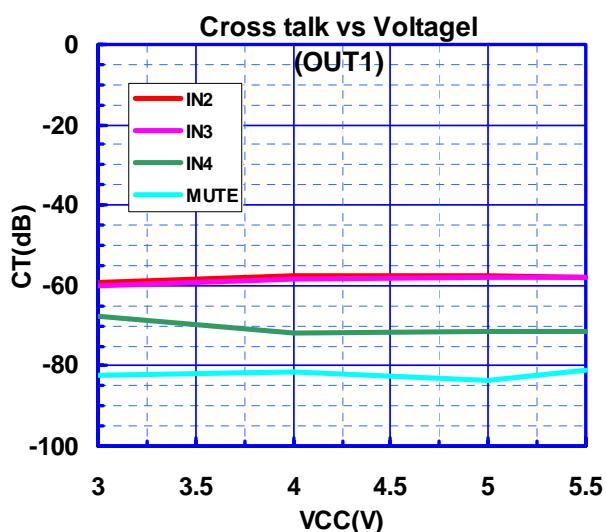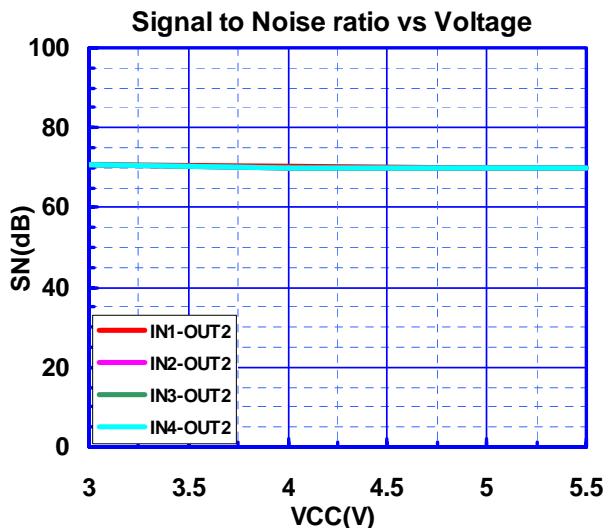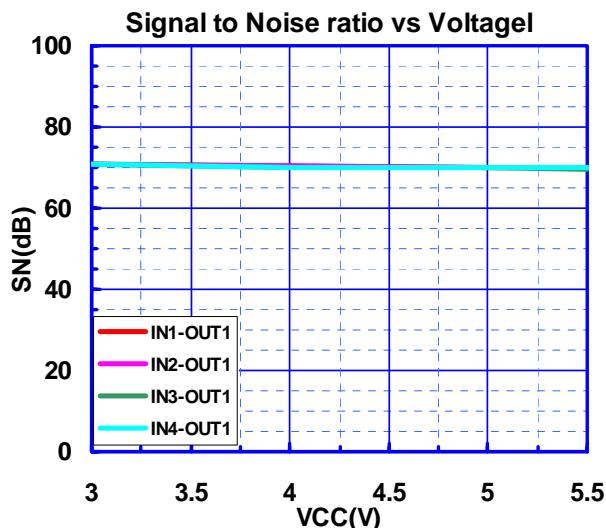

■TYPICAL CHARACTERISTICS

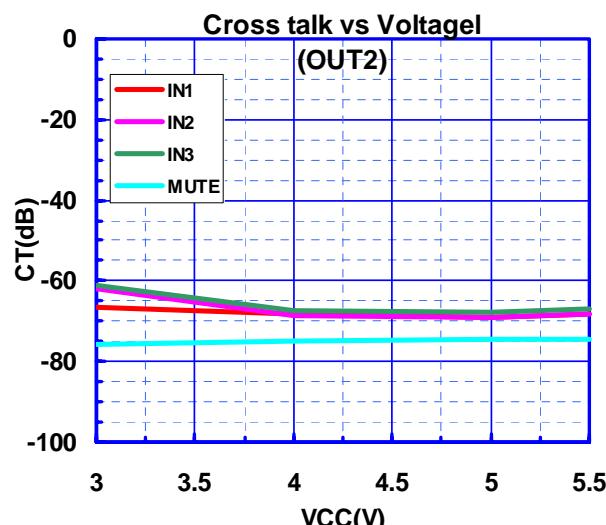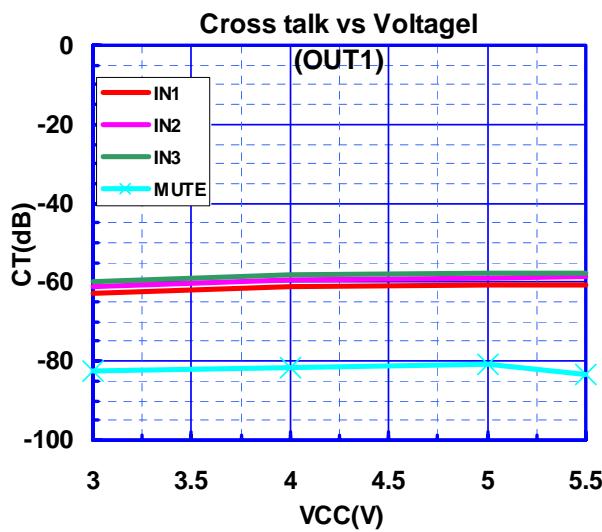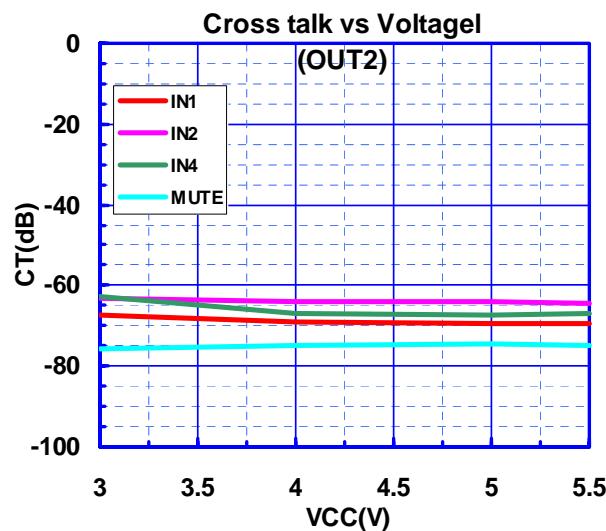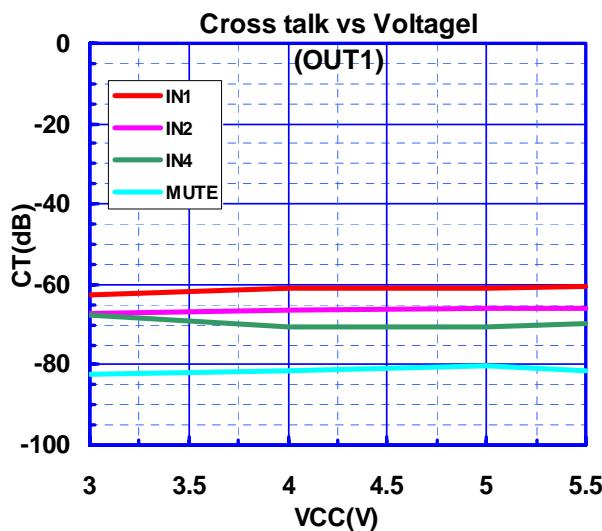

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJW1342V-TE2](#)