


**Circuit Configuration**



**Dimensions mm (inches)**

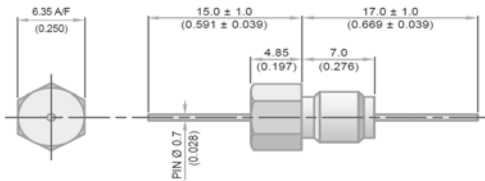

12-32 UNEF Class 2A Thread

Electrical Details	
Electrical Configuration	C Filter
Capacitance Measurement	@ 1000hr Point
Current Rating	10A
Insulation Resistance (IR)	10GΩ or 1000ΩF
Temperature Rating	-55°C to +125°C
Ferrite Inductance (Typical)	Not Applicable
Mechanical Details	
Head A/F	6.35mm (0.250")
Nut A/F	7.92mm (0.312")
Washer Diameter	11.35mm (0.447")
Mounting Torque	0.6Nm (5.31lbf in) max. if using nut 0.3Nm (2.65lbf in) max. into tapped hole
Mounting Hole Diameter	5.7mm ± 0.1 (0.224" ± 0.004")
Max. Panel Thickness	3.9mm (0.154")
Weight (Typical)	1.8g (0.06oz)
Finish	Silver plate on copper undercoat

Product Code	Hardware (Nuts & Washers etc.)	Capacitance ±20% UOS	Dielectric	Rated Voltage (dc)	DWV (dc)	Typical Insertion Loss (db)						
						0.01MHz	0.1MHz	1MHz	10MHz	100MHz	1GHz	
*SFCDC5000100ZC	0 = No hardware supplied 1 = supplied with standard nut and wavy washer Other options available – please contact factory	10pF -20% / +80%	COG	500	750						4	
SFCDC5000150ZC		15pF -20% / +80%	COG	500	750						7	
SFCDC5000220ZC		22pF -20% / +80%	COG	500	750						10	
SFCDC5000330ZC		33pF -20% / +80%	COG	500	750						12	
*SFCDC5000470ZC		47pF -20% / +80%	COG	500	750					1	15	
*SFCDC5000680MC		68pF	COG	500	750					2	18	
*SFCDC5000101MC		100pF	COG	500	750					4	22	
SFCDC5000151MC		150pF	COG	500	750					7	25	
*SFCDC5000221MC		220pF	COG	500	750					10	29	
*SFCDC5000331MC		330pF	COG	500	750					13	33	
*SFCDC5000471MX		470pF	†X7R	500	750				1	16	35	
SFCDC5000681MX		680pF	†X7R	500	750				2	19	36	
*SFCDC5000102MX		1.0nF	X7R	500	750				4	23	41	
SFCDC5000152MX		1.5nF	X7R	500	750				7	26	45	
*SFCDC5000222MX		2.2nF	X7R	500	750				10	30	50	
SFCDC5000332MX		3.3nF	X7R	500	750				13	33	52	
*SFCDC5000472MX		4.7nF	X7R	500	750				1	16	36	55
SFCDC5000682MX		6.8nF	X7R	500	750				2	19	39	57
*SFCDC5000103MX		10nF	X7R	500	750				4	22	41	60
*SFCDC5000153MX		15nF	X7R	500	750				7	25	44	62
*SFCDC5000223MX		22nF	X7R	500	750				10	29	46	65
SFCDC5000333MX		33nF	X7R	500	750				13	33	48	68
*SFCDC5000473MX		47nF	X7R	500	750			1	16	35	50	70
SFCDC5000683MX		68nF	X7R	500	750			2	19	39	54	>70
SFCDC5000104MX		100nF	X7R	500	750			4	22	41	57	>70
SFCDC5000154MX		150nF	X7R	500	750			7	25	45	60	>70
*SFCDC2000224MX		220nF	X7R	200	500			10	29	49	62	>70
SFCDC1000334MX		330nF	X7R	100	250			13	33	52	66	>70
*SFCDC1000474MX		470nF	X7R	100	250		1	16	35	55	68	>70
SFCDC5000684MX		680nF	X7R	50	125		2	19	38	58	70	>70

\* Preferred values

† Also available in COG

**Ordering Information**

Type	Case Style	Thread	Electrical configuration	Voltage (dc)	Capacitance in picofarads (pF)	Capacitance Tolerance	Dielectric	Hardware
SF	C	D	C	500	0102	M	X	O
Syfer Filter	6.35mm Hex Head	12-32 UNEF	C = C Filter	050 = 50V 100 = 100V 200 = 200V 500 = 500V	First digit is 0. Second and third digits are significant figures of capacitance code. The fourth digit is the number of zeros following. Examples: 0101 = 100pF 0332 = 3300pF	M = ±20% Z = -20+80%	C = COG/NPO X = X7R	O = Without 1 = With

Note: The addition of a 4-digit numerical suffix code can be used to denote changes to the standard part.

Options include for example: change of pin length / custom body dimensions or threads / alternative voltage rating / non-standard intermediate capacitance values / test requirements.

Please refer specific requests to the factory.

