

FAST RECOVERY GLASS PASSIVATED RECTIFIER

VOLTAGE RANGE 50 to 1000 Volts CURRENT 1.0 Ampere

FEATURES


- * High reliability
- * Low leakage
- * Low forward voltage drop
- * High current capability
- * Glass passivated junction
- * High switching capability

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: Device has UL flammability classification 94V-0
- * Lead: MIL-STD-202E method 208C guaranteed
- * Mounting position: Any
- * Weight: 0.33 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

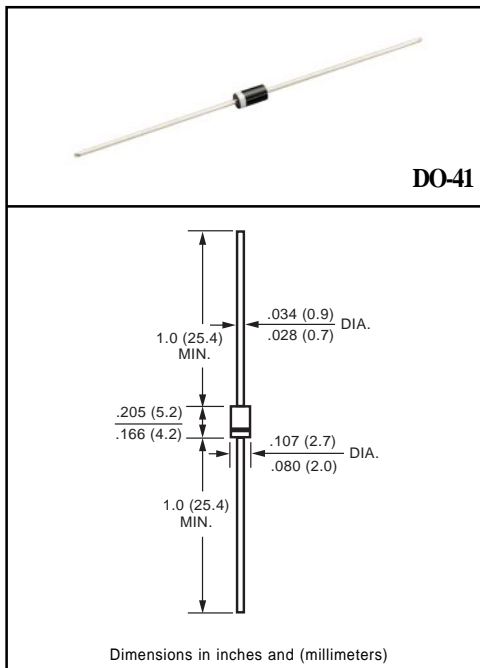

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

| RATINGS | SYMBOL | FR101G | FR102G | FR103G | FR104G | FR105G | FR105PG | FR106G | FR107G | UNITS | |
|---|----------|--------------|--------|--------|--------|--------|---------|--------|--------|-------|------|
| Maximum Recurrent Peak Reverse Voltage | VRRM | 50 | 100 | 200 | 400 | 600 | 600 | 800 | 1000 | Volts | |
| Maximum RMS Voltage | VRMS | 35 | 70 | 140 | 280 | 420 | 420 | 560 | 700 | Volts | |
| Maximum DC Blocking Voltage | Vdc | 50 | 100 | 200 | 400 | 600 | 600 | 800 | 1000 | Volts | |
| Maximum Average Forward Rectified Current at TA = 75°C | Io | 1.0 | | | | | | | | | Amps |
| Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC method) | IFSM | 30 | | | | | | | | | Amps |
| Typical Junction Capacitance (Note 2) | CJ | 15 | | | | | | | | | pF |
| Operating and Storage Temperature Range | TJ, TSTG | -55 to + 150 | | | | | | | | | °C |


ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

| CHARACTERISTICS | SYMBOL | FR101G | FR102G | FR103G | FR104G | FR105G | FR105PG | FR106G | FR107G | UNITS | |
|--|--------|--------|--------|--------|--------|--------|---------|--------|--------|-------|-------|
| Maximum Instantaneous Forward Voltage at 1.0A DC | VF | 1.3 | | | | | | | | | Volts |
| Maximum DC Reverse Current at Rated DC Blocking Voltage TA = 25°C | IR | 5.0 | | | | | | | | | uAmps |
| Maximum Full Load Reverse Current Average, Full Cycle .375" (9.5mm) lead length at TL = 55°C | | 100 | | | | | | | | | uAmps |
| Maximum Reverse Recovery Time (Note 1) | trr | 150 | | | 250 | | 150 | 500 | | nSec | |

NOTES : 1. Test Conditions: IF = 0.5A, IR = -1.0A, IRR = -0.25A
 2. Measured at 1 MHz and applied reverse voltage of 4.0 volts
 3. "Fully ROHS compliant", "100% Sn plating(Pb-free)".

RATING AND CHARACTERISTIC CURVES (FR101G THRU FR107G)

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

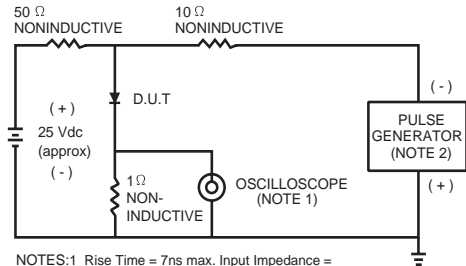

NOTES: 1. Rise Time = 7ns max. Input Impedance = 1 megohm. 22pF.
2. Rise Time = 10ns max. Source Impedance = 50 ohms.




FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

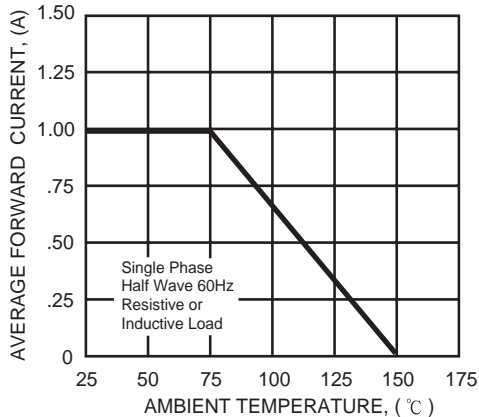


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

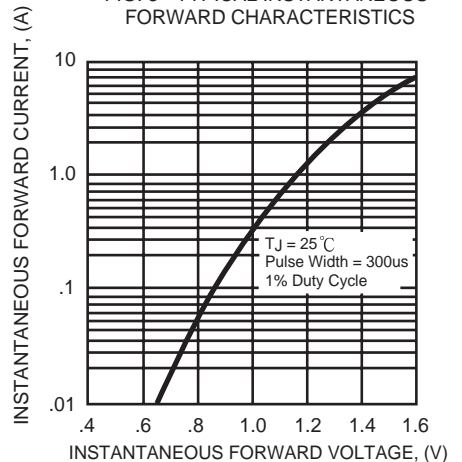


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

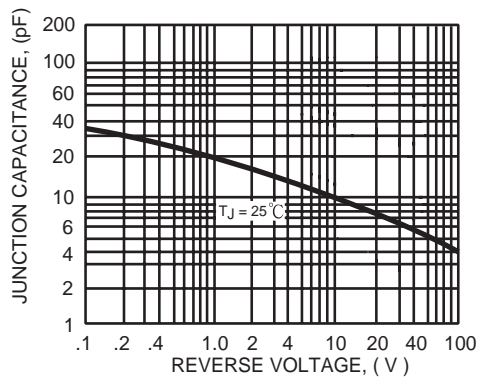


FIG. 3 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

