


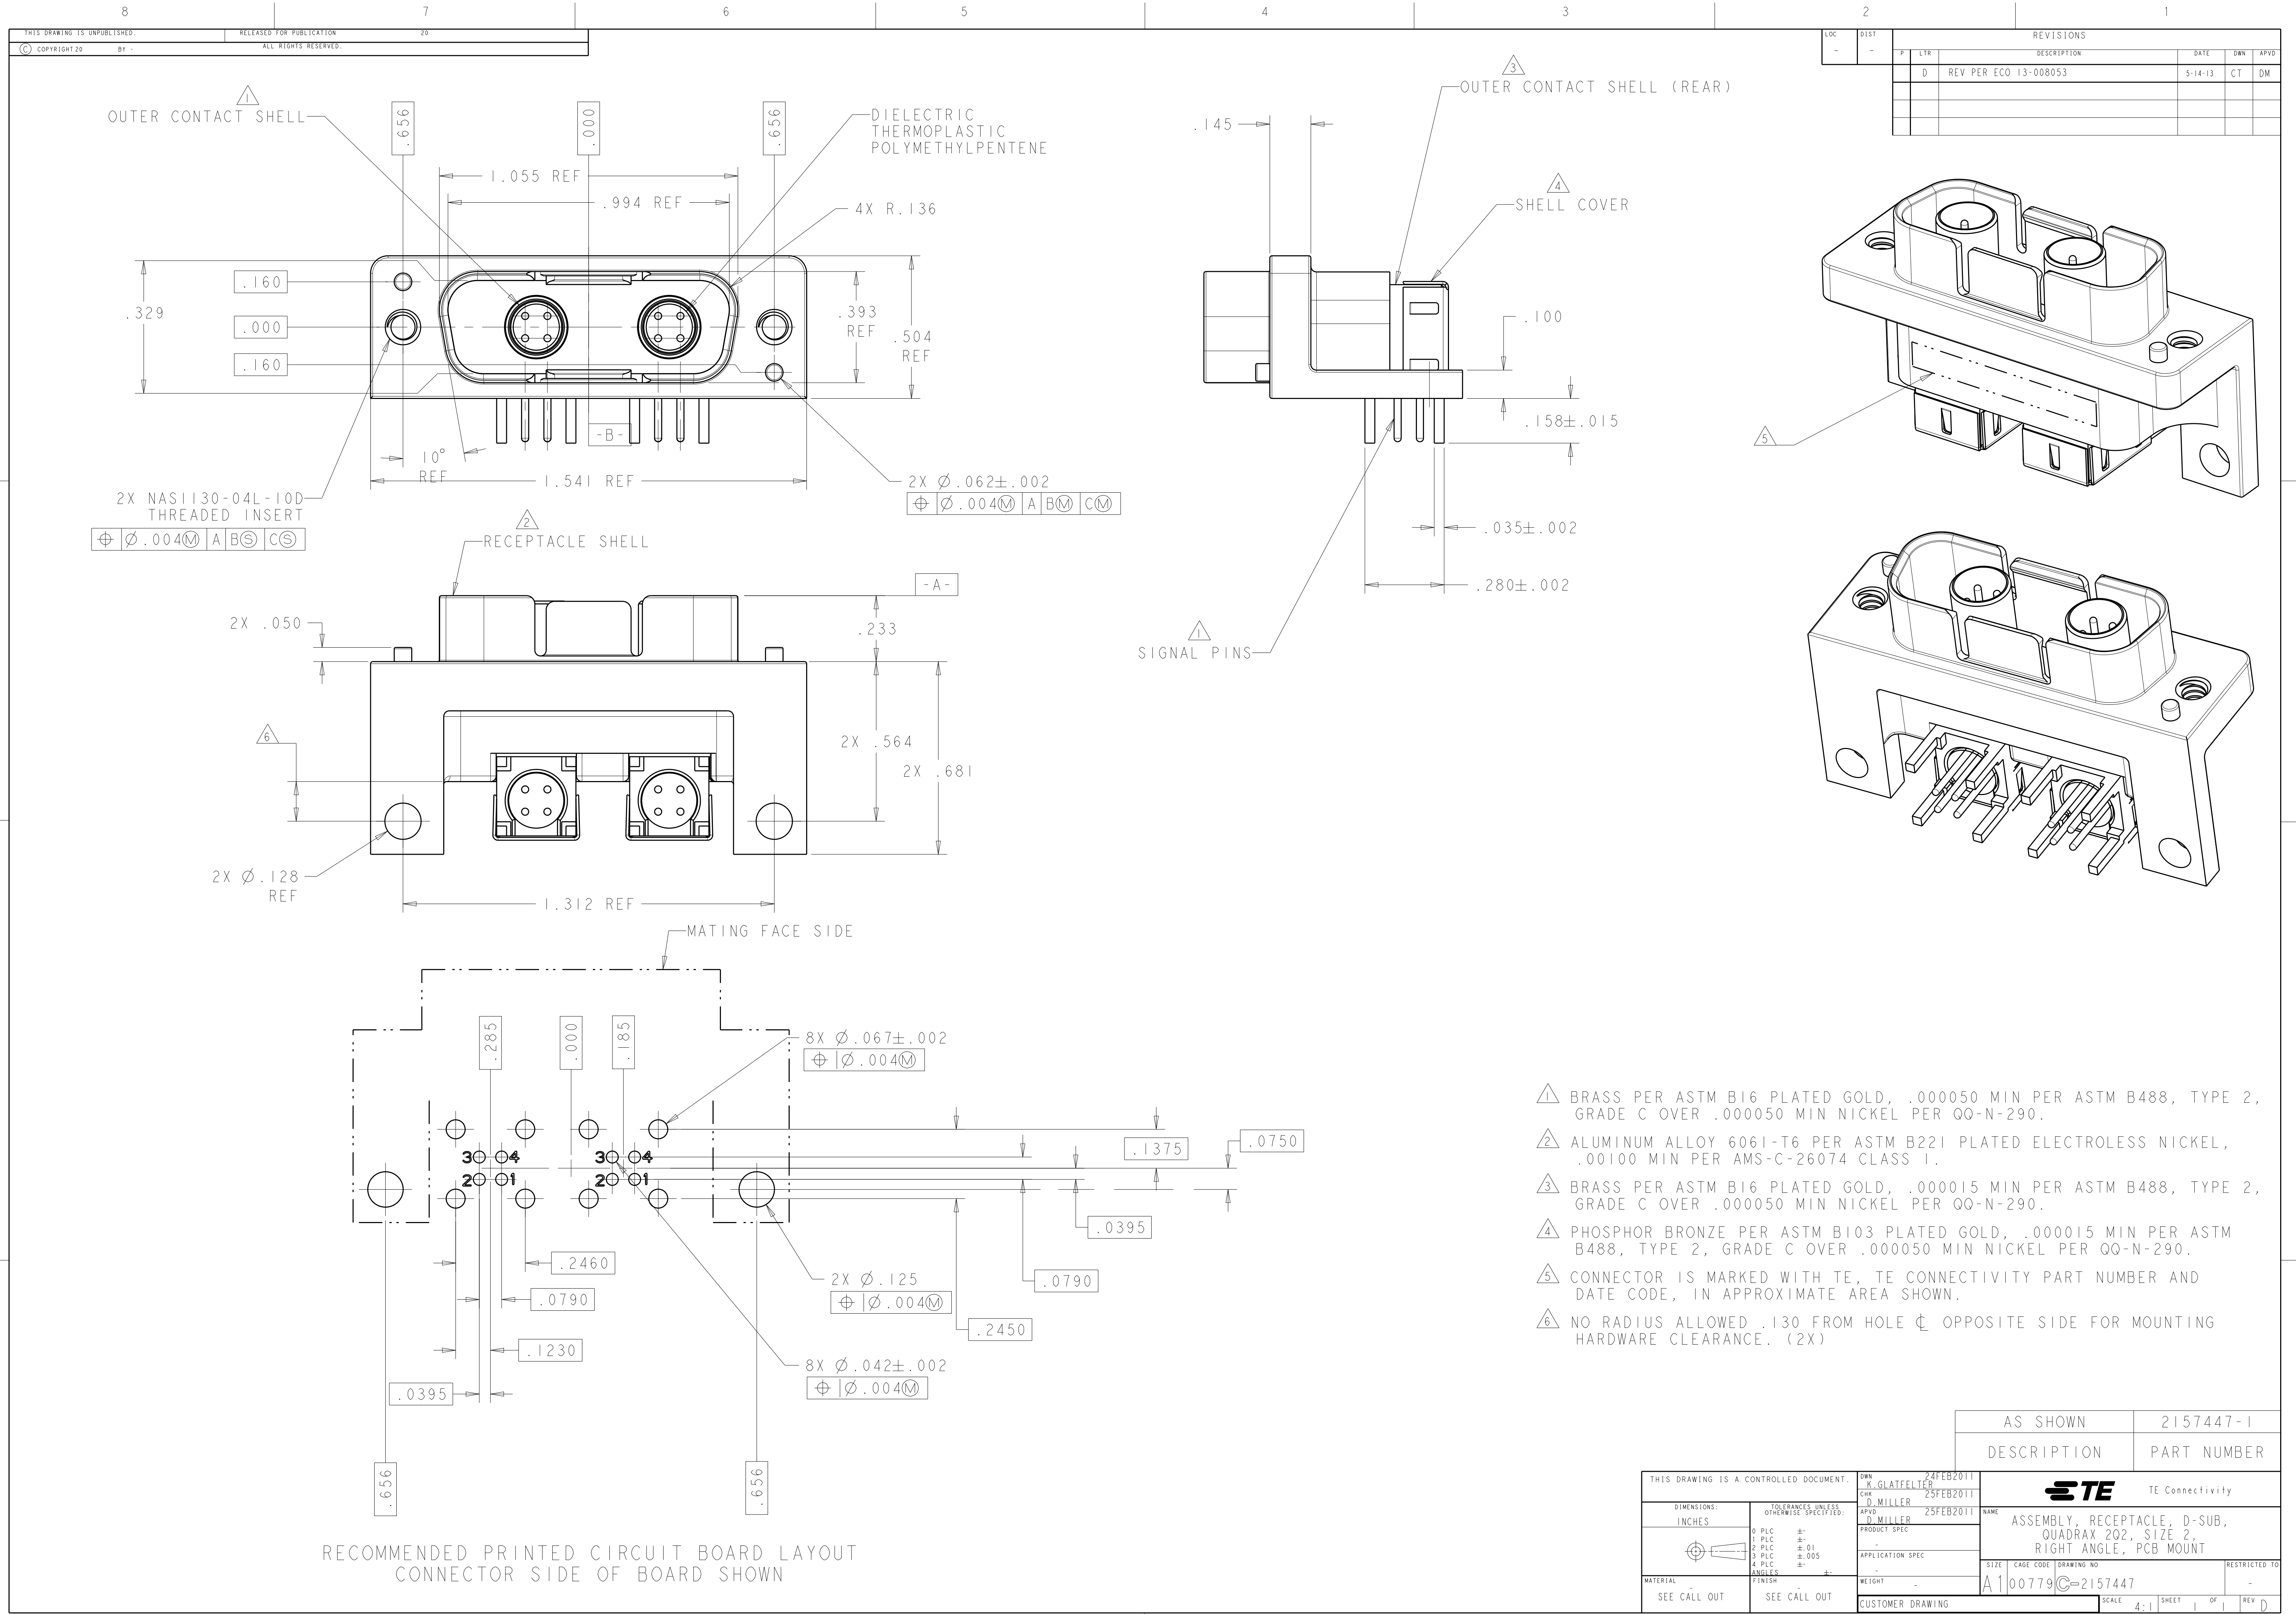

LOC		DIST		REVISIONS					
-		-		P	LTR	DESCRIPTION	DATE	DWN	APVD
					D	REV PER ECO 13-008053	5-14-13	CT	DM

- 1 BRASS PER ASTM B16 PLATED GOLD, .000050 MIN PER ASTM B488, TYPE 2, GRADE C OVER .000050 MIN NICKEL PER QQ-N-290.
- 2 ALUMINUM ALLOY 6061-T6 PER ASTM B221 PLATED ELECTROLESS NICKEL, .00100 MIN PER AMS-C-26074 CLASS 1.
- 3 BRASS PER ASTM B16 PLATED GOLD, .000015 MIN PER ASTM B488, TYPE 2, GRADE C OVER .000050 MIN NICKEL PER QQ-N-290.
- 4 PHOSPHOR BRONZE PER ASTM B103 PLATED GOLD, .000015 MIN PER ASTM B488, TYPE 2, GRADE C OVER .000050 MIN NICKEL PER QQ-N-290.
- 5 CONNECTOR IS MARKED WITH TE, TE CONNECTIVITY PART NUMBER AND DATE CODE, IN APPROXIMATE AREA SHOWN.
- 6 NO RADIUS ALLOWED .130 FROM HOLE $\perp$ OPPOSITE SIDE FOR MOUNTING HARDWARE CLEARANCE. (2X)

RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT
CONNECTOR SIDE OF BOARD SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. GLATFELT CHK D. MILLER APVD D. MILLER	24FEB2011 25FEB2011 25FEB2011
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	NAME
	0 PLC ± 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ± ANGLES ± FINISH ±	APPLICATION SPEC	SIZE
MATERIAL SEE CALL OUT	SEE CALL OUT	WEIGHT	CAGE CODE
CUSTOMER DRAWING		SCALE	4:1
		SHEET	1
		OF	1
		REV	D