


SCHMATIC
VIEWED FROM BASE END

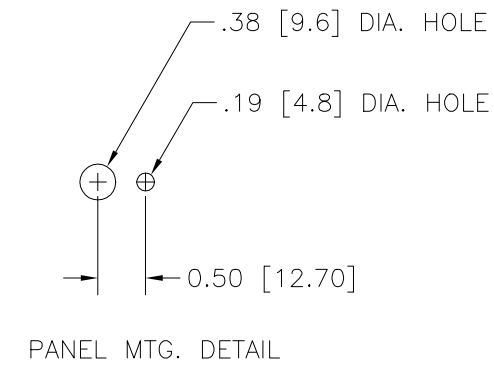

PANEL MTG. DETAIL

SPECIFICATIONS												
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS				
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD		CONSTANT IMPEDANCE LOAD		FOR INCREASING VOLTAGE AS VIEWED FROM BASE END				
				MAX. AMPS	MAX. KVA	MAX. AMPS		MAX. KVA	INPUT	JUMPER	OUTPUT	
SINGLE PHASE	120	50/60	0-120	3.0	0.36	3.5	0.42	CW	1-2	---	1-3	
		60	0-132	3.0	0.40	---	---	CCW	1-2	---	2-3	
								CW	1-4	---	1-3	

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS HOLES ANGLES DRAFT UNITS IN [mm] .0001-.0002 .06 .002 1° 1-1/2° ALL DIMENSIONS APPLY AFTER PLATING

TITLE: SPECIFICATION CONTROL DWG. VARIABLE TRANSFORMER TYPE: 291



DRWN BY K. TOLLIVER	DATE 8/23/91	FIRST USED ON 031-0291	DO NOT SCALE DWG.	CUSTOMER APPROVAL	DATE
CHECKER	DATE	WEIGHT APPROX.	CODE IDENT. NO. 83008	DWG. NO.	DWG. NO.
ENGINEER	DATE	SCALE FULL	SHEET 1 of 1	D	031-0291