

2ch LOW DROPOUT VOLTAGE REGULATOR

■ GENERAL DESCRIPTION

The NJU7254 is a 2ch low dropout voltage regulator with ON/OFF control. Advanced C-MOS technology achieves high ripple rejection and low quiescent current.

SOT-23-6 package, 100mA×2ch output current and 1.0μF small capacitor make NJU7254 suitable for space conscious applications.

■ PACKAGE OUTLINE




NJU7254F1

■ FEATURES

- High Ripple Rejection 65dB typ. (f=1kHz, Vo=3V Version)
- Low Quiescent Current 18μA/ch(typ.), 30μA /total (typ.)
- Output capacitor with 1.0μF ceramic capacitor
- Output Current Io(max.)=100mA ×2ch
- High Precision Output Vo±1.0%
- Low Dropout Voltage 0.09V typ. (Io=60mA, Vo=3V Version)
- ON/OFF Control (Each ch.)
- Internal Short Circuit Current Limit
- C-MOS technology
- Package Outline SOT-23-6

■ PIN CONFIGURATION




NJU7254F1

PIN FUNCTION

1. V_{OUT2}
2. GND
3. V_{OUT1}
4. CONTROL1
5. V_{IN}
6. CONTROL2

■ EQUIVALENT CIRCUIT

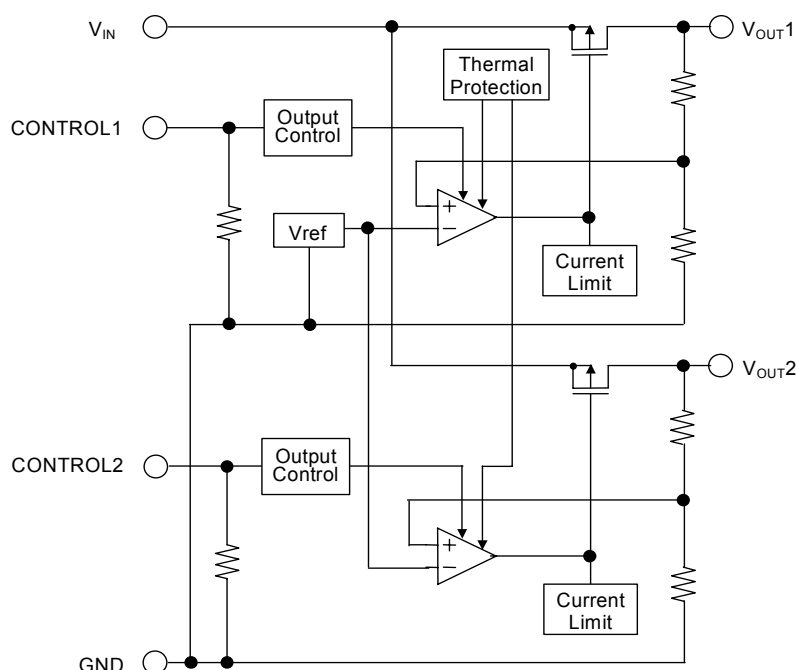

NJU7254

■ OUTPUT VOLTAGE RANK LIST

Device Name	V _{OUT}	
	CH1	CH2
NJU7254F1-2121	2.1V	2.1V
NJU7254F1-0303	3.0V	3.0V
NJU7254F1-0521	5.0V	2.1V

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	+9	V
Control Voltage	V _{CONT}	+9(*1)	V
Power Dissipation	P _D	SOT-23-6 200(*2) 400(*3)	mW
Operating Temperature	Topr	-40~+85	°C
Storage Temperature	Tstg	-40~+125	°C

(*1): When input voltage is less than +14V, the absolute maximum control voltage is equal to the input voltage.

(*2): Device itself.

(*3): Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

■ Operating voltage

V_{IN}=+2.3 ~ +8V (In case of Vo<2.1V version)

■ ELECTRICAL CHARACTERISTICS (V_{IN}=V_O+1V(*4), C_{IN}=0.1μF, C_O=1.0μF (Vo≤2.0V : Co=2.2μF), Ta=25°C)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V _O	I _O =30mA	-1.0%	—	+1.0%	V
Input Voltage	V _{IN}		—	—	8	V
Quiescent Current 1	I _{Q1}	V _{CONT1} =V _{IN} , V _{CONT2} =0V or V _{CONT1} =0V, V _{CONT2} =V _{IN} , I _O =0mA, Include I _{CONT}	—	18	35	μA
Quiescent Current 2	I _{Q2}	V _{CONT1} =V _{CONT2} =V _{IN} , I _O =0mA, Include I _{CONT}	—	30	60	μA
Quiescent Current at Control OFF	I _{Q(OFF)}	V _{CONT1} =V _{CONT2} =0V	—	0.1	1	μA
Output Current	I _O	V _O -0.1V (V _O ≤2.0V Version) V _O -0.3V (V _O ≥2.1V Version)	100	—	—	mA
Short Circuit Limit	I _{LIM}	V _O =0V	—	40	—	mA
Line Regulation	ΔV _O /ΔV _{IN}	V _{IN} =V _O +1V~V _O +6V (V _O <2.0V Version) V _{IN} =V _O +1V~8.0V (V _O ≥2.0V Version), I _O =30mA	—	—	0.20	%/V
Load Regulation	ΔV _O /ΔI _O	I _O =0~100mA	—	—	0.03	%/mA
Dropout Voltage	ΔV _{I-O}	I _O =60mA	2.1V≤V _O ≤2.4V	—	0.11	0.16 V
			2.5V≤V _O ≤2.7V	—	0.10	0.15 V
			2.8V≤V _O ≤3.3V	—	0.09	0.14 V
			3.4V≤V _O ≤5.0V	—	0.07	0.12 V
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔTa	Ta=0~85°C, I _O =10mA	—	±100	—	ppm/°C
Output Noise Voltage	V _{NO1}	f=10Hz ~ 80kHz, I _O =0mA, V _O =3.0V Version	—	75	—	μVrms
Pull-down Resistance	R _{CONT}		2	5	10	MΩ
Control Voltage for ON-state	V _{CONT(ON)}		1.6	—	—	V
Control Voltage for OFF-state	V _{CONT(OFF)}		—	—	0.3	V


(*4): V_{IN}=V_O+1V means add 1V to higher output voltage.

(*5): The output voltage excludes under 2.1V.


The above specification is a common specification for all voltages.

Therefore, it may be different from the individual specification for a specific output Voltage.

■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

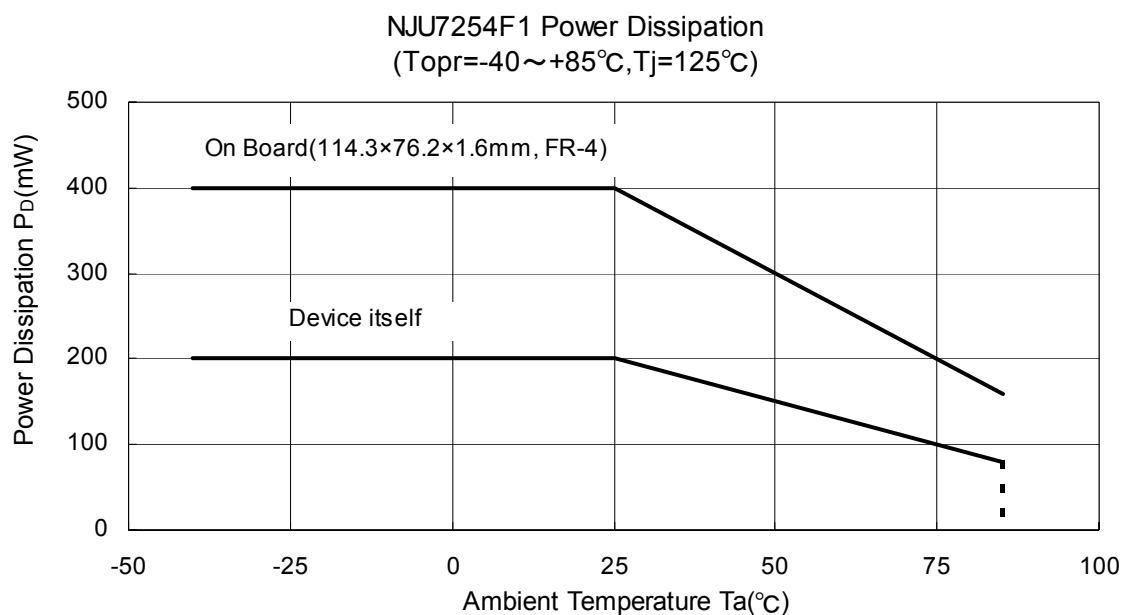


■ TEST CIRCUIT

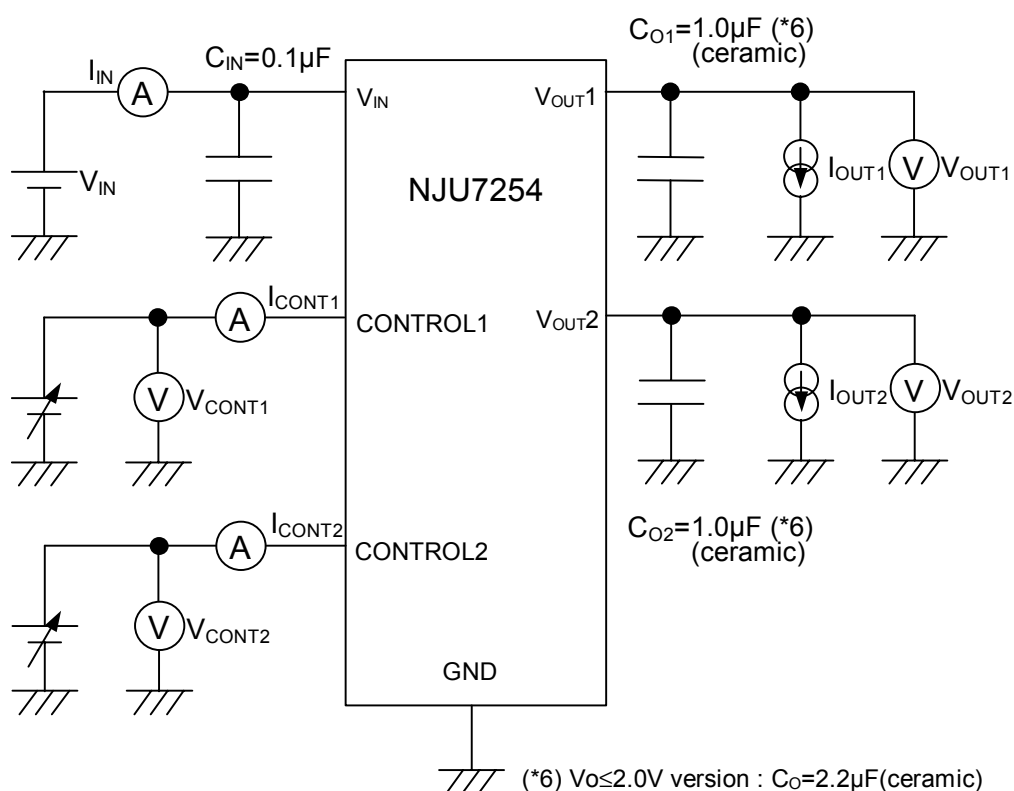


■ TYPICAL APPLICATION

① In case that ON/OFF Control is not required:

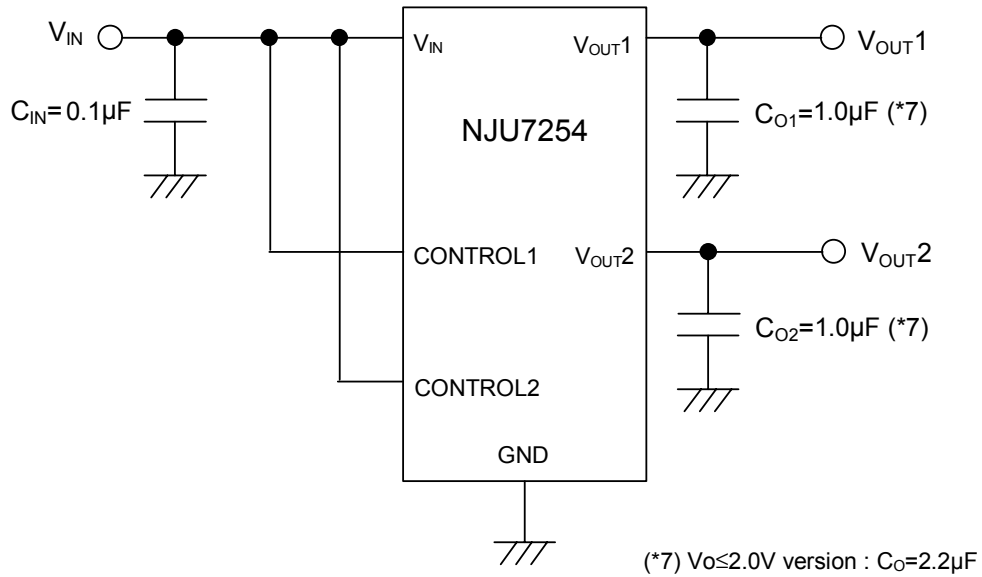

Connect control terminal to V_{IN} terminal.







② In use of ON/OFF Control

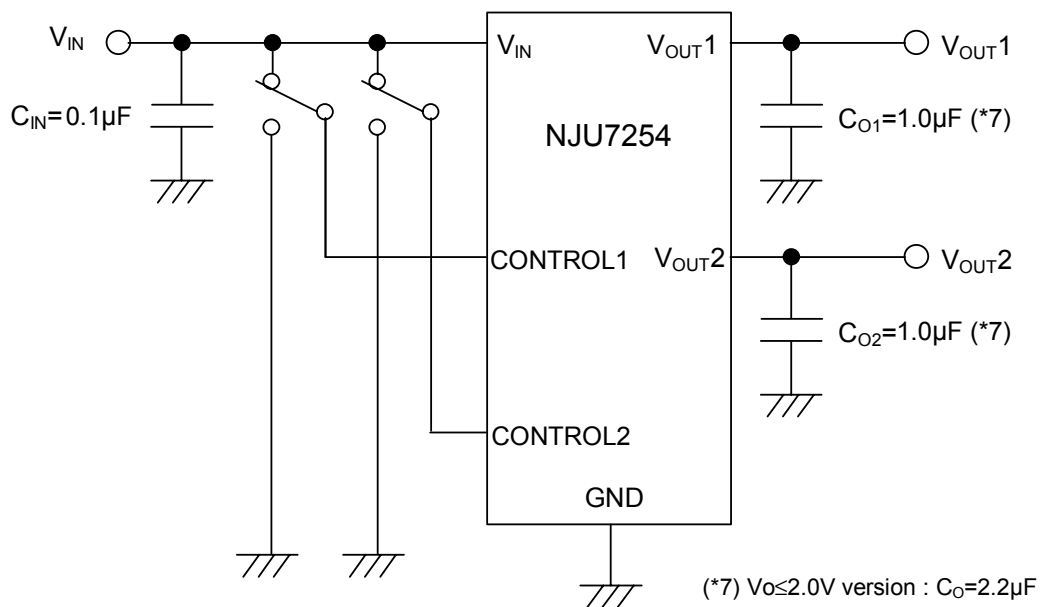






State of control terminal:

- "H" → output is enabled.
- "L" or "open" → output is disabled.







■ TYPICAL CHARACTERISTICS

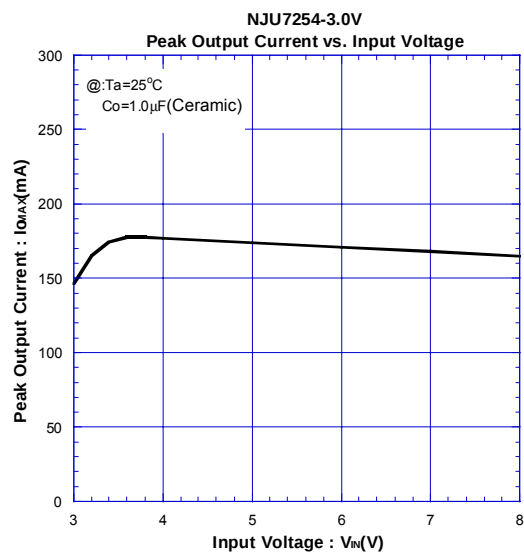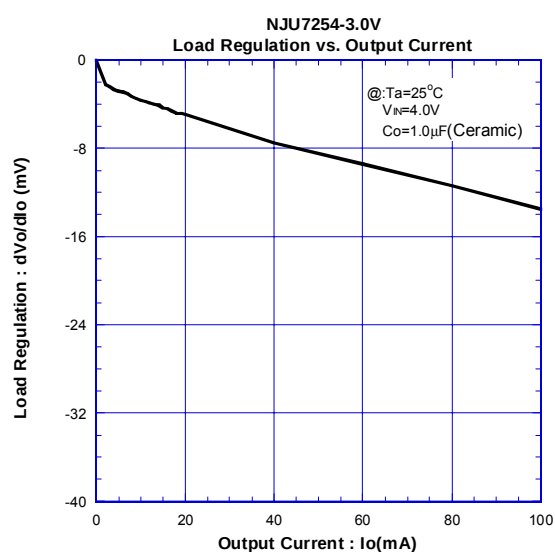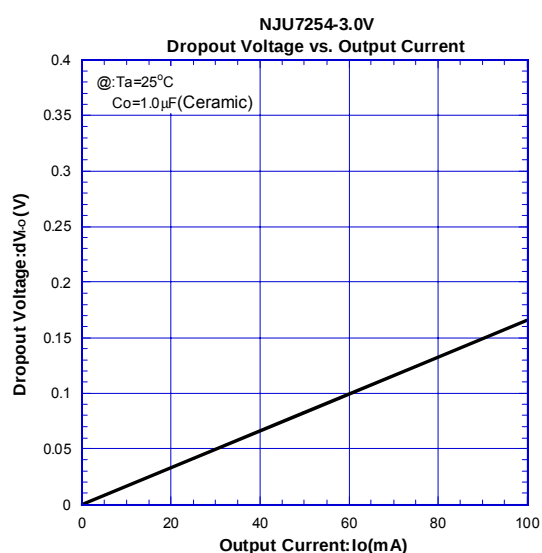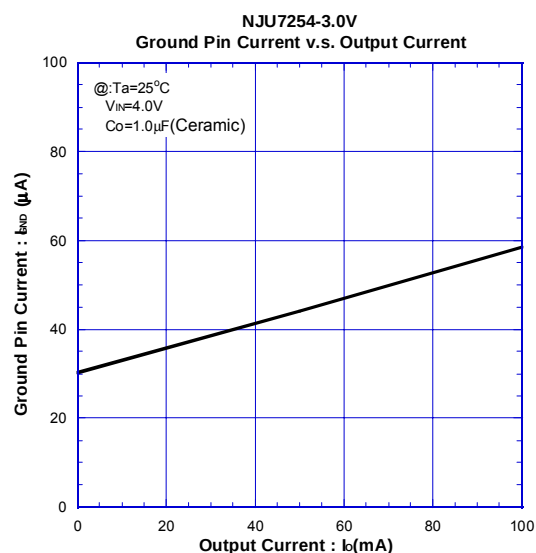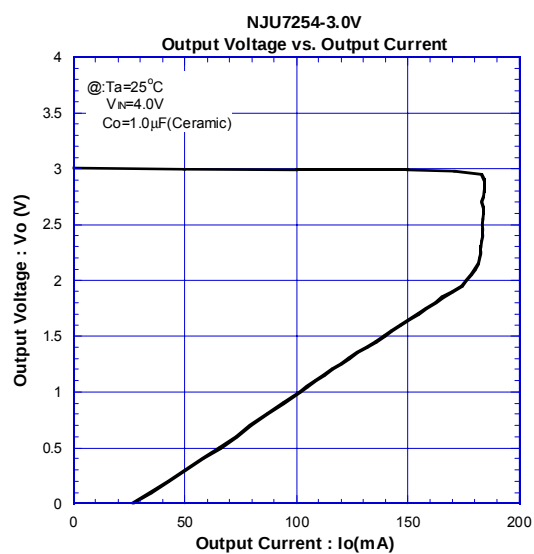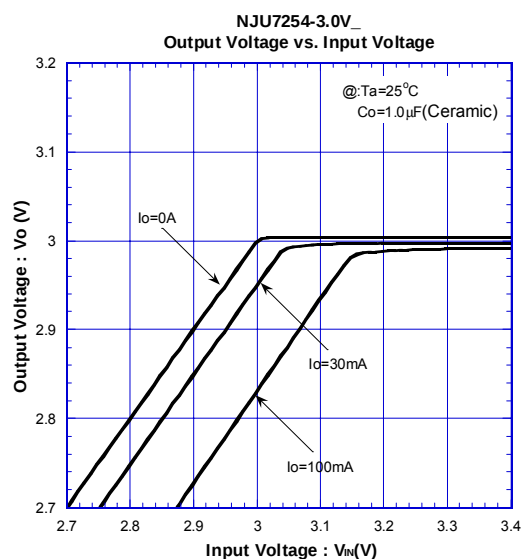




■ TYPICAL CHARACTERISTICS

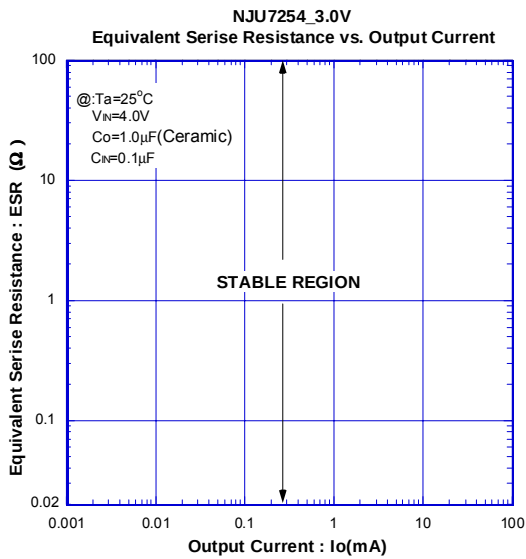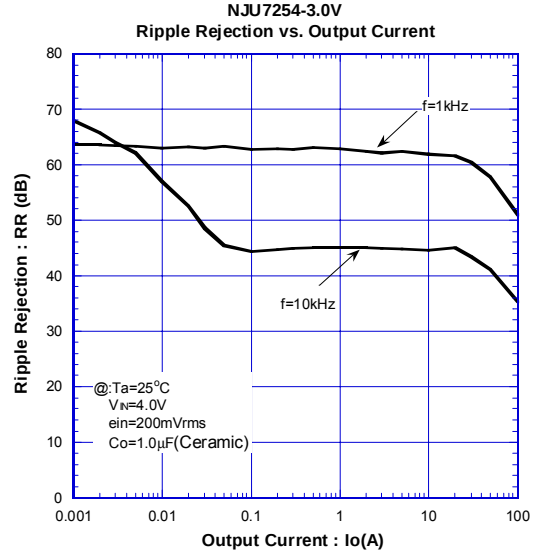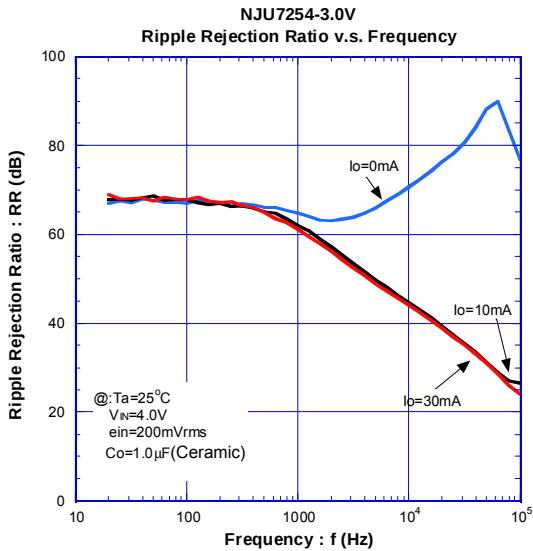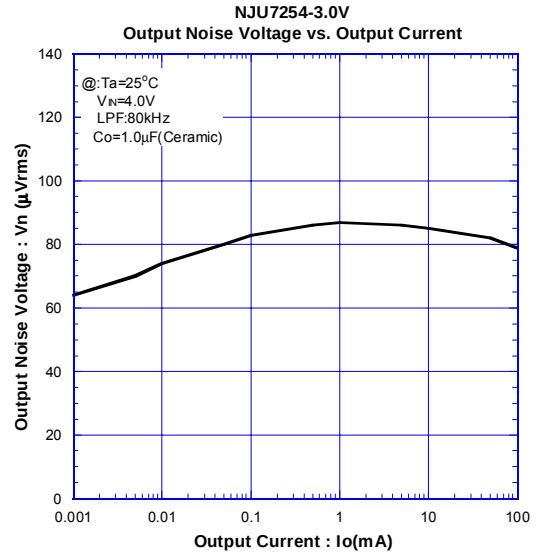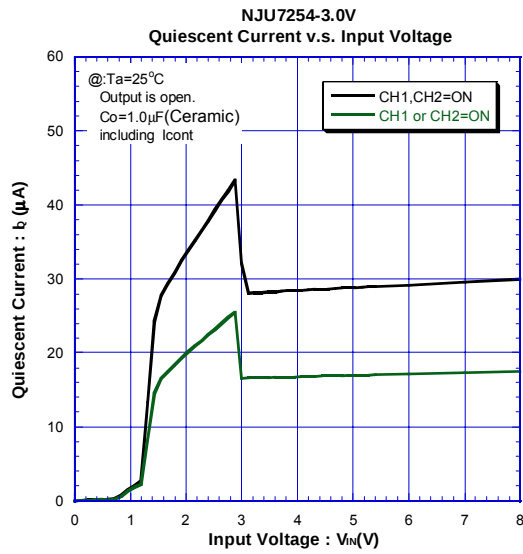




■ TYPICAL CHARACTERISTICS

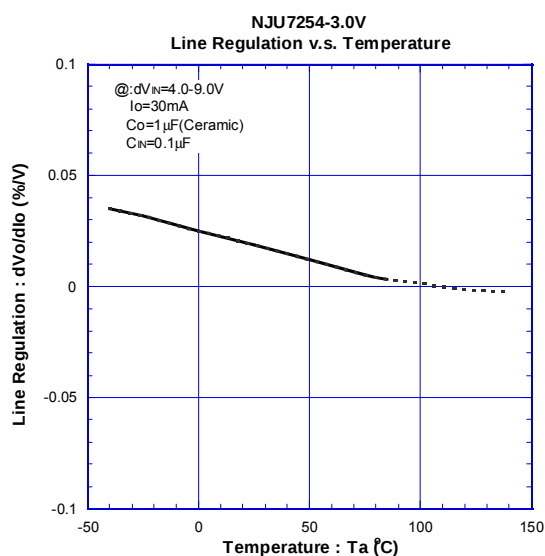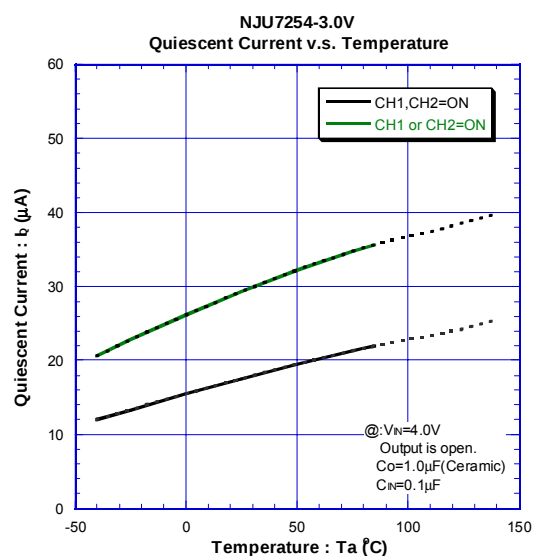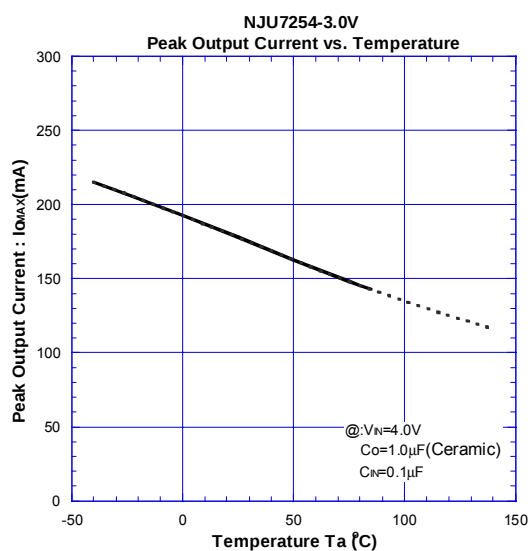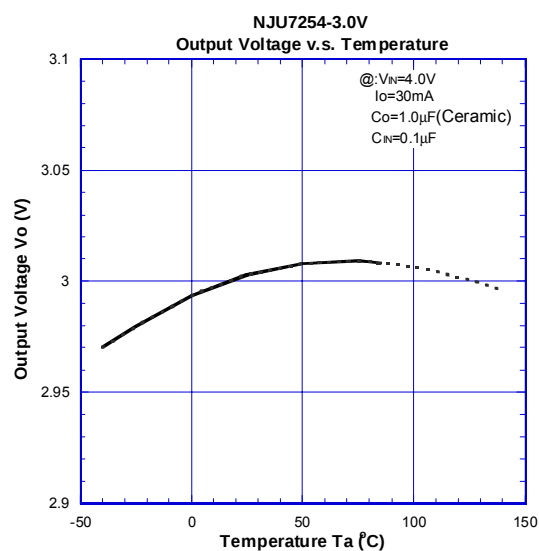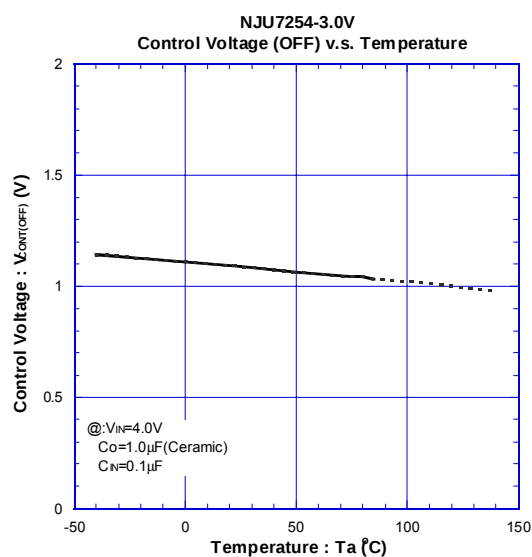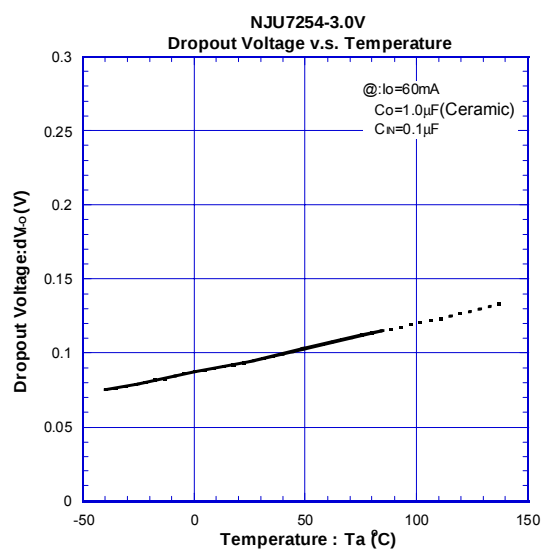

■ TYPICAL CHARACTERISTICS

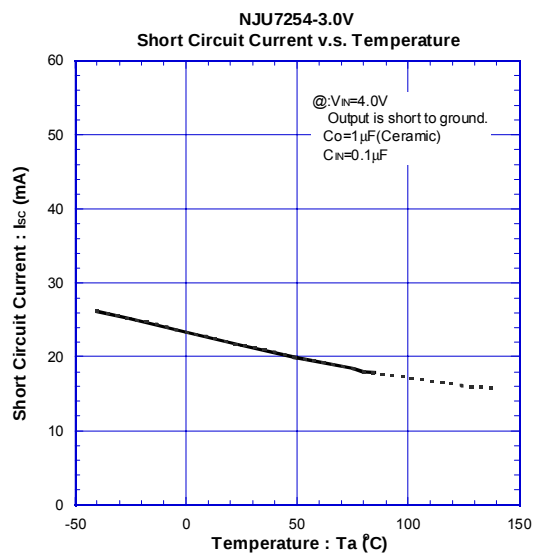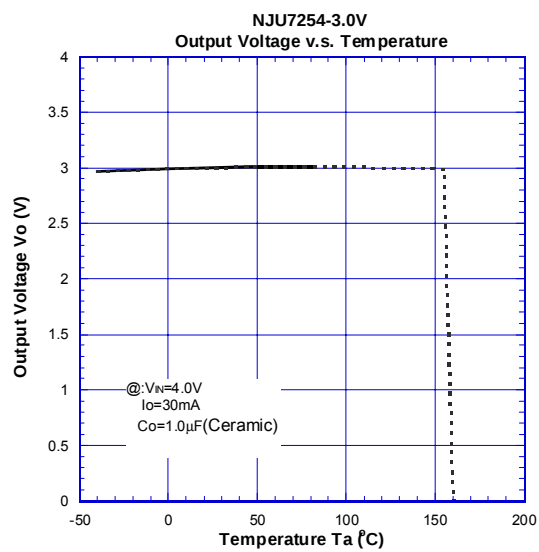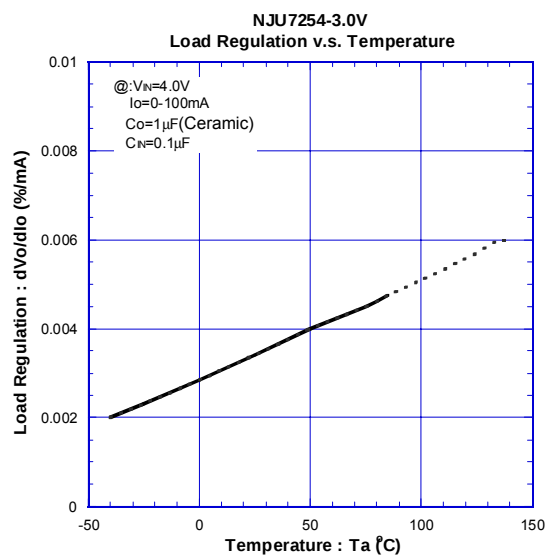

TYPICAL CHARACTERISTICS

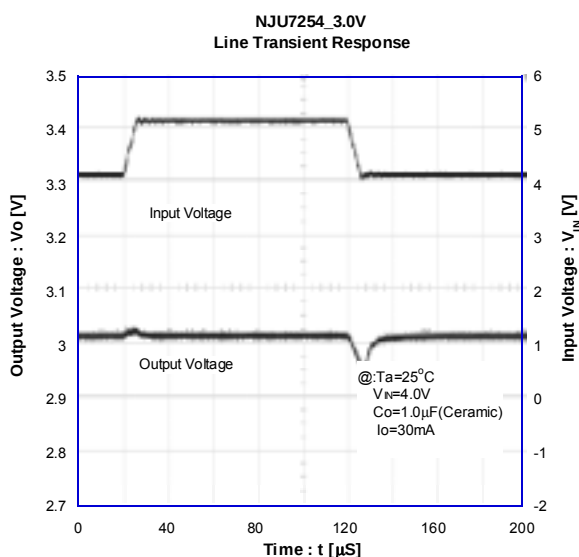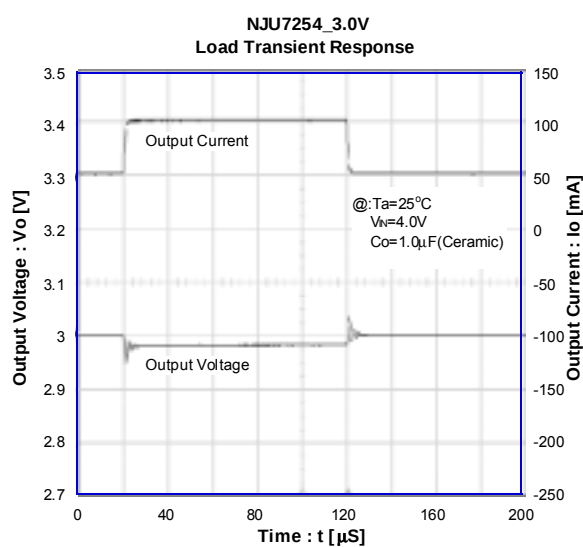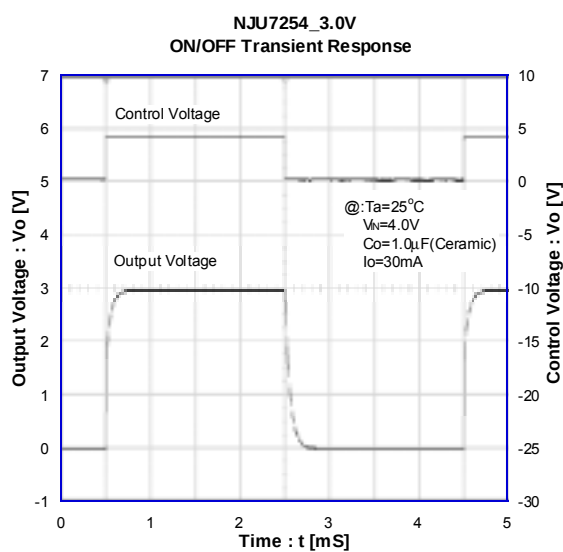

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJU#7254](#) [NJU7254F1-TE1](#)