



SCHOTTKY DIODES MODULE TYPE 600A

Features

High Surge Capability
Types Up to 45V V_{RRM}

Maximum Ratings

Operating Temperature: -40°C to $+175^{\circ}\text{C}$
Storage Temperature: -40°C to $+175^{\circ}\text{C}$

Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
MBR60020CT(R)	20V	14V	20V
MBR60030CT(R)	30V	21V	30V
MBR60035CT(R)	35V	25V	35V
MBR60040CT(R)	40V	28V	40V
MBR60045CT(R)	45V	32V	45V

Electrical Characteristics @ 25°C Unless Otherwise Specified


Average Forward Current (Per pkg)	$I_{F(AV)}$	600A	$T_C = 100^{\circ}\text{C}$
Peak Forward Surge Current (Per leg)	I_{FSM}	4000A	8.3ms, half sine
Maximum Instantaneous Forward Voltage (Per leg) NOTE (1)	V_F	0.65V	$I_{FM} = 300\text{A}; T_J = 25^{\circ}\text{C}$
Maximum Instantaneous Reverse Current At Rated DC Blocking Voltage (Per leg) NOTE (1)	I_R	10 mA 200 mA	$T_J = 25^{\circ}\text{C}$ $T_J = 125^{\circ}\text{C}$
Maximum Thermal Resistance Junction To Case (Per leg)	$R_{\theta jc}$	0.8 $^{\circ}\text{C/W}$	

NOTE :

(1) Pulse Test: Pulse Width 300 usec, Duty Cycle < 2%

**600Amp Rectifier
20-45 Volts**

TWIN TOWER

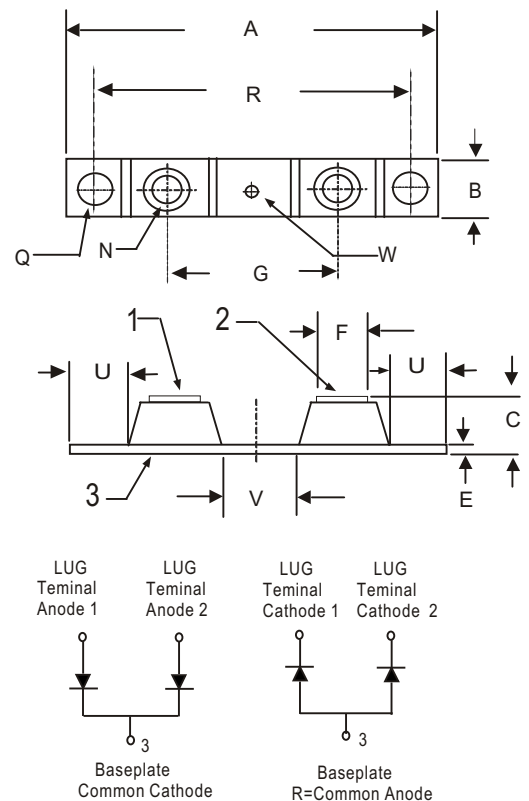

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	----	3.360	----	92.20	
B	0.700	0.800	17.78	20.32	
C	----	0.650	----	16.51	
E	0.120	0.130	3.05	3.30	
F	0.490	0.510	12.45	12.95	
G	1.379	BSC	35.02	BSC	
H	----	----	----	----	
N	1/4	- 20	UNC	FULL	
Q	0.275	0.290	6.99	7.37	2 PL
R	3.150	BSC	80.01	BSC	
U	0.600	----	15.24	----	
V	0.312	0.370	7.92	9.40	
W	0.180	0.195	4.57	4.95	

MBR60020CT(R) THRU MBR60045CT(R)

Figure .1-Typical Forward Characteristics

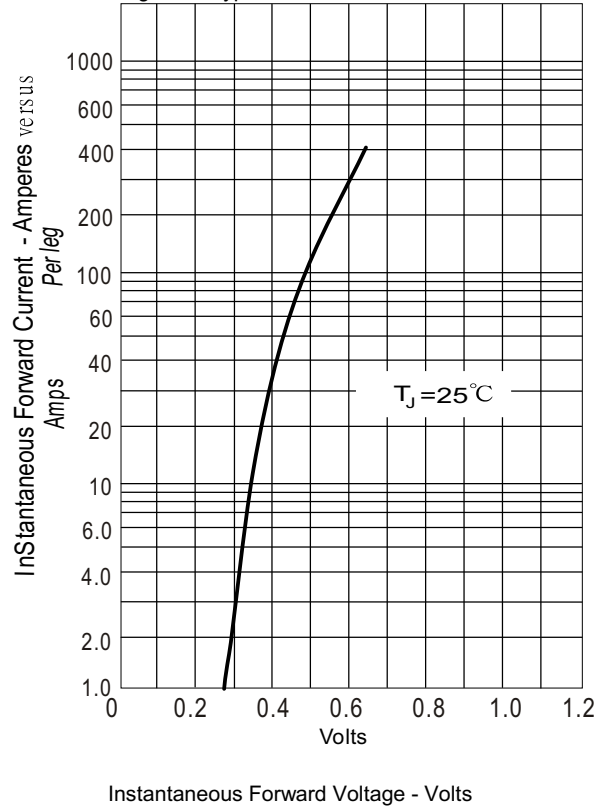


Figure .2- Forward Derating Curve

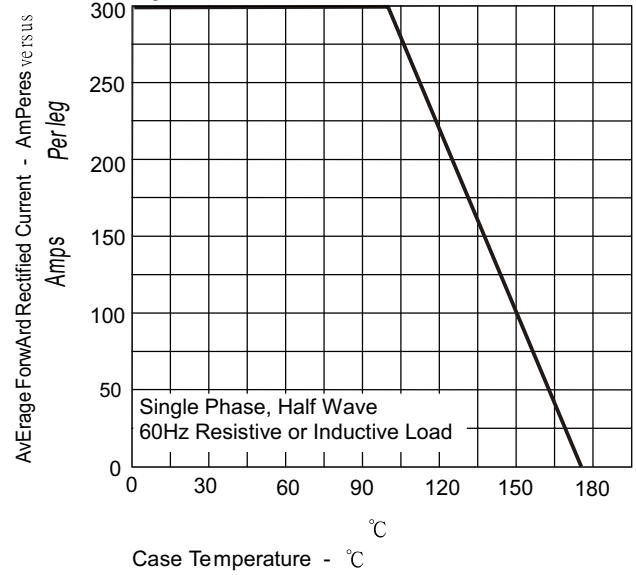


Figure .3- Peak Forward Surge Current

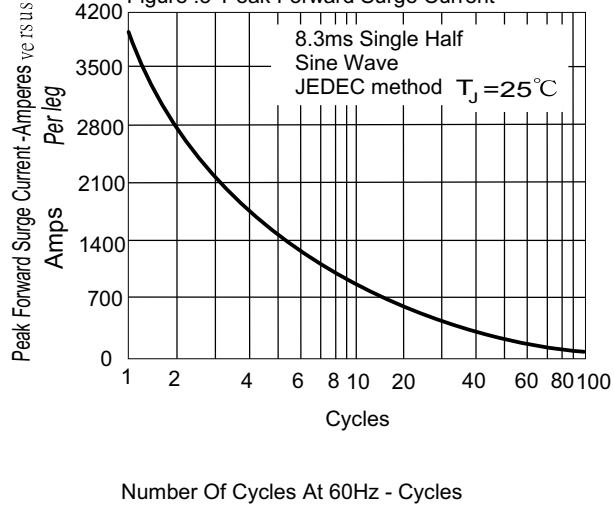


Figure .4-Typical Reverse Characteristics

