
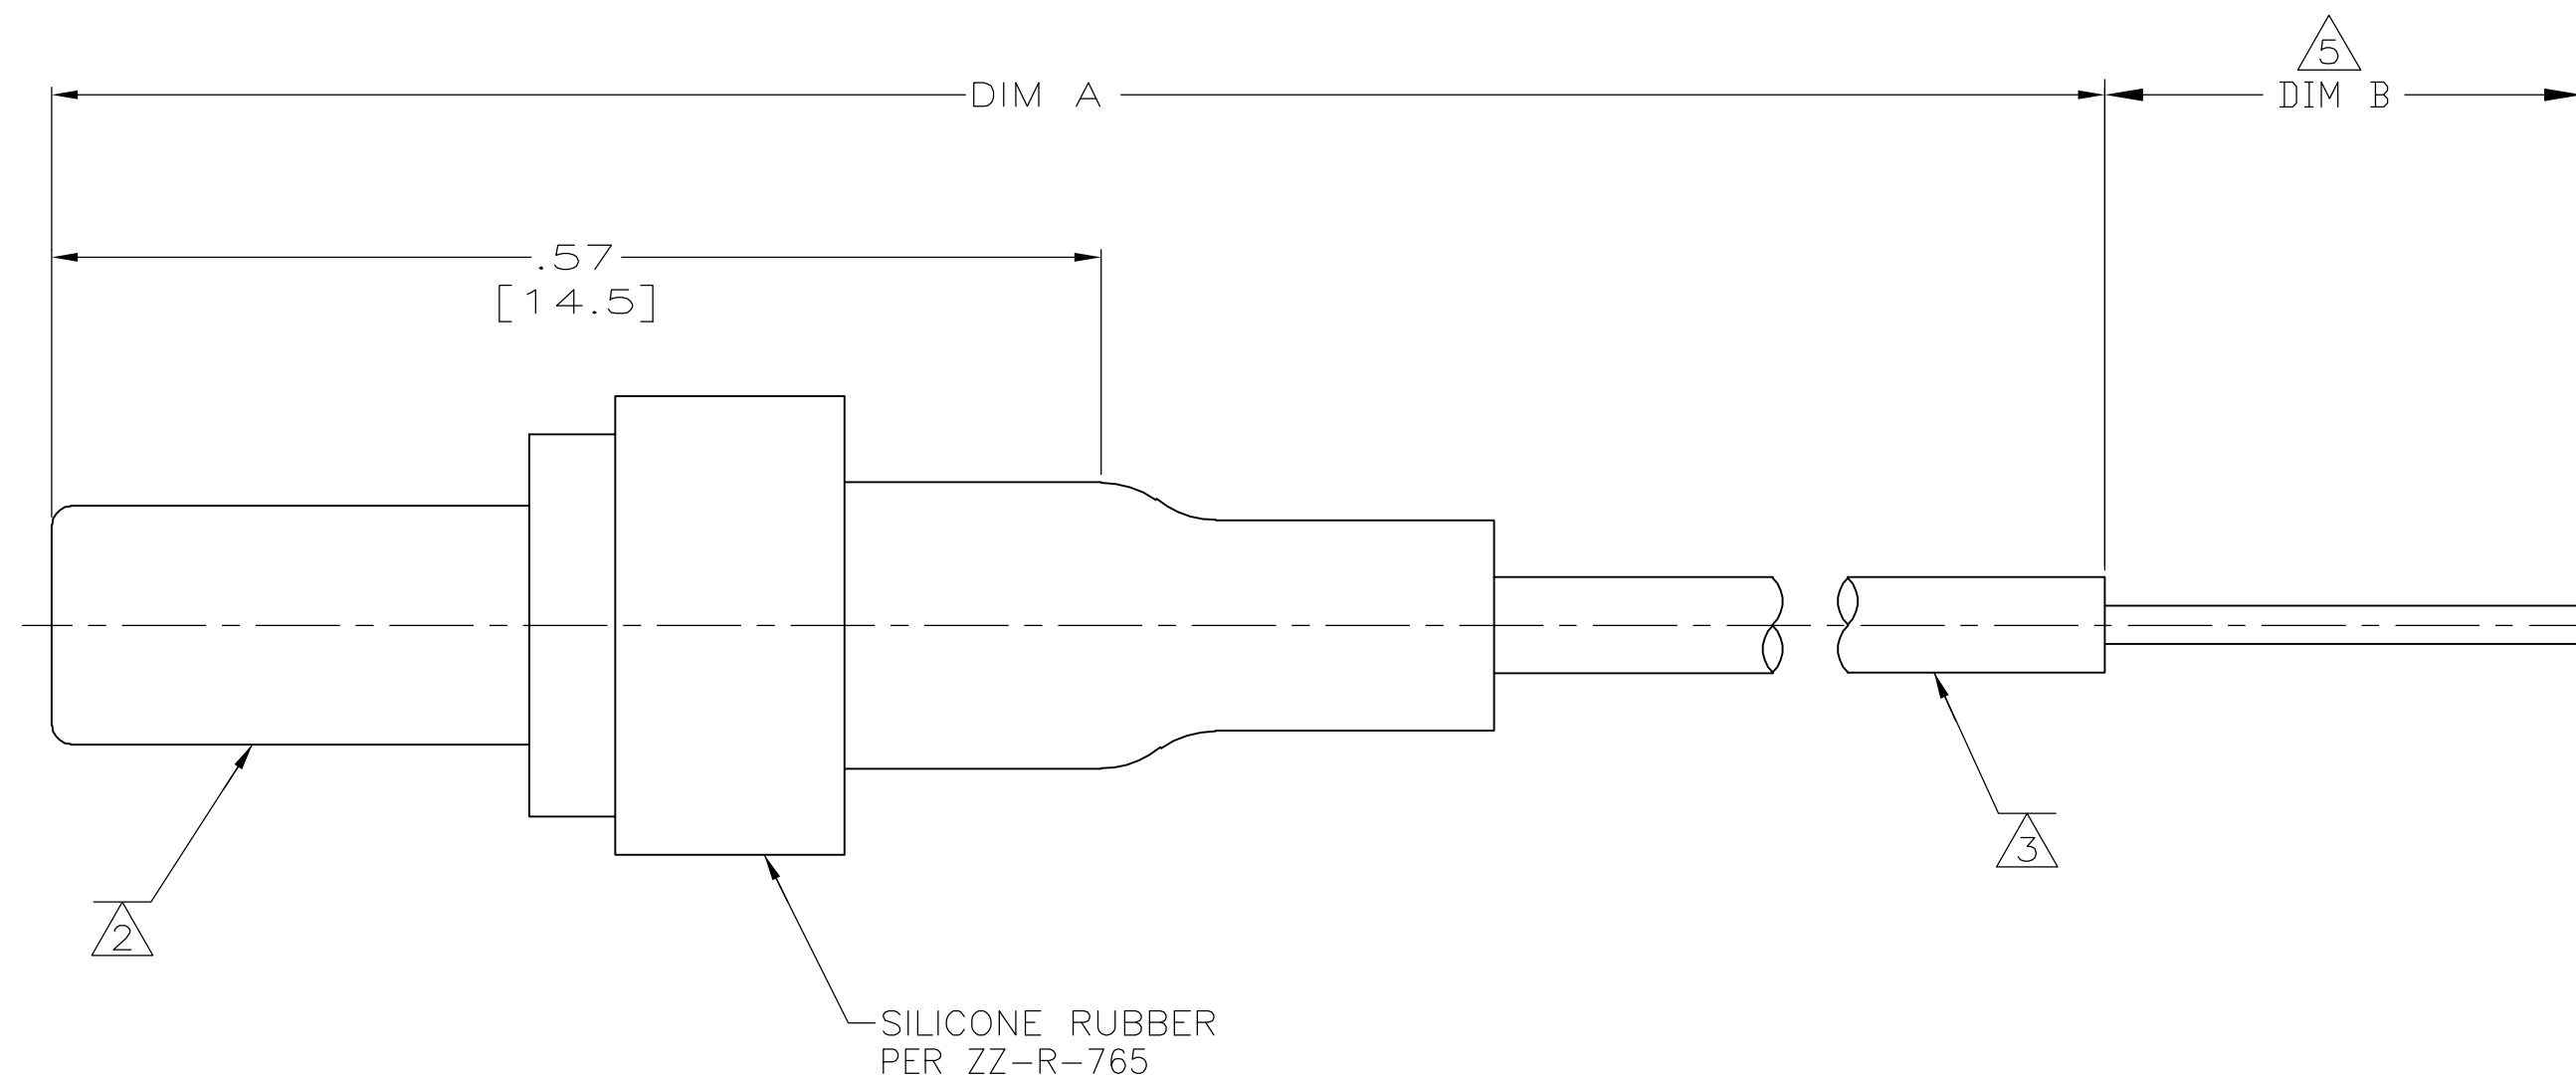


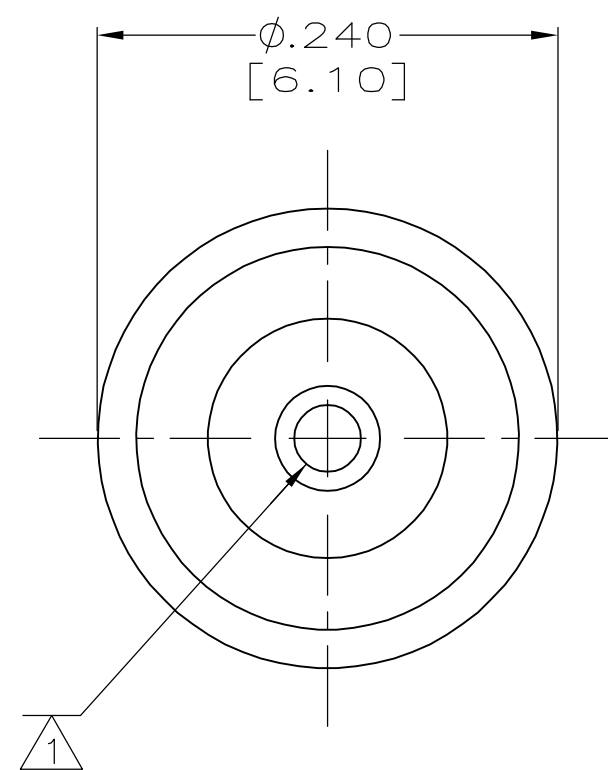

- ① SIZE 22 SOCKET CONTACT:
MAT'L: COPPER ALLOY PER MIL-C-39029
FINISH: GOLD PLATED .000050 [0.00127] MIN THK.
PER ASTM-B-488 OVER NICKEL PER QQ-N-290.
- ② PLUG HOUSING:
MAT'L: GLASS FILLED POLYETHERIMIDE RESIN.
- ③ CONDUCTOR:
24 (19/36) AWG SILVER PLATED COPPER
INSULATION: SILICONE COATED FEP; $\varnothing .060 \pm .005$ [1.52 $\pm$ 0.13].
4. OPERATING VOLTAGE: 12 KVDC AT 70,000 FT. ALTITUDE.
TEST VOLTAGE: 18 KVDC AT 70,000 FT. ALTITUDE.
- ⑤ PIGTAIL IS SOLDER DIPPED ON -1 & -2 ONLY.

---	9.25±.25 [234.95±6.35]	448660-3
.25±.06 [6.35±1.52]	72.00±.1.00 [1828.8±25.4]	448660-2
.25±.06 [6.35±1.52]	7.00±.25 [177.8±6.4]	448660-1
DIM B	DIM A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 8-17-98		 Tyco Electronics Corporation Harrisburg, PA 17105-3608	
		CHK D.EABY 8-17-98			
DIMENSIONS: INCHES [mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME PLUG ASSY, MICRO-MINIATURE, 240 SERIES LGH —	
		APVD D.EABY 8-17-98			
		PRODUCT SPEC —			
		APPLICATION SPEC —			
MATERIAL SEE CALLOUTS		FINISH SEE CALLOUTS		SIZE A2	
		WEIGHT —		CAGE CODE 00779	
				DRAWING NO C-448660	
				RESTRICTED TO —	
		CUSTOMER DRAWING		SCALE 10:1 SHEET 1 of 1 REV F	

CUSTOMER DRAWING	10.1
------------------	------