
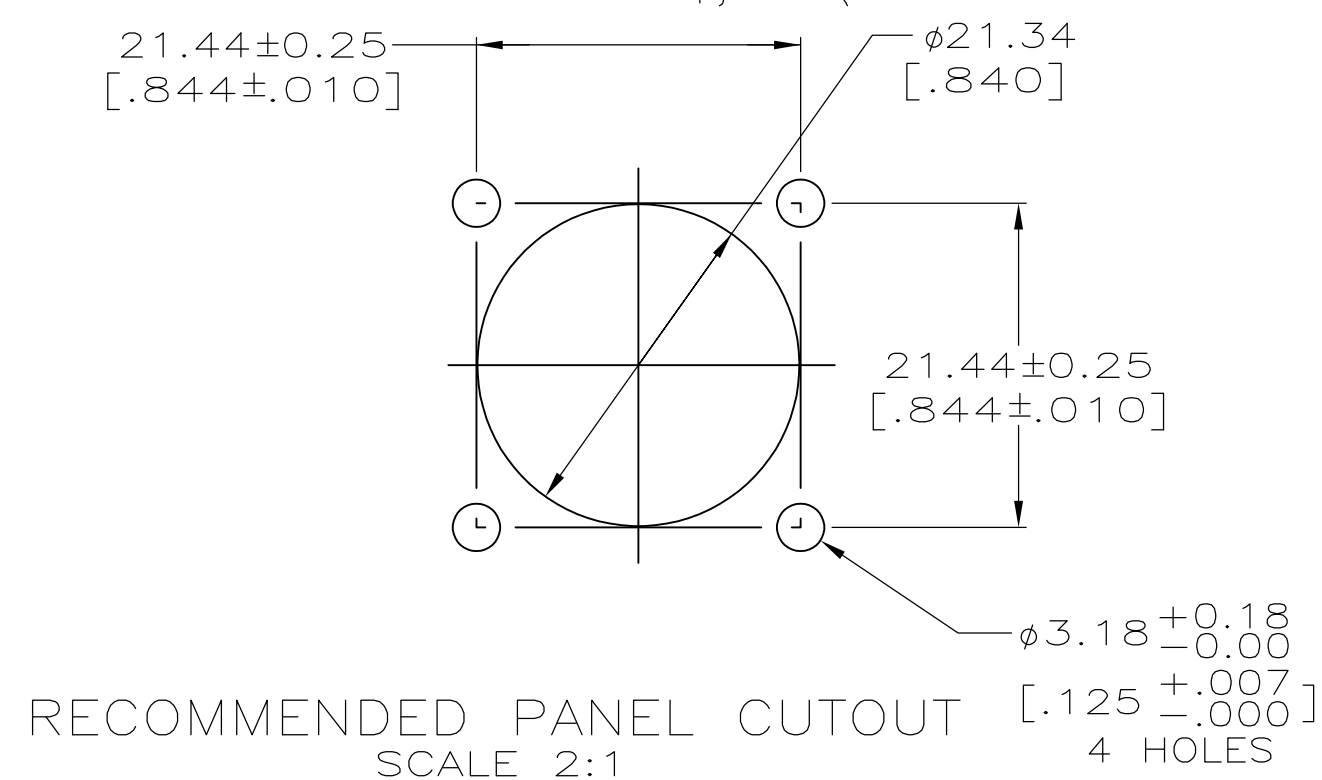
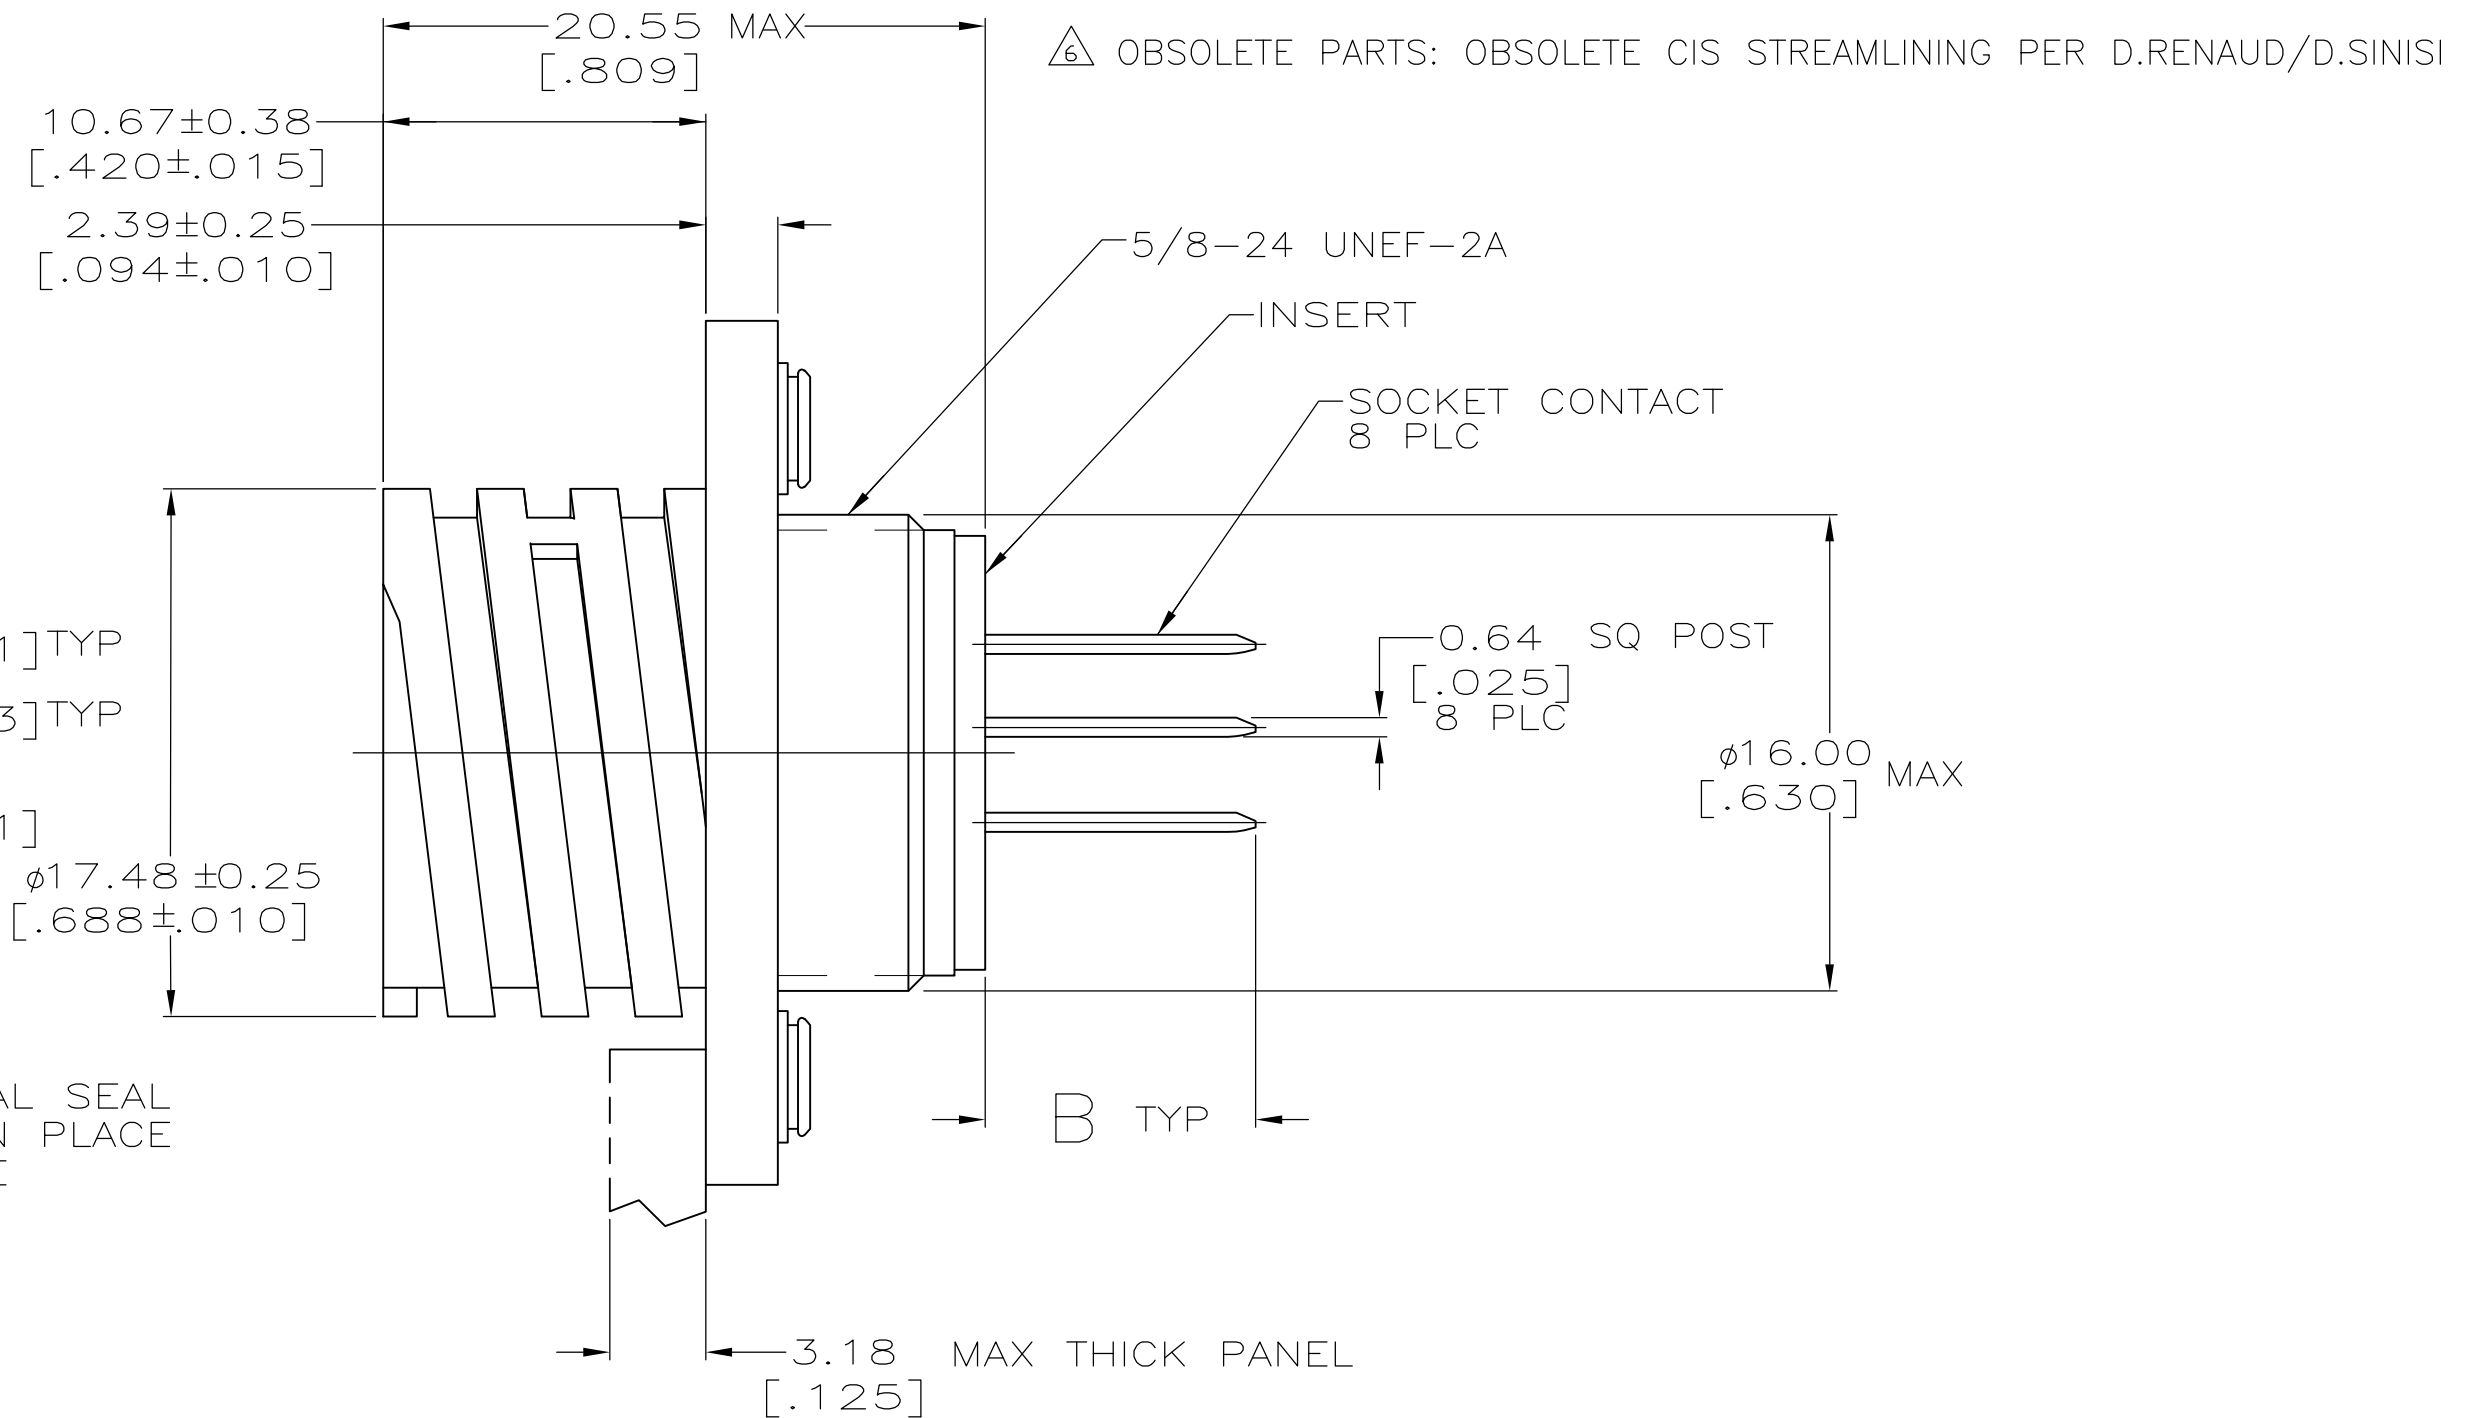


- ① AMP MOLDED ON THIS SURFACE.
- ② PART NUMBER AND DATE CODE MARKED ON THIS SURFACE.
- ③ NYLON, GLASS FILLED, FLAME RETARDANT, BLACK.
- ④ 0.76μm [.000030] MIN GOLD FOR A LENGTH OF 2.54 [.100] MIN FROM MATING END, 2.54μm [.000100] MIN TIN-LEAD FOR A LENGTH OF 9.70 [.382] MIN FROM OPPOSITE END, BOTH OVER 1.27μm [.000050] MIN NICKEL.
- ⑤ 0.76μm [.000030] MIN GOLD FOR A LENGTH OF 2.54 [.100] MIN FROM MATING END, 2.54μm [.000100] MIN TIN FOR A LENGTH OF 9.70 [.382] MIN FROM OPPOSITE END, BOTH OVER 1.27μm [.000050] MIN NICKEL.

REVISIONS						
P	LTR	DESCRIPTION	DATE	DWN	APVD	
	H	REVISED PER ECO-06-3414	2/22/06	SS	SH	
	H1	REVISED PER ECO-09-021510	11SEP09	KK	AEQ	
	J	REVISED PER ECO-17-004657	05APR2017	RS	MZ	

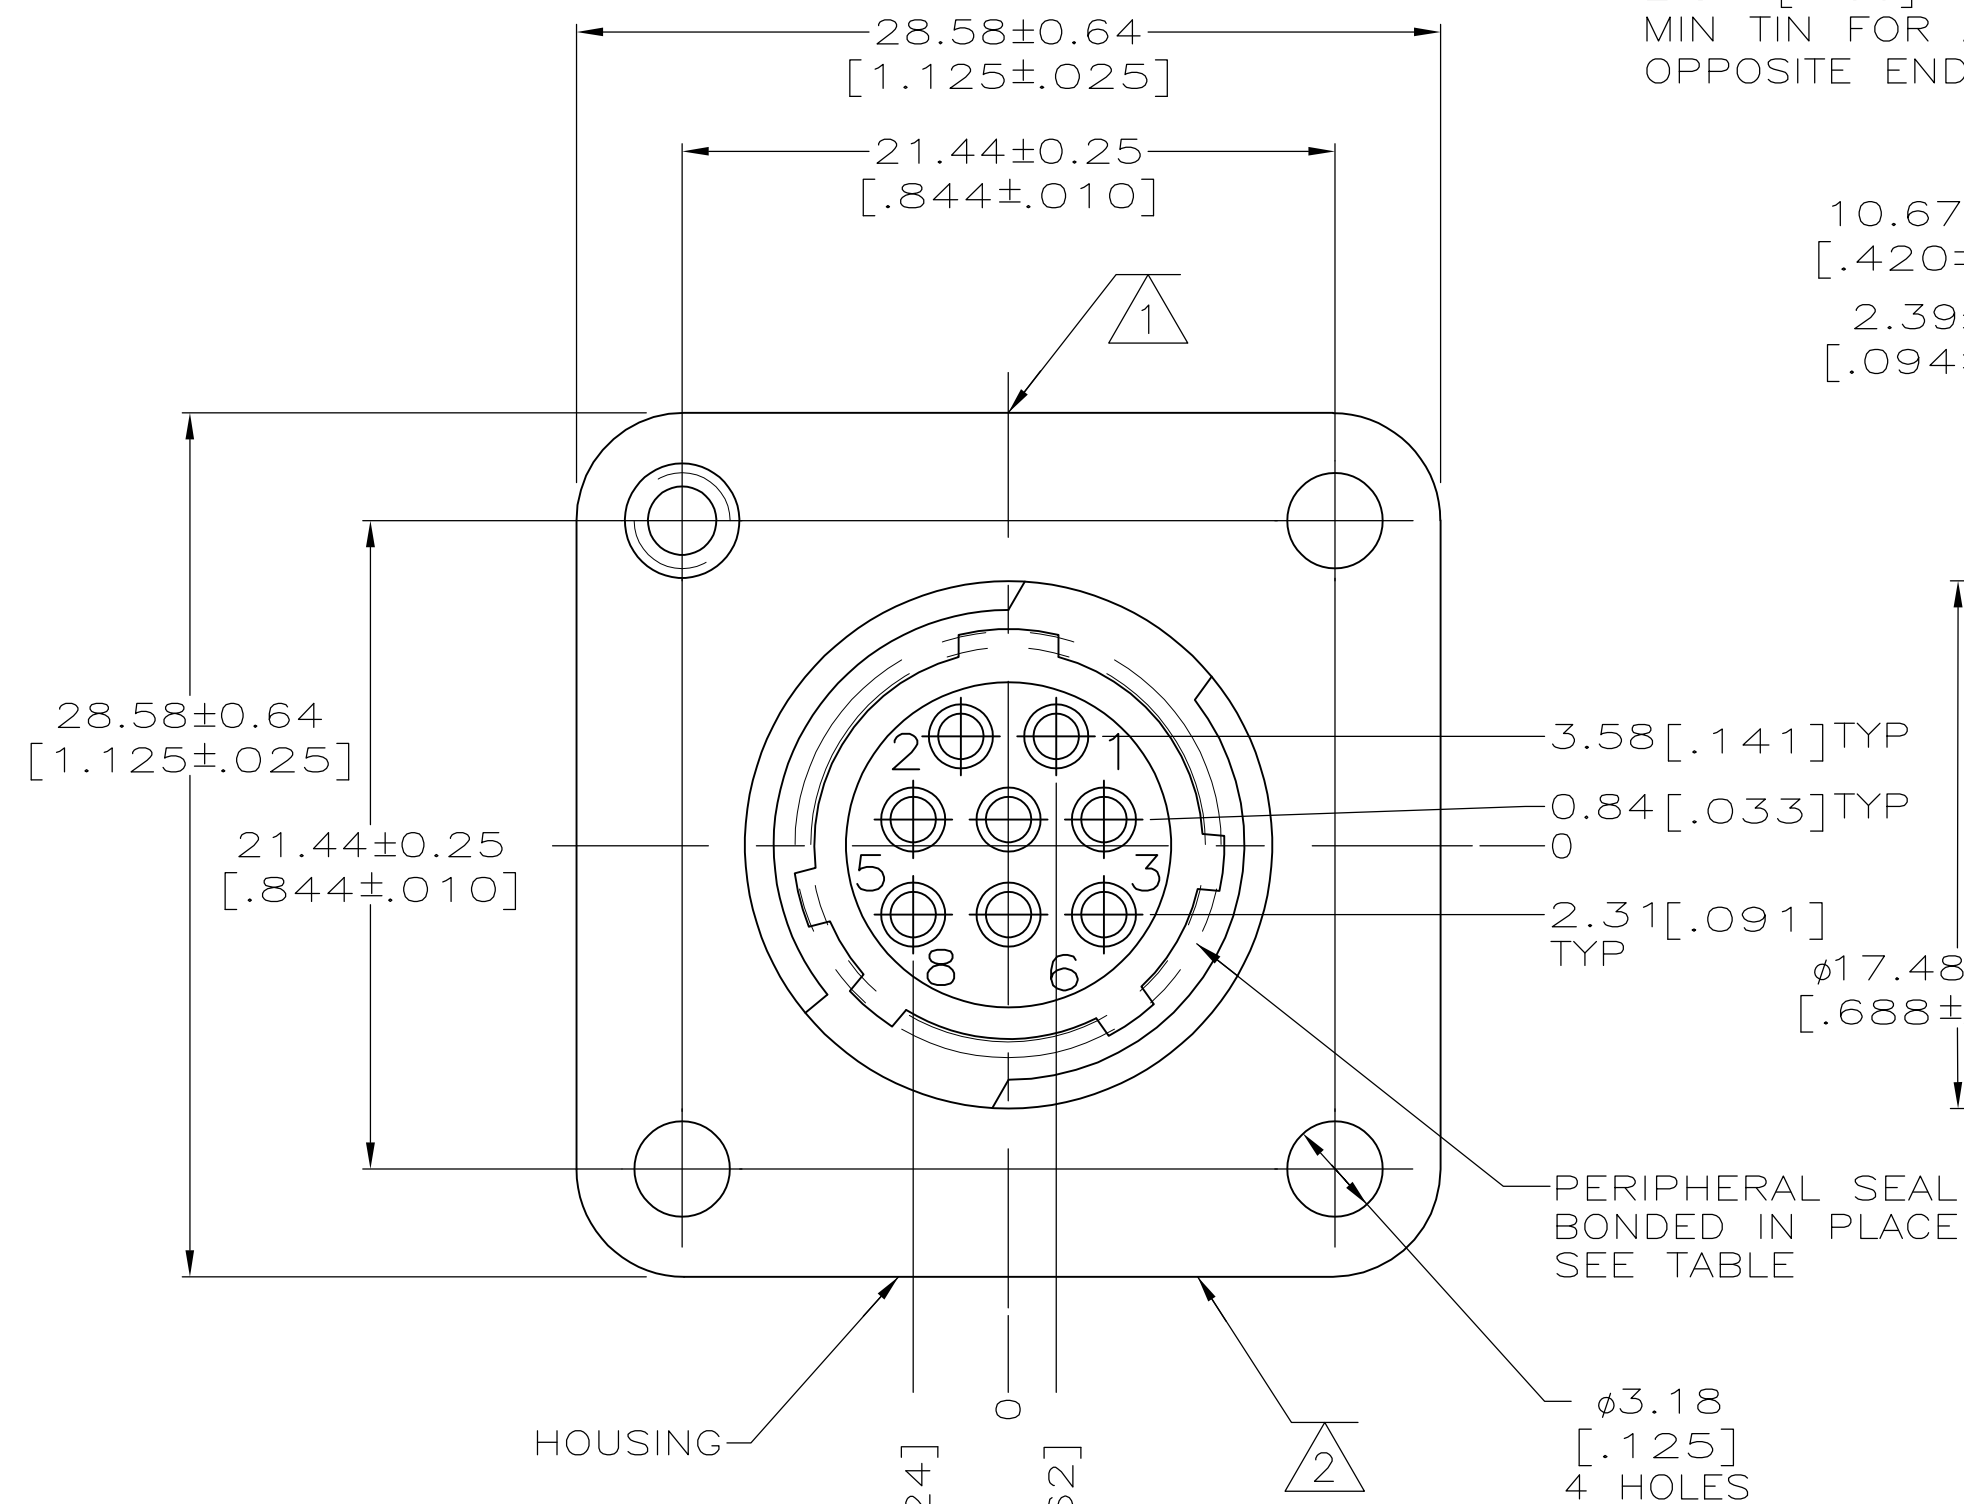

6	OBSOLETE	5	NO	NO	8.94 ± 0.76 [.352 $\pm$.030]	1-208657-1
		5	NO	YES	14.58 ± 0.76 [.574 $\pm$.030]	1-208657-0
		5	NO	NO	12.17 ± 0.76 [.479 $\pm$.030]	208657-9
		4	NO	NO	12.17 ± 0.76 [.479 $\pm$.030]	208657-8
OBSOLETE	OBSOLETE	4	YES	YES	14.58 ± 0.76 [.574 $\pm$.030]	208657-7
		4	NO	NO	8.94 ± 0.76 [.352 $\pm$.030]	208657-6
6	OBSOLETE	4	NO	YES	14.58 ± 0.76 [.574 $\pm$.030]	208657-5
		4	NO	YES	-	208657-4
		4	NO	NO	-	208657-3
		4	NO	NO	8.94 ± 0.76 [.352 $\pm$.030]	208657-2
OBSOLETE	OBSOLETE	4	NO	NO	8.94 ± 0.76 [.352 $\pm$.030]	208657-1
		CONTACT FINISH	PERIPHERAL SEAL	THREADED INSERT	DIM B	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 05/16/90 L. SIPE CHK 5/30/90 J. McCLINTON APVD 5/30/90 M. KAPCZYNSKI PRODUCT SPEC 108-10024 APPLICATION SPEC —		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± — 2 PLC ± 0.13 [.005] 3 PLC ± — 4 PLC ± — ANGLES ± —		NAME POSTED RECEPTACLE ASSEMBLY, ARRANGEMENT 11-8, TYPE 20 DF CONTACTS, CPC	
MATERIAL 4-40 THREADED INSERTS: BRASS HOUSING AND INSERT:  SOCKET CONTACTS: PHOSPHOR BRONZE		FINISH — WEIGHT —		SIZE A2	
				CAGE CODE 00779	
				DRAWING NO C=208657	
				RESTRICTED TO —	
CUSTOMER DRAWING				SCALE 4:1 SHEET 1 OF 1 REV 1	