
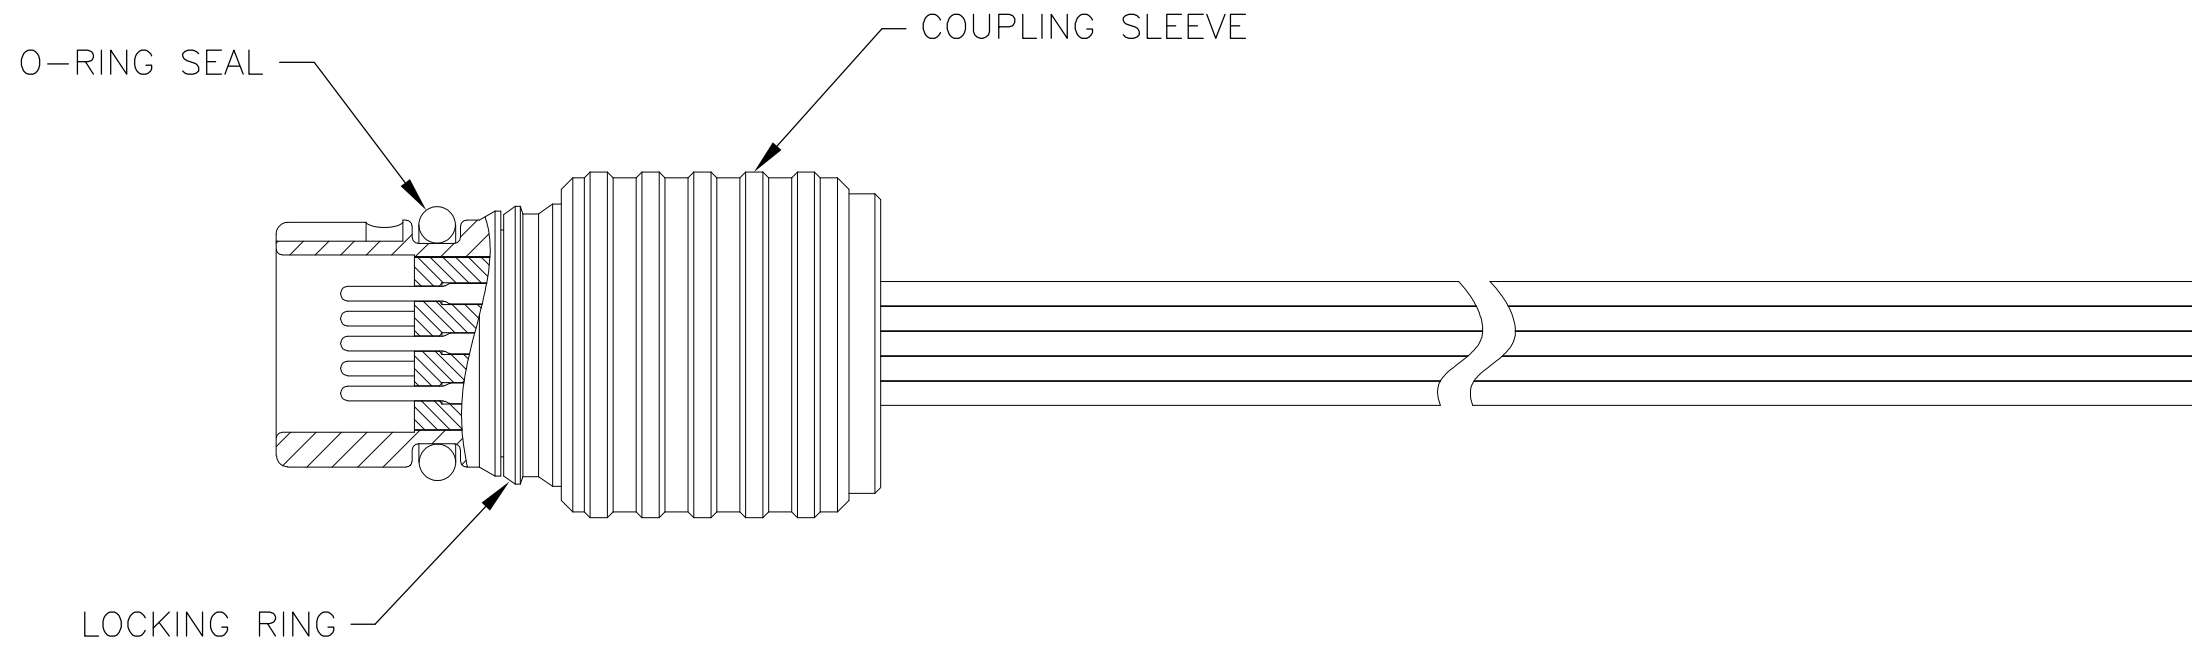
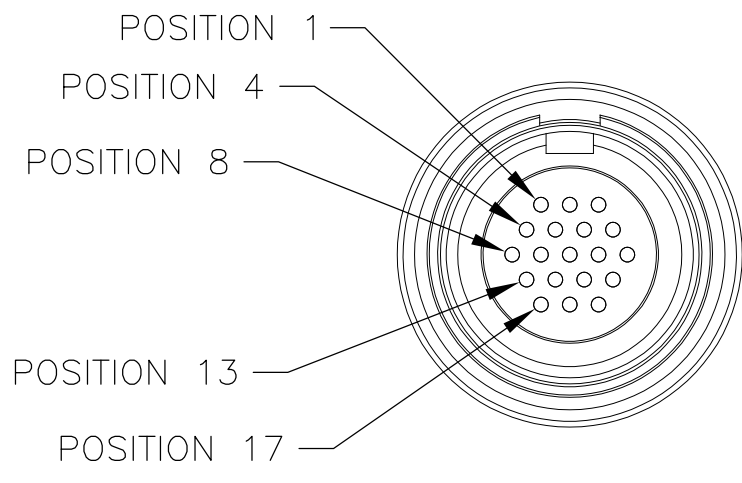
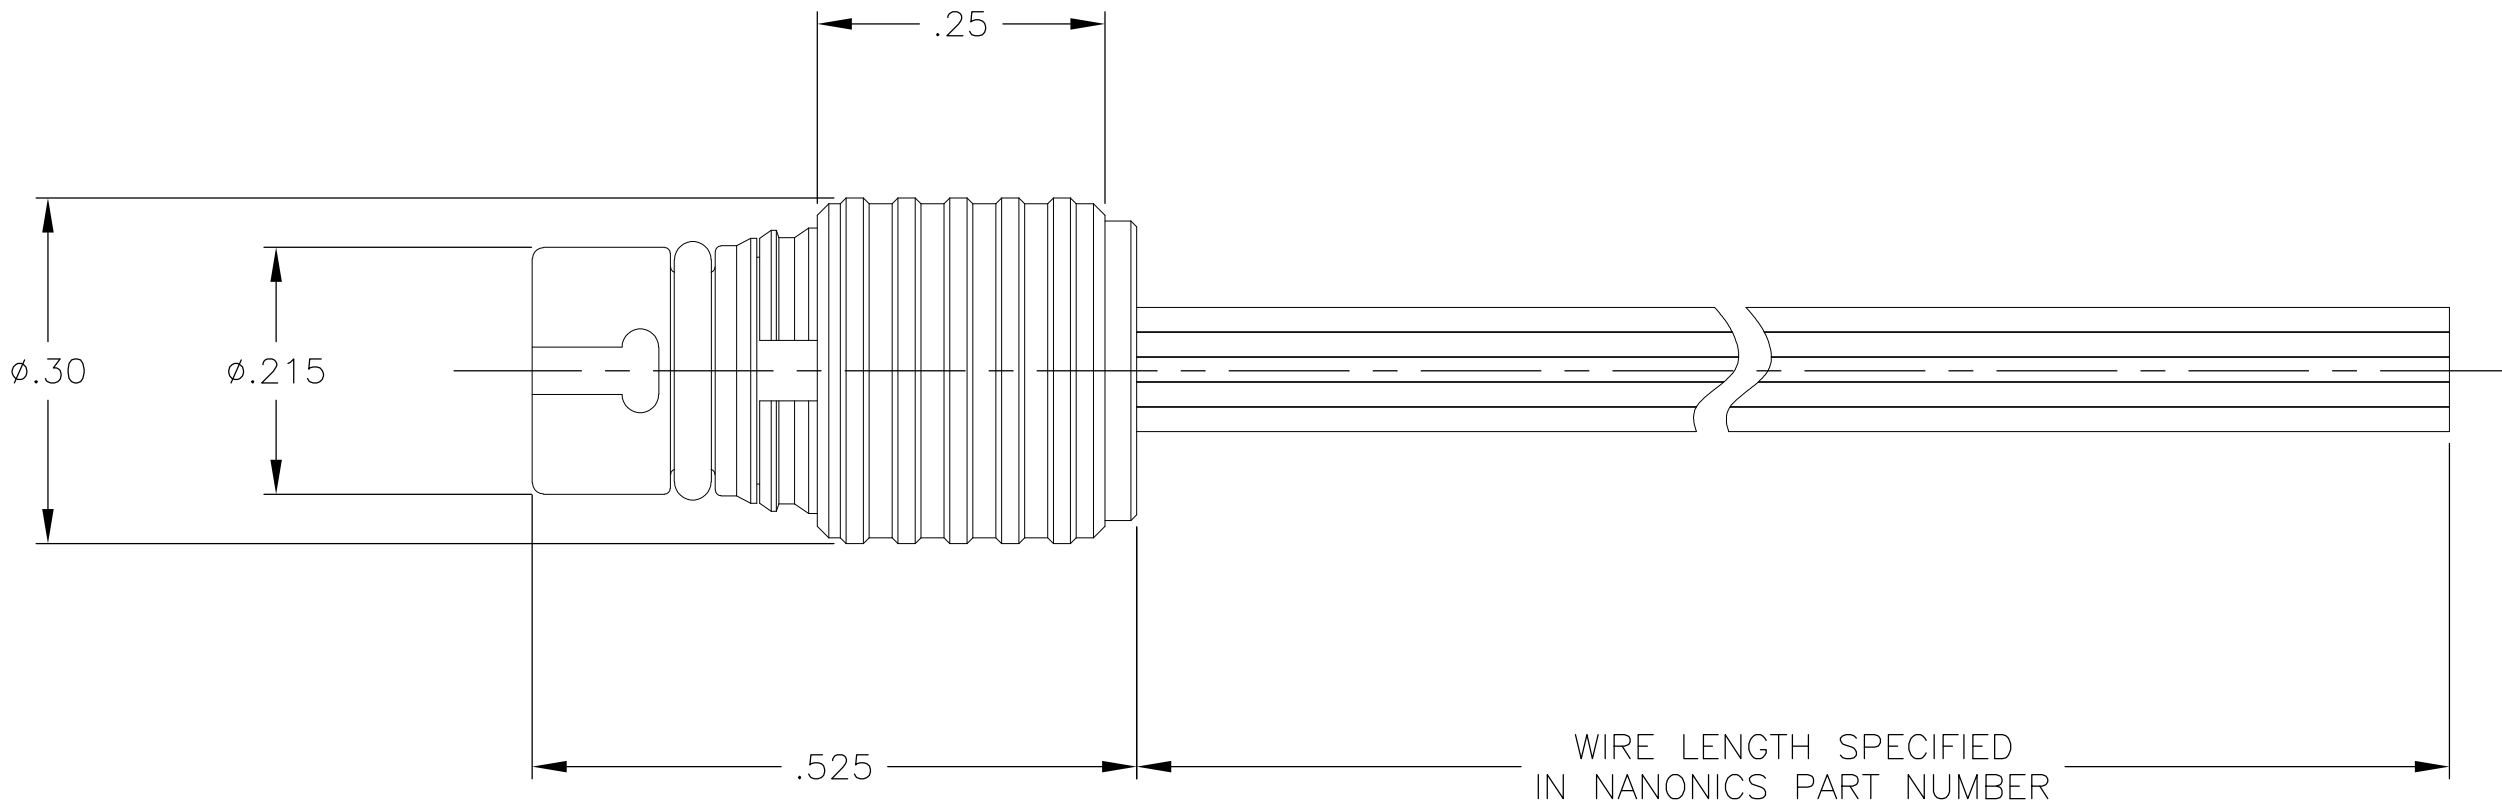


LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			G	UPDATE PER ECO-11-013056	23 JUN 11	CAS	MKS

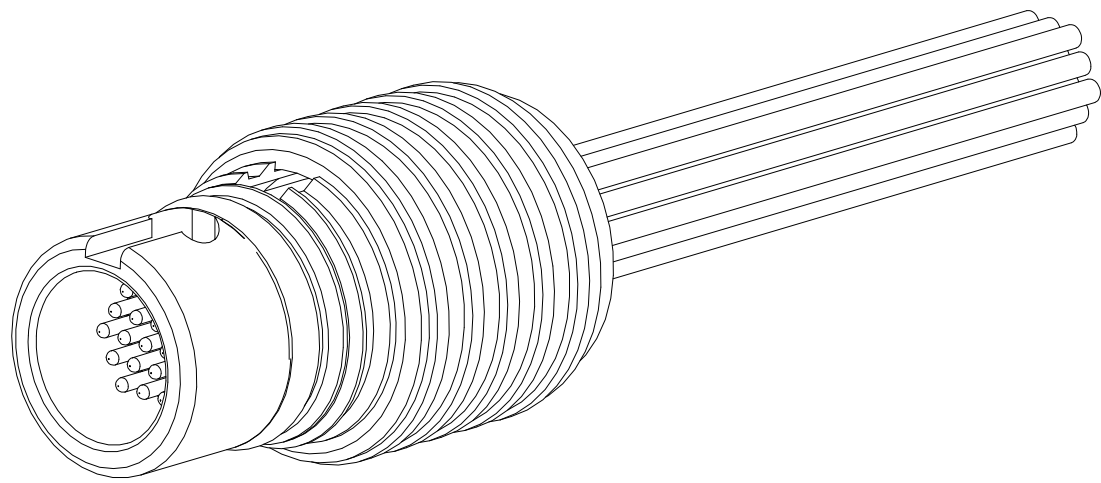


- 1
- CONNECTOR BODY AND COUPLING SLEEVE MATERIAL: 6061-T6 ALUMINUM, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
LOCKING RING MATERIAL: BERYLLIUM COPPER, ELECTROLESS NICKEL PLATED PER SAE-AMS-C-26074 OR SAE-AMS-2404E
INSULATOR MATERIAL: LIQUID CRYSTAL POLYMER (LCP) PER ASTM D5138 OR POLYPHENYLENE SULFIDE (PPS) PER ASTM D4067
O-RING MATERIAL: FLUOROSILICONE

- 2
- WIRE TERMINATION: 28 AWG SOLID, 30 AWG STRANDED WIRE OR SMALLER

- 3
- LUBRICATE O-RING WITH PARKER SUPER-O-LUBE PRIOR TO INSTALLATION

- 4
- THIS DRAWING ALSO IDENTIFIED AS NANONICS 303-0025

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. STORRY 8 APR 99	 TE Connectivity				
		CHK E. PAULUS 8 APR 99					
DIMENSIONS: INCHES		APVD S. KAIN 26 JAN 00	NAME PLUG ASSEMBLY, CIRCULAR, QUICK DISCONNECT, METAL, 19 POSITION				
		PRODUCT SPEC —					
		APPLICATION SPEC —	SIZE	CAGE CODE	DRAWING NO		RESTRICTED TO
MATERIAL		WEIGHT —	A2	0PJN9	C=1589057		—
SEE NOTES		SEE NOTES	CUSTOMER DRAWING		SCALE 6:1	SHEET 1 of 1	REV G