



Main

Range of product	Preventa Safety automation
Product or component type	Safety controller with pre-defined function
Safety module name	XPSMP
Safety module application	2 independent functions
Safety use category	Category 4 maximum conforming to EN/IEC 60954-1
Type of start	Automatic or unmonitored (configuration 1) Automatic or unmonitored (configuration 10) Automatic or unmonitored (configuration 11) Automatic or unmonitored (configuration 14) Automatic or unmonitored (configuration 3) Automatic or unmonitored (configuration 5) Automatic or unmonitored (configuration 7) Monitored (configuration 12) Monitored (configuration 13) Monitored (configuration 15) Monitored (configuration 2) Monitored (configuration 4) Monitored (configuration 6) Monitored (configuration 8) Monitored (configuration 9)
Checks	Configuration (configuration 10) Configuration (configuration 13) Configuration (configuration 3) Configuration (configuration 4) Configuration (configuration 5) Configuration (configuration 6) Configuration (configuration 9)
Standards	DIN V VDE 801 + A1 EN/IEC 60204-1 EN/IEC 60947-1 + A11 EN/IEC 60947-5-1
Product certifications	BIA CSA UL
[Us] rated supply voltage	24 V DC (- 20...20 %)
Connections - terminals	Captive screw clamp terminals: 0.14...0.75 mm ² , 2 wires flexible without cable end Captive screw clamp terminals: 0.14...0.75 mm ² , 2 wires solid without cable end Captive screw clamp terminals: 0.14...2.5 mm ² , 1 wire flexible without cable end Captive screw clamp terminals: 0.14...2.5 mm ² , 1 wire solid without cable end Captive screw clamp terminals: 0.25...1 mm ² , 2 wires flexible with cable end, without bezel Captive screw clamp terminals: 0.25...1.5 mm ² , 1 wire flexible with cable end, with bezel Captive screw clamp terminals: 0.25...2.5 mm ² , 1 wire flexible with cable end, without bezel Captive screw clamp terminals: 0.5...1.5 mm ² , 2 wires flexible with cable end, with double bezel
Safety level	Can reach SIL 3 conforming to EN/IEC 62061 Can reach PL e/category 4 conforming to EN/ISO 13849-1

Complementary

Function of module	Configuration 0: functions disabled (factory setting) Configuration 1: emergency stop monitoring 1-channel wiring, category 2 Configuration 10: enabling grip switch monitoring (3-position switch), category 4 Configuration 11: sensing mat and edges monitoring, category 3 Configuration 12: sensing mat and edges monitoring, category 3 Configuration 13: relay output safety light curtain monitoring, category 4
--------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Configuration 14: coded magnetic switch monitoring, category 4
 Configuration 15: coded magnetic switch monitoring, category 4
 Configuration 2: emergency stop monitoring 1-channel wiring, category 2
 Configuration 3: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4
 Configuration 4: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4
 Configuration 5: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4
 Configuration 6: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4
 Configuration 7: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4
 Configuration 8: emergency stop monitoring 2-channel wiring, or guard monitoring, category 4
 Configuration 9: guard monitoring for injection presses and blowing machines, category 4

Synchronisation time between inputs	0.5 s (configuration 13) 1.5 s (configuration 14) 1.5 s (configuration 15) 1.5 s (configuration 5) 1.5 s (configuration 6) 1.5 s (configuration 9) Unlimited (configuration 3) Unlimited (configuration 4) Unlimited (configuration 7) Unlimited (configuration 8)
Power consumption in W	<= 5 W
Input protection type	Internal, electronic
[Uc] control circuit voltage	24 V
Line resistance	100 Ohm 2000 m
Number of safety circuits	3 NO relays per function (6 NO total), volt-free
Number of additional circuits	3 solid state outputs
Breaking capacity	C300: holding 180 VA AC-15 relay output C300: inrush 1800 VA AC-15 relay output
Breaking capacity	20 mA/24 V for static output circuit 1.5 A/24 V - L/R = 50 ms, DC-13 relay output
Output thermal current	2 A for 1 output and 4 A for the other 2 outputs relay 3.3 A for all 3 outputs relay simultaneously 6 A for 1 output and 2 A for the other 2 outputs relay
[Ith] conventional free air thermal current	<= 20 A
Associated fuse rating	4 A gG relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200 6 A fast blow relay output conforming to EN/IEC 60947-5-1, DIN VDE 0660 part 200
Minimum output current	10 mA relay output
Minimum output voltage	17 V relay output
Response time on input open	< 30 ms
[Ui] rated insulation voltage	300 V, degree of pollution 2 conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
[Uimp] rated impulse withstand voltage	4 kV overvoltage category III conforming to EN/IEC 60947-5-1, DIN VDE 0110 parts 1 & 2
Local signalling	12 LEDs
Mounting support	35 mm symmetrical DIN rail
Depth	4.49 in (114 mm)
Height	3.9 in (99 mm)
Width	1.77 in (45 mm)
Product weight	0.71 lb(US) (0.32 kg)

Environment

IP degree of protection	IP20 (terminals) IP40 (enclosure)
ambient air temperature for operation	14...131 °F (-10...55 °C)
ambient air temperature for storage	-13...185 °F (-25...85 °C)

Offer Sustainability

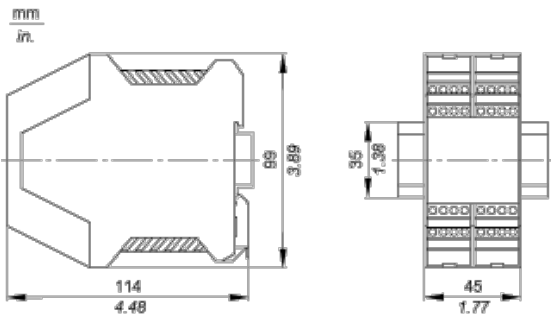
WARNING: This product can expose you to chemicals WARNING: This product can expose you to chemicals including:

including:	
Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.	Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm.
For more information go to www.p65warnings.ca.gov	For more information go to www.p65warnings.ca.gov

Contractual warranty

Warranty period	18 months
-----------------	-----------


Dimensions



Wiring Diagrams

Refer to the Instruction Sheet

To download the instruction sheet, follow below procedure:



XPSAC5121
module XPSAC - Emergency stop - 24 V AC DC

[Download XPSAC5121 product datasheet](#)

Discover XPSAC5121 by

- Characteristics
- Dimensions Drawings
- Connections and Schema
- Technical Description
- Download & Documents**

Download & Documents 1 to 3 of 3 (Total: -1)

Instruction sheet

XPSAC... Safety module for emergency stop and switch monitoring English 2012-07-04 pdf (29)

Image of product

Emergency stop and switch monitoring 2010-11-10 [Select :]


Certificate






Russian certificate English 2010-07-07 pdf (60)

1 Click on **Download & Documents**.

2 Click on **Instruction sheet**.

Safety Functions

	<ul style="list-style-type: none"> Emergency stop monitoring, 1 channel wiring: <ul style="list-style-type: none"> 1 channel Emergency stop, automatic or unmonitored start. 1 channel Emergency stop, monitored start. Emergency stop monitoring, 2 channel wiring: <ul style="list-style-type: none"> 2 channel Emergency stop, automatic or unmonitored start. 2 channel Emergency stop, monitored start.
-------------------------------------------------------------------------------------	----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	<ul style="list-style-type: none"> Coded magnetic switch monitoring: <ul style="list-style-type: none"> Automatic or unmonitored start, synchronization time = 1,5 s. Monitored start, synchronization time = 1,5 s.
	<ul style="list-style-type: none"> Guard monitoring with start test: <ul style="list-style-type: none"> Locking of guard with start test, automatic or unmonitored start. Locking of guard with start test, monitored start. Guard monitoring with start test and synchronization time = 1,5 ms: <ul style="list-style-type: none"> Locking of guard with start test, automatic or unmonitored start. Locking of guard with start test, monitored start. Guard monitoring for injection press or blowing machine.
	<ul style="list-style-type: none"> Enabling switch monitoring, safety mat monitoring: <ul style="list-style-type: none"> Enabling switch monitoring, with or without start-up preparation. Safety mat monitoring, automatic or unmonitored start.
	<ul style="list-style-type: none"> Sensing mat monitoring, monitored start.
	<ul style="list-style-type: none"> Light curtain monitoring, monitored start, synchronization time = 0,5 s.