

Driving Green Solutions

Hall-Effect Sensors Latch & Switch IC Portfolio

Quick Reference

Rev.005, June 2010

Table of Contents

Table 1. General Purpose Latch & Switch - Quick Selector	2
Figure 1. General Purpose Latch & Switch Graph Selector by Operating Voltage and Magnetic Sensitivity.....	3
Table 2. General Purpose Dual Latch - Quick Selector	4
Figure 2. General Purpose Dual Latch Graph Selector by Operating Voltage and Magnetic Sensitivity	4
Table 3. Low Power / Energy-Saving Latch & Switch - Quick Selector.....	5
Figure 3. Low Power / Energy-Saving Latch & Switch Graph Selector by Operating Voltage and Magnetic Sensitivity.....	5
Table 4. Package pictures.....	6
Figure 4. Hall-Effect Latch & Switch Automotive Application Examples	7

Table 1. General Purpose Latch & Switch - Quick Selector

Type		Part Number	Sensitivity	B _{OP} / B _{RP} (typical)	Supply Voltage	Operating Temperature		Output Type	Integrated Protection ⁽¹⁾		Package & Pole Active ⁽²⁾			Remark
			⁽³⁾	mT ⁽⁴⁾	V	-40~85°C	-40~150°C		RVP	OCL	TSOT	UA	UTQFN	
Latch Bipolar Switch	NEW	MLX92211	Very High	+/- 3	2.7~24		✓	Open Drain	✓	✓	S			TC = -1000ppm/degC, UnderVoltage LockOut, Output Auto-ShutOff, Thermal ShutDown, TSOT "die-up"
		US1881	High	+/- 5	3.5~24	✓	✓	Open Drain			N	S		
		US1882	Low	+/- 20	3.5~24		✓	Open Drain				S		
	NEW	US1883	Medium	+/- 14	3.5~24		✓	Open Drain				S		
		US2881	Very High	+/- 3	3.5~24	✓	✓	Open Drain			N	S	S	
		US2882	Very High	+/- 3	3.5~24	✓	✓	Open Drain			N	S		
		US2884	Very High	+/- 3	3.5~24		✓	Open Drain			S			
		US3881	High	+/- 5	2.2~18	✓	✓	Open Drain			N	S		
		US4881	Very High	+/- 3	2.2~18	✓	✓	Open Drain			N	S	S	
Unipolar Switch	NEW	US5681	High	3.5 / 5.5	3.5~24	✓		Open Drain			S			
	NEW	US5682	High	3.5 / 5.5	3.5~24	✓		Open Drain			S(*)			(*) - Reversed output polarity vs. US5681
		US5781	Medium	7.5 / 12	3.5~24	✓	✓	Open Drain			N	S		
		US5782	Medium	7.5 / 12	3.5~24	✓	✓	Open Drain			S			
		US5881	Low	20 / 25	3.5~24	✓	✓	Open Drain			N	S		

For more detailed information about the device performance, please refer to the latest datasheet revision available on our website or contact our sales force.

¹ RVP = Reverse Voltage Protection; OCL = Output Current Limit

² Pole Active = magnetic pole needed to be applied on the branded side of the package to turn the output low or active

³ Sensitivity referred to B_{OP} max value : Very High < 6mT; High < 10mT; Medium < 20mT; Low > 20mT

⁴ 1mT = 10 Gauss



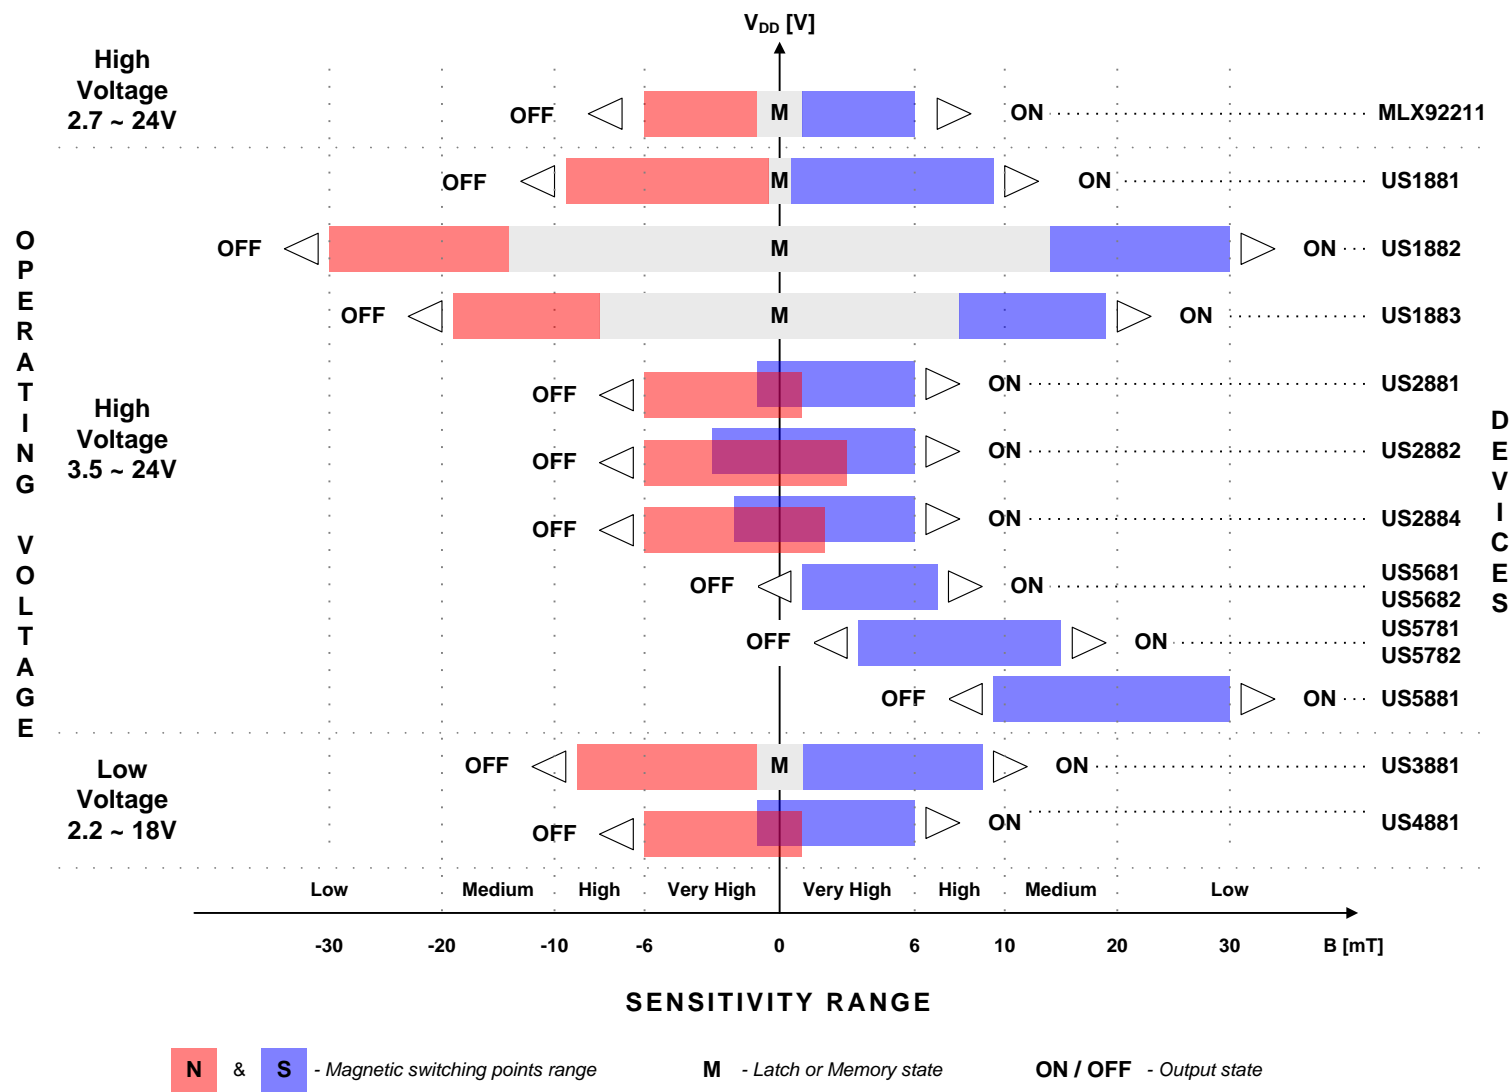


Figure 1. General Purpose Latch & Switch Graph Selector by Operating Voltage and Magnetic Sensitivity



Table 2. General Purpose Dual Latch - Quick Selector

Type		Part Number	Sensitivity	B _{OP} / B _{RP} (typical)	Hall Plate Spacing	Supply Voltage	Operating Temperature	Output Types	Available Output Option ⁽¹⁾		Integrated Protection ⁽²⁾		Package & Pole Active ⁽³⁾		Remark
				mT ⁽⁴⁾	mm	V	°C		SP + DIR	H ₁ + H ₂	RVP	OCL	TSOT	VA	
Dual Latch	NEW	MLX92251	Medium	+/- 7	1.45	2.7~24	-40~150	Open Drain	✓		✓	✓	S		Flat TC Output Auto-ShutOff UnderVoltage LockOut
		MLX90224	Very High	+/- 2.5	1.85	4.5~16	-40~150	Open Drain	✓	✓				S	

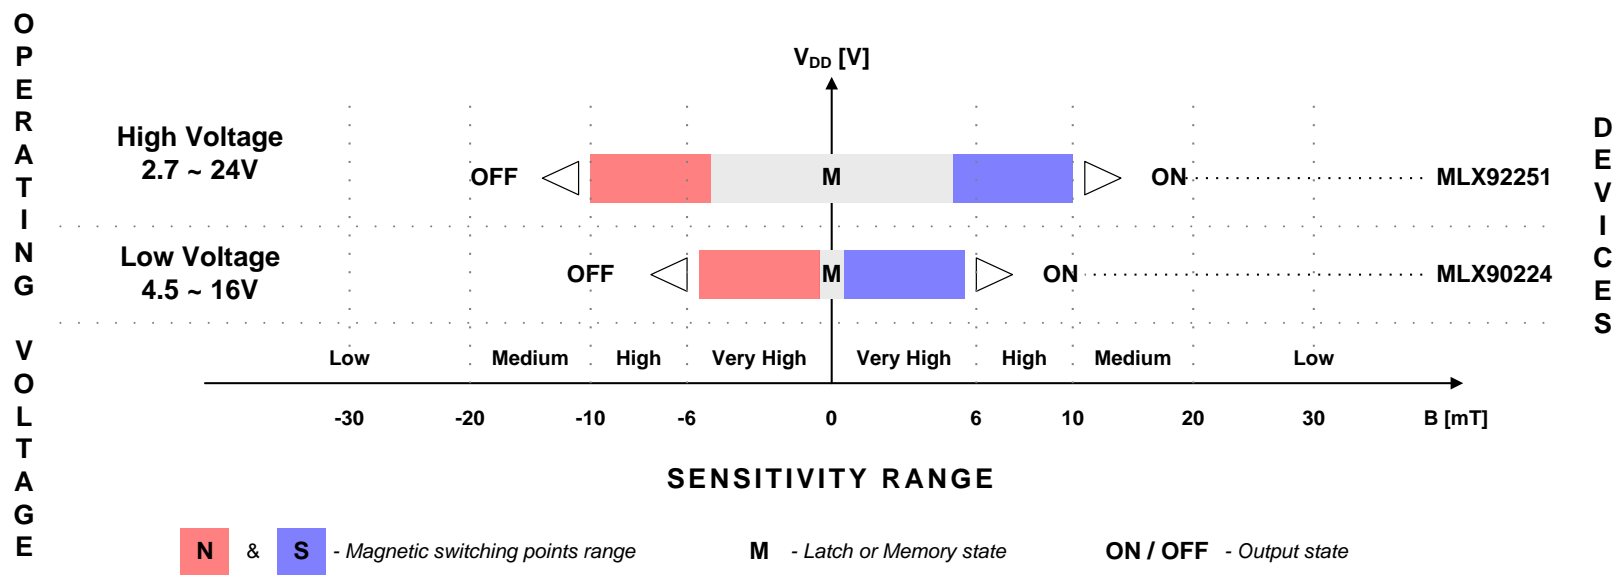


Figure 2. General Purpose Dual Latch Graph Selector by Operating Voltage and Magnetic Sensitivity

¹ SP + DIR = Speed (Hall 1) + Direction signals; H₁ + H₂ = Hall 1 + Hall 2 signals

² RVP = Reverse Voltage Protection; OCL = Output Current Limit

³ Pole Active = magnetic pole needed to be applied on the branded side of the package to turn the output low or active

⁴ 1mT = 10 Gauss

Table 3. Low Power / Energy-Saving Latch & Switch - Quick Selector

Type		Part Number	Supply Voltage	Current Consumption	Sensitivity	B _{OP} / B _{RP} (typical)	Output Refresh Period	Operating Temperature	Output Type	Package & Pole Active ⁽³⁾		Remark
			V	Average		mT ⁽⁴⁾	ms	°C		TSOT	UTQFN	
Latch		MLX92213	1.6~3.6	48µA @3V 36µA @1.8V	Ultra High	+/- 2	1.3	-40~85	Push-Pull		S	Advanced power manageability through EN pin
Omnipolar Switch		MLX90248 <i>New Generation</i>	1.5~3.6	5µA @3V 3µA @1.8V	Very High	3.5 / 2.5	40	-40~85	Open Drain	N & S	N & S	
	NEW	MLX90248-P	1.5~3.6	5µA @3V 3µA @1.8V	Very High	3.5 / 2.5	40	-40~85	Push Pull	N & S		
		MLX90248-H	3.5~5.5	25µA @5V	Very High	3.5 / 2.5	25	-40~85	Open Drain	N & S		

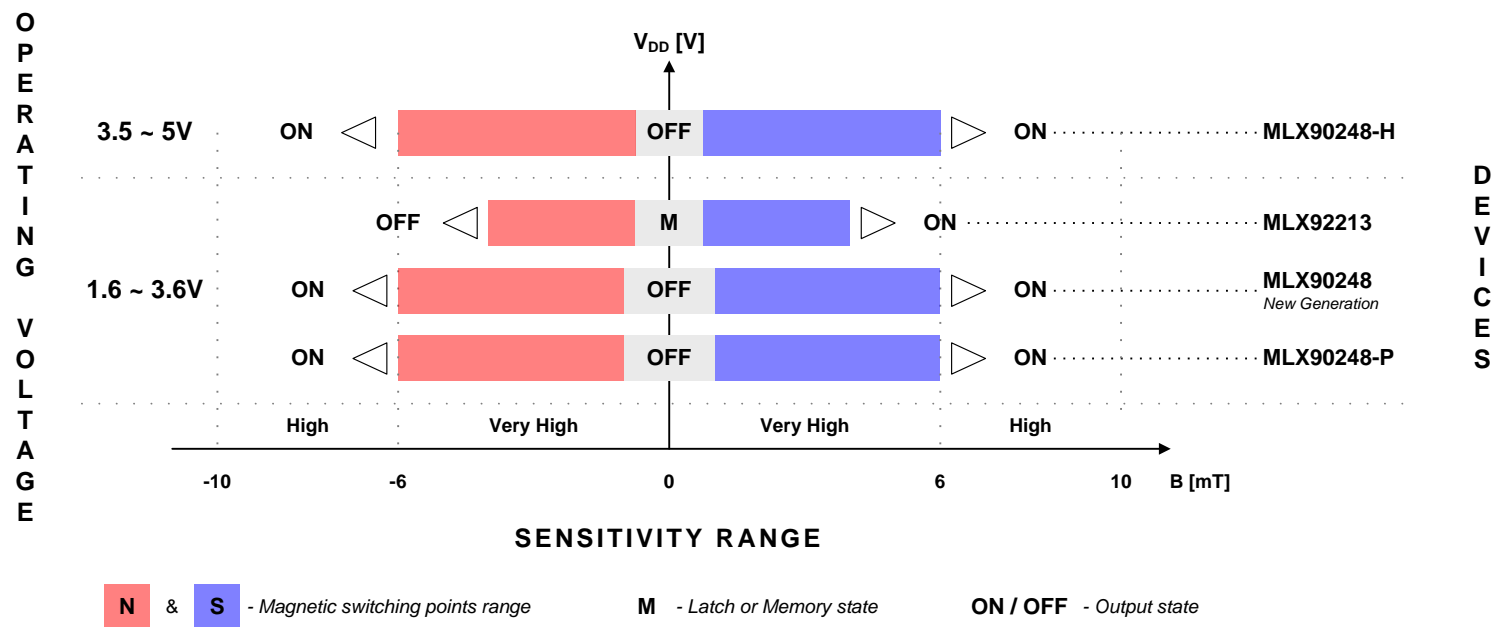

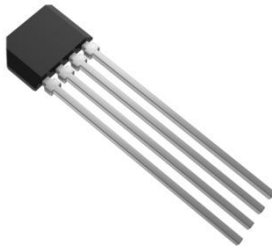





Figure 3. Low Power / Energy-Saving Latch & Switch Graph Selector by Operating Voltage and Magnetic Sensitivity

Table 4. Package pictures

	Visual Appearance		Green Compliance
Through-Hole Package	 <p>UA Package TO92-3L flat</p>	 <p>VA Package Thin TO92-4L flat</p>	✓
Surface Mount Package	 <p>SE Package TSOT-3L</p>	 <p>SE Package TSOT-5L</p>	✓
Chip Size package	 <p>LD Package UTQFN-6L</p>		✓

For more information concerning environmental compliance (RoHS, Green, Halogen Free,...), please consult www.melexis.com/Environmental.aspx



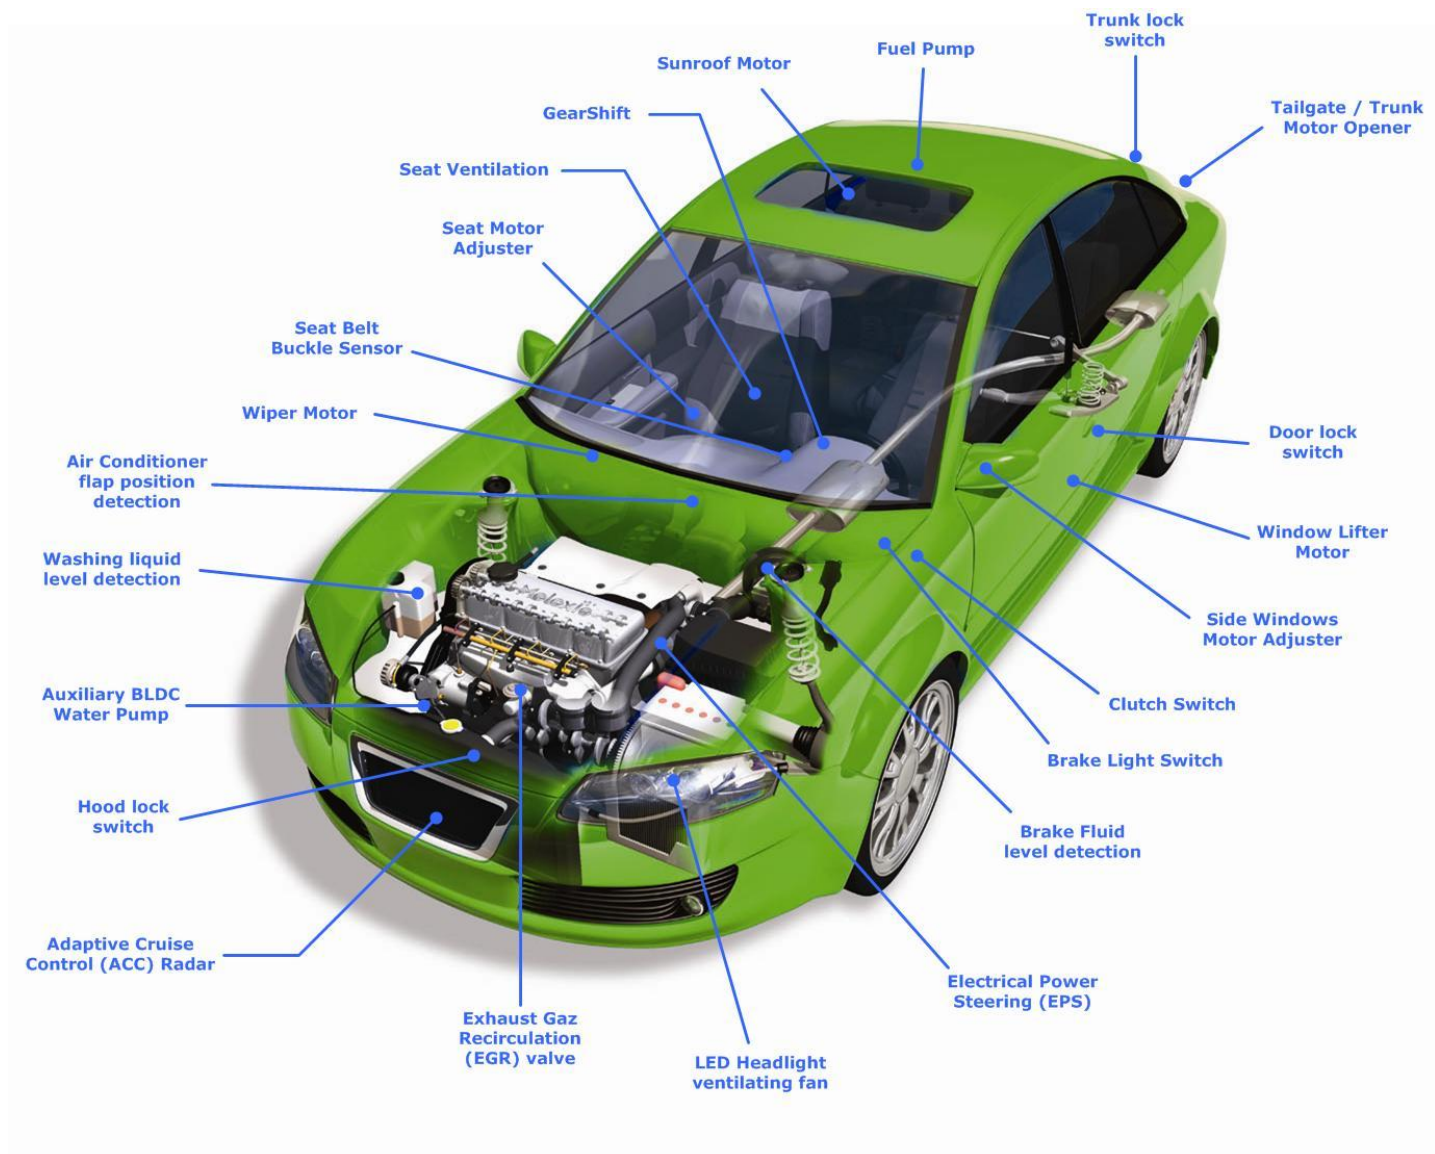


Figure 4. Hall-Effect Latch & Switch Automotive Application Examples

Disclaimer

- 1) The information included in this documentation is subject to Melexis intellectual and other property rights. Reproduction of information is permissible only if the information will not be altered and is accompanied by all associated conditions, limitations and notices.
- 2) Any use of the documentation without the prior written consent of Melexis other than the one set forth in clause 1 is an unfair and deceptive business practice. Melexis is not responsible or liable for such altered documentation.
- 3) The information furnished by Melexis in this documentation is provided 'as is'. Except as expressly warranted in any other applicable license agreement, Melexis disclaims all warranties either express, implied, statutory or otherwise including but not limited to the merchantability, fitness for a particular purpose, title and non-infringement with regard to the content of this documentation.
- 4) Notwithstanding the fact that Melexis endeavors to take care of the concept and content of this documentation, it may include technical or factual inaccuracies or typographical errors. Melexis disclaims any responsibility in connection herewith.
- 5) Melexis reserves the right to change the documentation, the specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with Melexis for current information.
- 6) Melexis shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interrupt of business or indirect, special incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the information in this documentation.
- 7) The product described in this documentation is intended for use in normal commercial applications. Applications requiring operation beyond ranges specified in this documentation, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional processing by Melexis for each application.
- 8) Any supply of products by Melexis will be governed by the Melexis Terms of Sale, published on www.melexis.com.

© Melexis NV. All rights reserved.

For the latest version of this document, go to our website at
www.melexis.com
or for additional information contact Melexis Direct:

Europe, Africa:
Phone: +32 1367 0495
E-mail: sales_europe@melexis.com

USA:
Phone: +1 603 223 2362
E-mail: sales_usa@melexis.com

Asia:
Phone: +32 1367 0495
Email: sales_asia@melexis.com

ISO/TS 16949 and ISO14001 Certified