

Ø14.20REF

PI

2

1

CONNECTOR

OVERMOLD

CABLE

P2

98.90REF

MATE WITH 2834000 SERIES

WIRING DIAGRAM		
PI	WIRE COLOR	P2
PI-1	WHITE	-
PI-2	BLACK	-

NOTES:

1.MATE WITH 2834000 SERIES.

2.RATINGS:

VOLTAGE:300V AC/DC

CURRENT:7A MAX.

TEMPERATURE:80°C

P/N	CABLE	DIM A	L (mm)
9-2834001-1	RUBBER (THERMOPLASTIC ELASTOMER TYPE)	Ø7.6	150±5
9-2834001-2			250±10
9-2834001-3			500±15
9-2834001-4			1000±15

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC±1.0

1 PLC±0.5

2 PLC±0.5

3 PLC±0.3

4 PLC±

ANGLES±

FINISH

DWN

SHI MING

10SEP2014

CHK

SHI MING

10SEP2014

APVD

XU XIANG

10SEP2014

PRODUCT SPEC

108-137041

APPLICATION SPEC

114-137041

WEIGHT

-

Customer Drawing

TE Connectivity

2P FEMALE CABLE ASSEMBLY  
CIRCULAR LIGHTING SEALED CONN.

-

SIZE

A2

CAGE CODE

-

DRAWING NO

©2834001

RESTRICTED TO

-

SCALE

NTS

SHEET

1

OF

2

REV



B1

1471-9 (3/11)

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
-	-	SEE SHEET 1			-	-	-	

1. PUT PIECES OF PARTS INTO THE PLASTIC BAG, AND SEALED WITH RUBBER BAND AS 1 BUNCH.


3. SEAL THE CARTON.

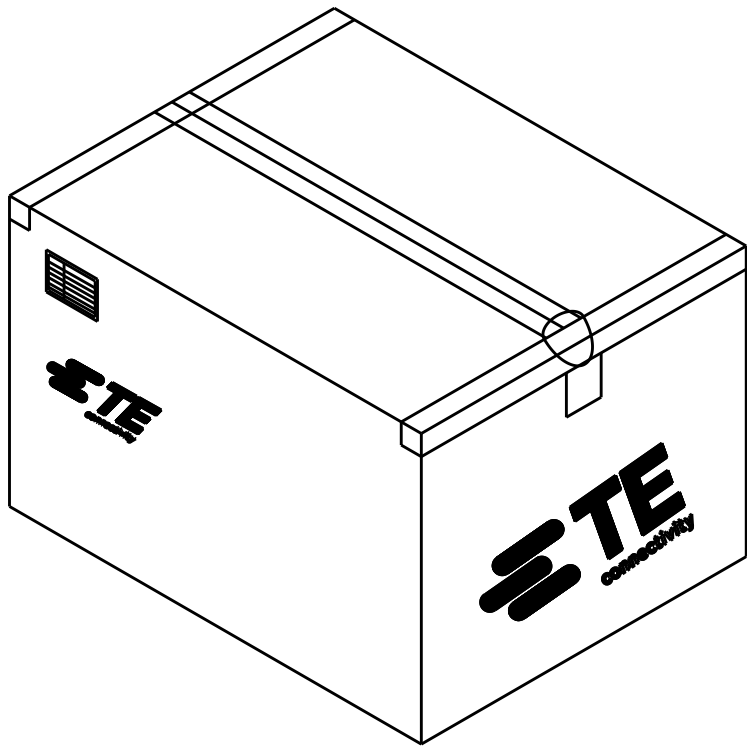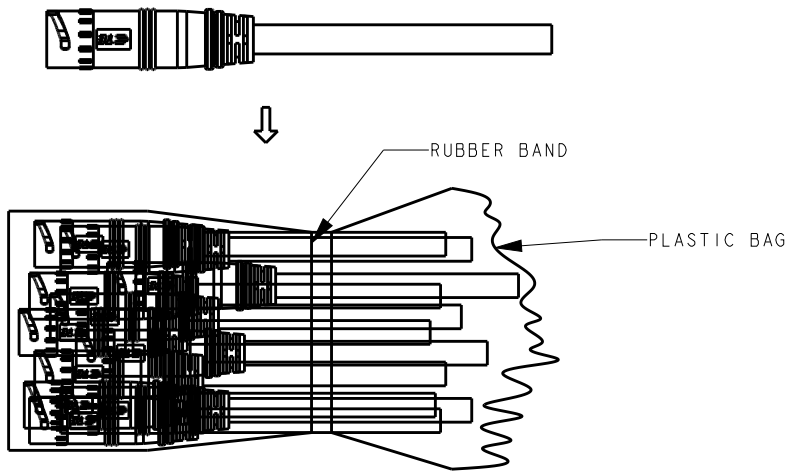

2. PUT BUNCHES OF PARTS INTO CARTON.

4. PACKAGING QUANTITIES(REFER TO SHEET 1 FOR PN DEFINITION):

P/N	PARTS PER CARTON (PCS)
9-2834001-1	500
9-2834001-2	260
9-2834001-3	90
9-2834001-4	60

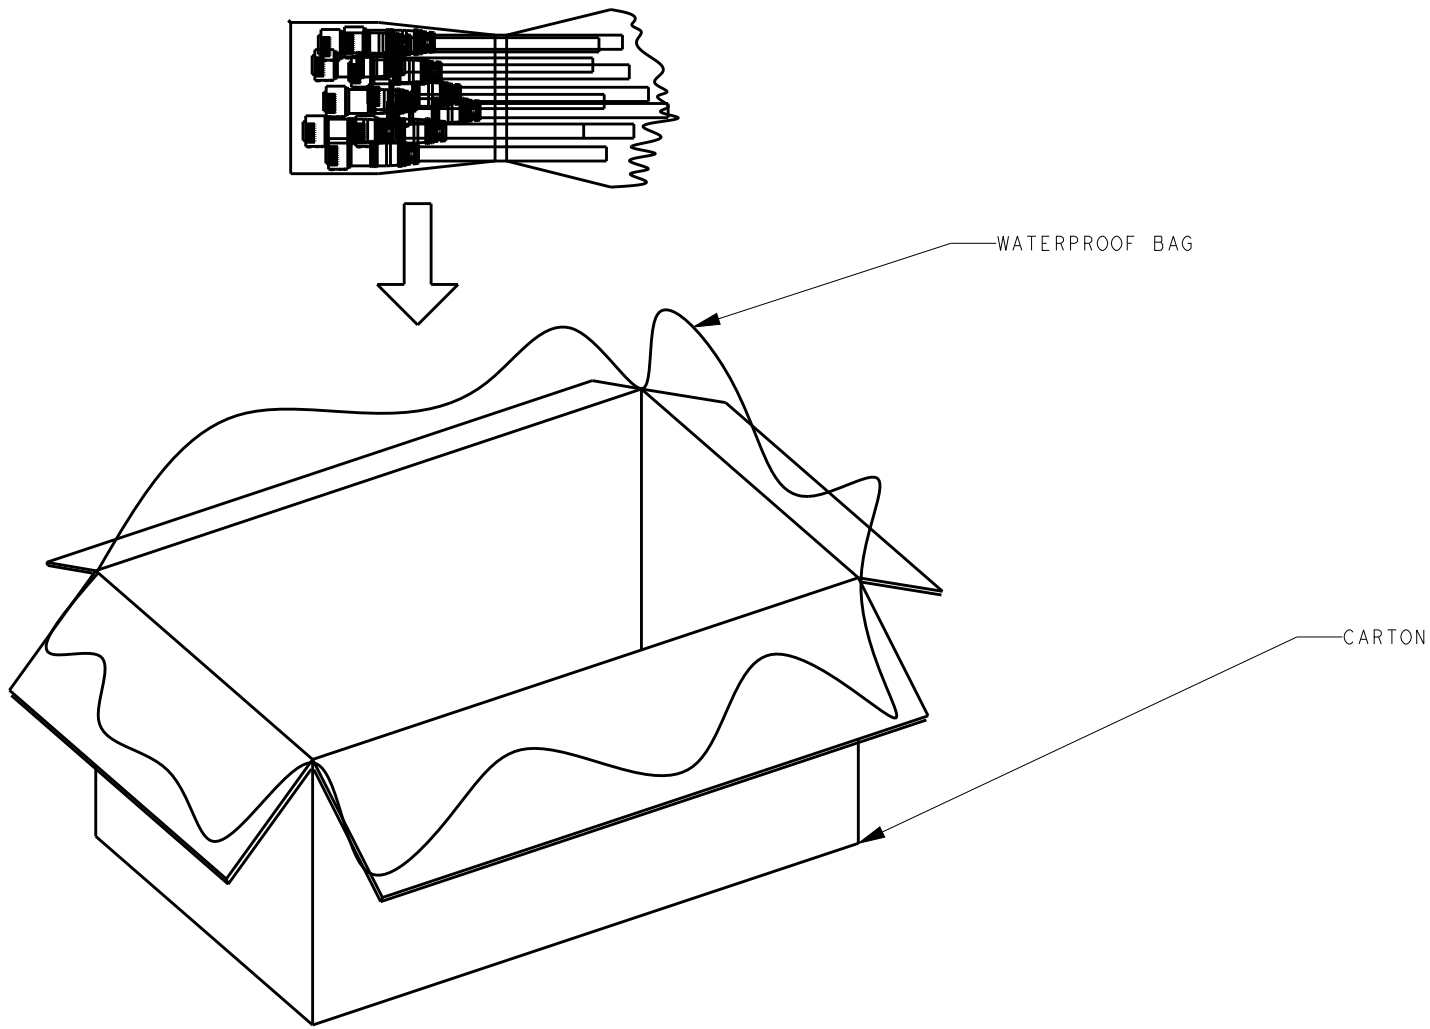

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN SHI MING 10SEP2014	TE Connectivity			
DIMENSIONS: mm		CHK SHI MING 10SEP2014				
		APVD XU XIANG 10SEP2014	NAME 2P FEMALE CABLE ASSEMBLY CIRCULAR LIGHTING SEALED CONN.			
		PRODUCT SPEC 108-137041	-			
MATERIAL -		APPLICATION SPEC 114-137041	SIZE A2	CAGE CODE -	DRAWING NO. C-2834001	RESTRICTED TO -
WEIGHT -			Customer Drawing			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±1.0 2 PLC ±0.5 3 PLC ±0.3 4 PLC ± ANGLES ± FINISH			SCALE NTS SHEET 2 OF 2 REV B1			