
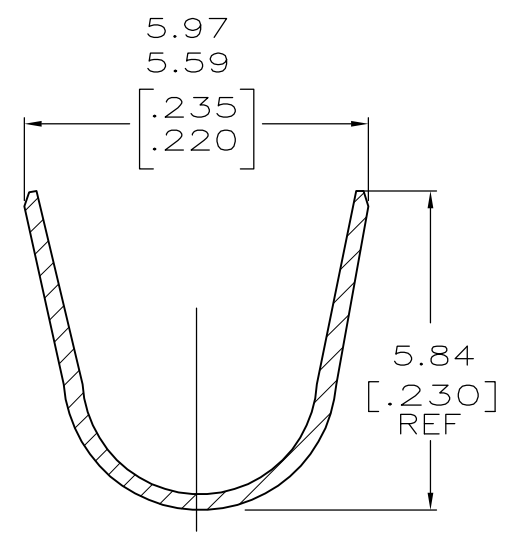
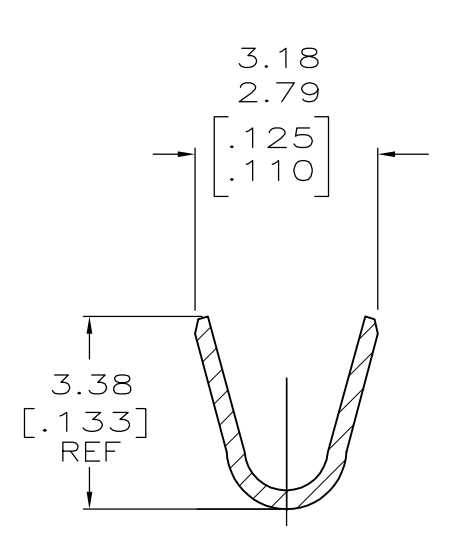
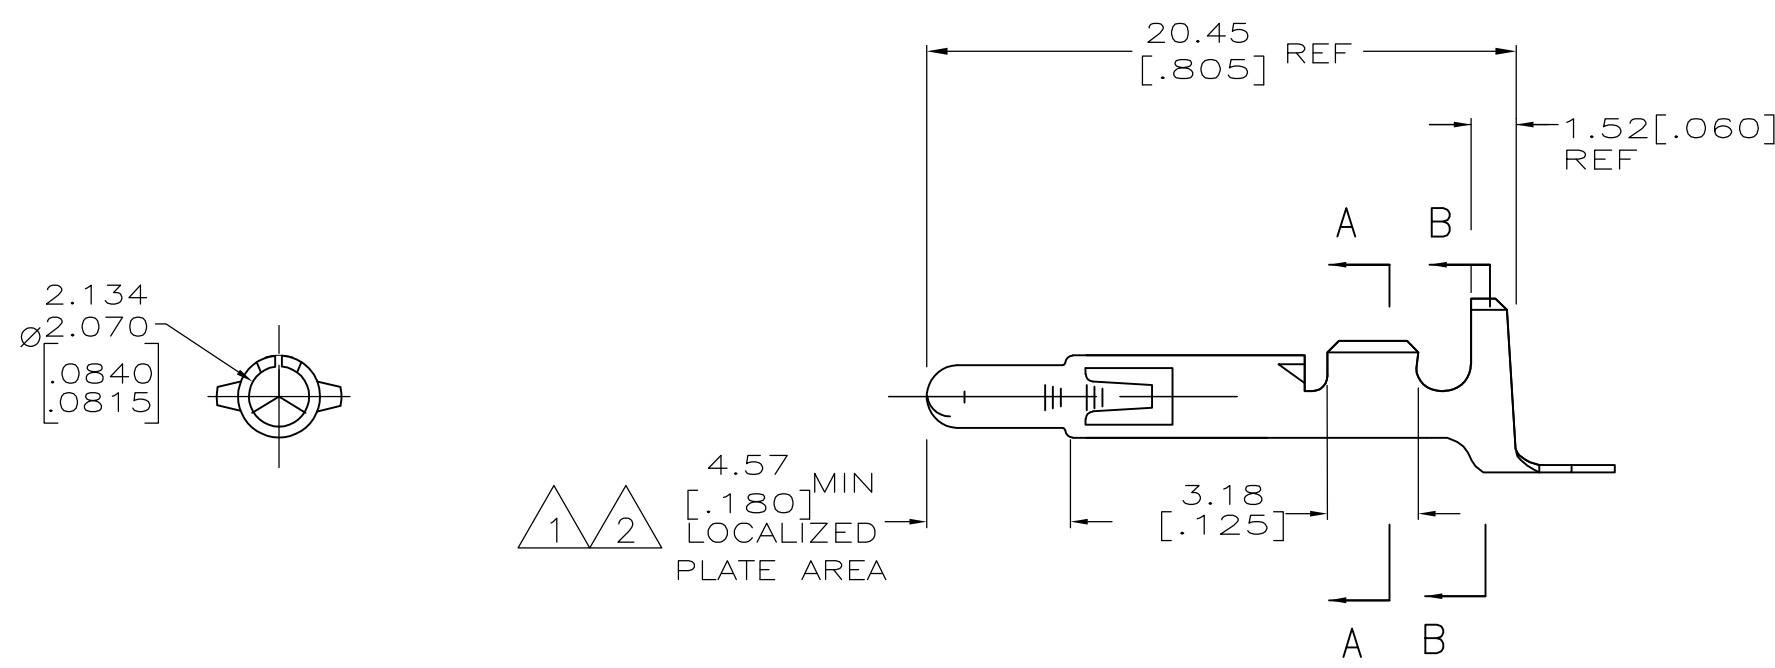


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
CM	00		AB	REVISED PER ECR-12-013323	09AUG12	KH	TM

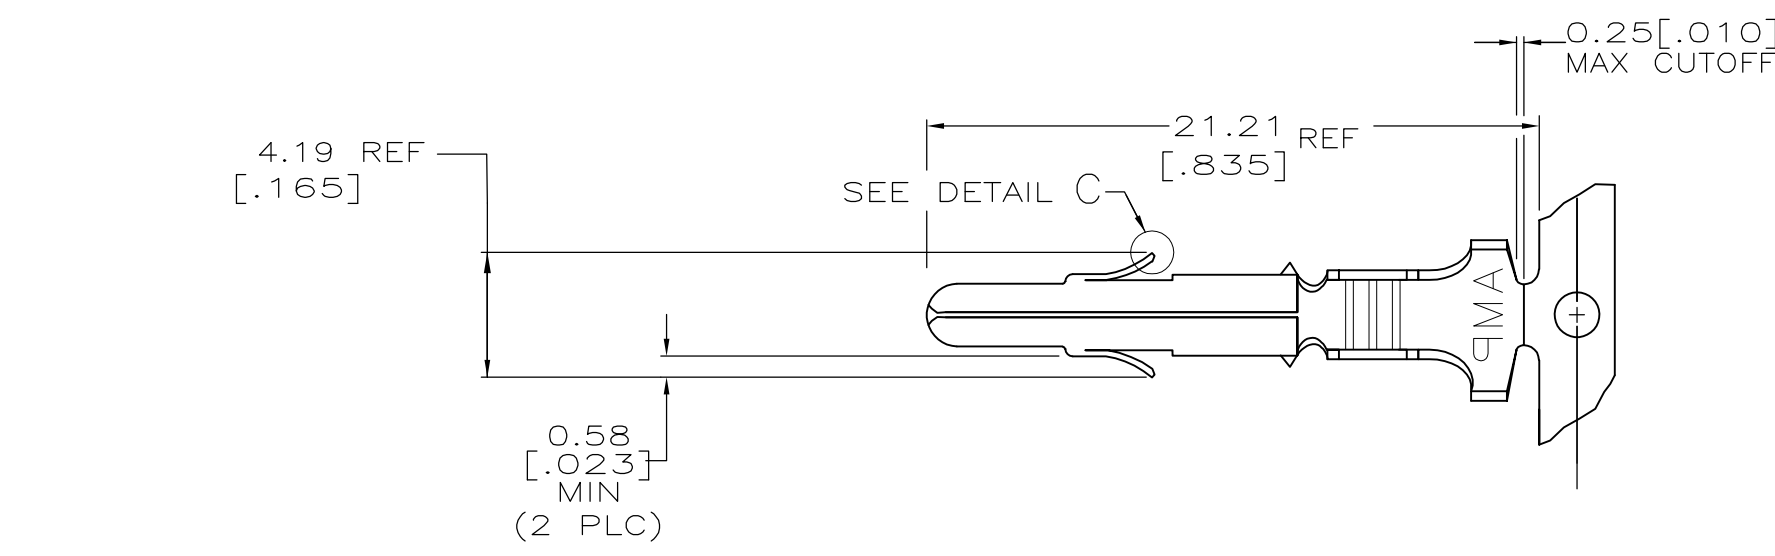


- 1

0.00076[.000030] MIN THK GOLD IN LOCALIZED PLATE AREA AND 0.000127[.000005] MIN THK GOLD FLASH ON REMAINDER OF CONTACT OVER 0.00127[.000050] MIN THK NICKEL UNDERPLATE.
- 2

0.00076[.000030] MIN THK GOLD IN LOCALIZED PLATE AREA OVER 0.00127[.000050] MIN THK NICKEL UNDERPLATE.
- 3

DIMENSIONS IN BRACKETS ARE IN INCHES.
- 4

WIRE RANGE: 20-14 AWG
INSULATION RANGE: 3.30-5.08 [.130-.200] DIA.

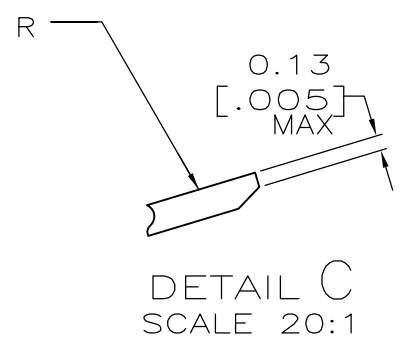

350552-7	GOLD	2	0.30 [.012] BRASS	350538-7
350552-6	GOLD	2	0.30 [.012] PH BZ	350538-6
350552-3	TIN		0.30 [.012] PH BZ	350538-3
350552-2	GOLD	1	0.30 [.012] BRASS	350538-2
350552-1	TIN		0.30 [.012] BRASS	350538-1
LOOSE PIECE (REF)	FINISH		MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
K. WHITAKER
16-FEB-04

CHK
S. RIDGILL
16-FEB-04

APVD
S. RIDGILL
16-FEB-04

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	0.20.008
4 PLC	±	-
ANGLES	±	-

MATERIAL

SEE TABLE

NAME

PIN,
UNIVERSAL MATE-N-LOK™

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A2

00779

C=350538

-

SCALE

SHEET

REV

4:1

1 OF 1

AB