



**NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED**



**THIS PAGE INTENTIONALLY LEFT BLANK**



### Typical Applications

Prescaler for DC to C Band PLL Applications:

- UNII, Point-to-Point & VSAT Radios
- 802.11a & HiperLAN WLAN
- Fiber Optic
- Cellular / 3G Infrastructure

### Features

SSB Phase Noise: -153 dBc/Hz @100 kHz


Wide Bandwidth

Output Power: -1 dBm

Single DC Supply: +5V @ 80 mA

MS8G SMT Package

### Functional Diagram

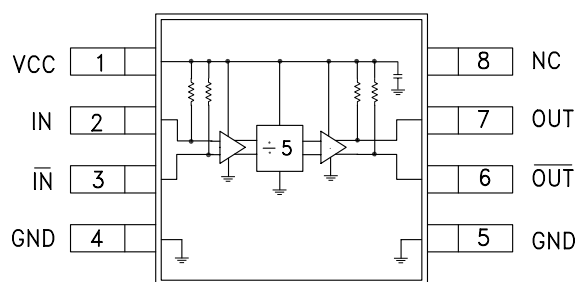

### General Description

The HMC438MS8G & HMC438MS8GE are low noise Divide-by-5 Static Dividers utilizing InGaP GaAs HBT technology in low cost 8 lead surface mount plastic packages. This device operates from DC (with a square wave input) to 7 GHz input frequency from a single +5V DC supply. The low additive SSB phase noise of -153 dBc/Hz at 100 kHz offset helps the user maintain good system noise performance.

### Electrical Specifications, $T_A = +25^\circ\text{C}$ , 50 Ohm System, $V_{CC} = 5V$

| Parameter                        | Conditions                            | Min. | Typ. | Max. | Units  |
|----------------------------------|---------------------------------------|------|------|------|--------|
| Maximum Input Frequency          |                                       | 7.0  | 7.5  |      | GHz    |
| Minimum Input Frequency          | Sine Wave Input [1]                   |      | 0.1  |      | GHz    |
| Input Power Range                | $F_{in} = 1$ to 5 GHz                 | -15  |      | +12  | dBm    |
|                                  | $F_{in} = 5$ to 6 GHz                 | -15  |      | +10  | dBm    |
|                                  | $F_{in} = 6$ to 7 GHz                 | -15  |      | +5   | dBm    |
| Output Power                     |                                       | -4   | -1   |      | dBm    |
| Reverse Leakage                  | Both RF Outputs Terminated            |      | -50  |      | dBm    |
| SSB Phase Noise (100 kHz offset) | $P_{in} = 0$ dBm, $F_{in} = 6$ GHz    |      | -153 |      | dBc/Hz |
| Output Transition Time           | $P_{in} = 0$ dBm, $F_{out} = 882$ MHz |      | 100  |      | ps     |
| Supply Current ( $I_{CC}$ )      |                                       |      | 80   |      | mA     |


1. Divider will operate down to DC for square-wave input signal.

For price, delivery and to place orders: Hittite Microwave Corporation, 20 Alpha Road, Chelmsford, MA 01824


Phone: 978-250-3343 Fax: 978-250-3373 Order On-line at [www.hittite.com](http://www.hittite.com)

Application Support: Phone: 978-250-3343 or [apps@hittite.com](mailto:apps@hittite.com)


**Input Sensitivity Window,  $T = 25^\circ\text{C}$**

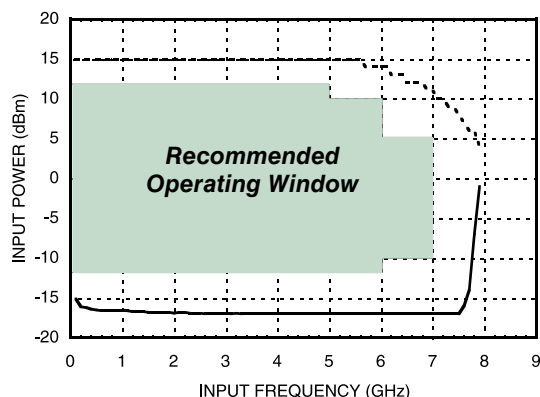


**Input Sensitivity Window vs. Temperature**

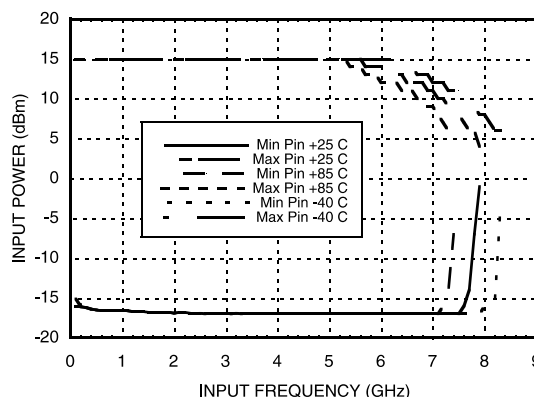


**Output Power vs. Temperature**

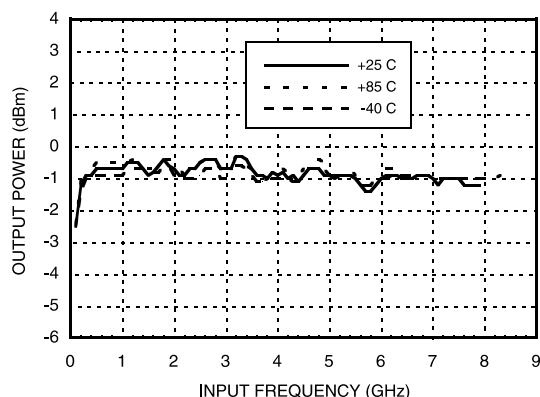


**SSB Phase Noise Performance,  $P_{in} = 0\text{ dBm}$ ,  $F_{in} = 6\text{ GHz}$ ,  $T = 25^\circ\text{C}$**

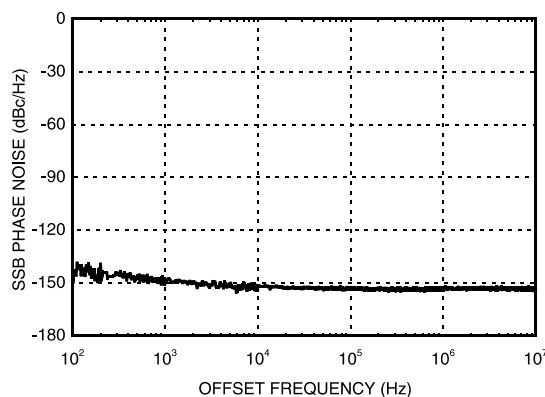

**Output Harmonic Content,  $P_{in} = 0\text{ dBm}$ ,  $T = 25^\circ\text{C}$**

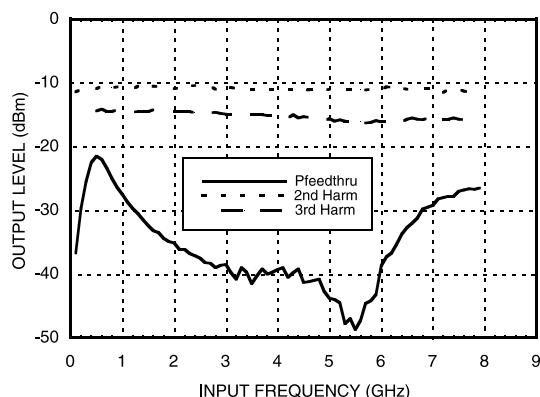


**Reverse Leakage,  $P_{in} = 0\text{ dBm}$ ,  $T = 25^\circ\text{C}$**

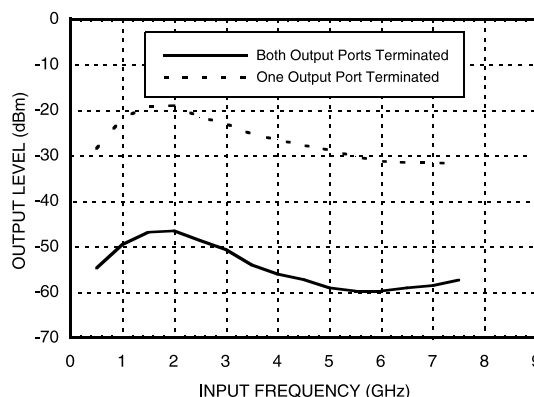



**Output Voltage Waveform,**  
 **$P_{in} = 0\text{ dBm}$ ,  $F_{out} = 882\text{ MHz}$ ,  $T = 25\text{ }^{\circ}\text{C}$**

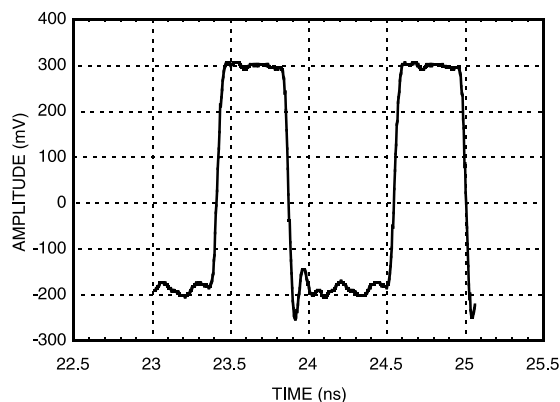

### Absolute Maximum Ratings

|  |                                |
|--|--------------------------------|
| RF Input Power ( $V_{cc} = +5\text{V}$ ) | 13 dBm                         |
| Nominal +5V Supply to GND                | -0.3V to +5.5V                 |
| Max Peak Flow Temperature                | 260 $^{\circ}\text{C}$         |
| Storage Temperature                      | -65 to +125 $^{\circ}\text{C}$ |
| ESD Sensitivity (HBM)                    | Class 1A                       |

### Reliability Information

|  |                               |
|--|-------------------------------|
| Junction Temperature to Maintain<br>1 Million Hour MTTF              | 135 $^{\circ}\text{C}$        |
| Nominal Junction Temperature<br>( $T = 85\text{ }^{\circ}\text{C}$ ) | 122 $^{\circ}\text{C}$        |
| Thermal Resistance<br>(Junction to GND Paddle, 5V Supply)            | 88.5 $^{\circ}\text{C/W}$     |
| Operating Temperature  | -40 to +85 $^{\circ}\text{C}$ |

DC blocking capacitors are required at RF input and RF output ports.  
 Choose value for lowest frequency of operation.




**ELECTROSTATIC SENSITIVE DEVICE**  
**OBSERVE HANDLING PRECAUTIONS**

### Typical Supply Current vs. $V_{cc}$

| $V_{cc}$ (V) | $I_{cc}$ (mA) |
|--------------|---------------|
| 4.75         | 75            |
| 5.0          | 80            |
| 5.25         | 87            |

Note: Divider will operate over full voltage range shown above

### Outline Drawing

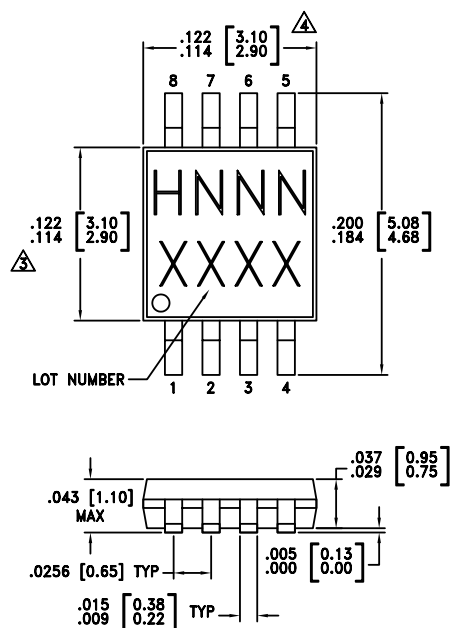

#### NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
4. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
5. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND.

### Package Information

| Part Number | Package Body Material                              | Lead Finish   | MSL Rating          | Package Marking <sup>[3]</sup> |
|-------------|--|---------------|---------------------|--------------------------------|
| HMC438MS8G  | Low Stress Injection Molded Plastic                | Sn/Pb Solder  | MSL1 <sup>[1]</sup> | H438<br>XXXX                   |
| HMC438MS8GE | RoHS-compliant Low Stress Injection Molded Plastic | 100% matte Sn | MSL1 <sup>[2]</sup> | H438<br>XXXX                   |

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX


### Pin Description

| Pin Number | Function | Description                  | Interface Schematic |
|------------|----------|------------------------------|---------------------|
| 1          | Vcc      | Supply voltage 5V ± 0.25V.   |                     |
| 2          | IN       | RF input must be DC blocked. |                     |


### Pin Description (Continued)

| Pin Number | Function                | Description  | Interface Schematic |
|------------|-------------------------|--|---------------------|
| 3          | $\overline{\text{IN}}$  | RF input 180° out of phase with pin 2 for differential operation. AC ground for single ended operation.                                  |                     |
| 4, 5       | GND                     | All ground leads and ground paddle must be soldered to PCB RF/DC ground.   |                     |
| 6          | $\overline{\text{OUT}}$ | Divided output 180° out of phase with pin 7.   |                     |
| 7          | OUT                     | Divided Output.  |                     |
| 8          | N/C                     | The pins are not connected internally; however, all data shown herein was measured with these pins connected to RF/DC ground externally. |                     |

### Application Circuit

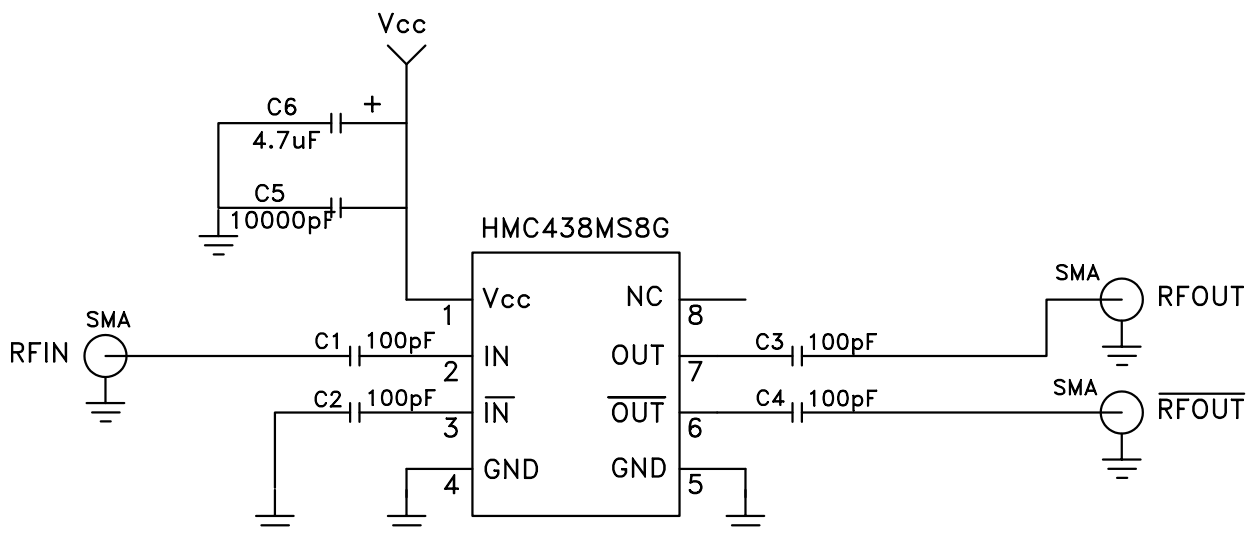

### Evaluation PCB

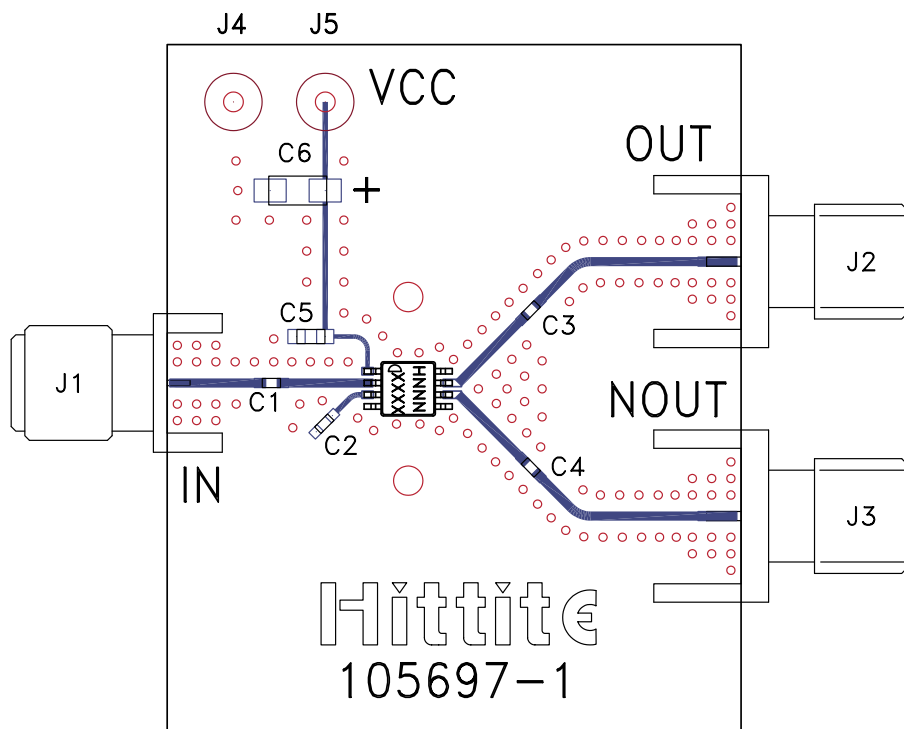

### List of Materials for Evaluation PCB 105786 [1]

| Item    | Description                          |
|---------|--------------------------------------|
| J1 - J3 | PCB Mount SMA RF Connector           |
| J4, J5  | DC Pin                               |
| C1 - C4 | 100 pF Capacitor, 0402 Pkg.          |
| C5      | 10,000 pF Capacitor, 0603 Pkg.       |
| C6      | 4.7 $\mu$ F Tantalum Capacitor       |
| U1      | HMC438MS8G / HMC438MS8GE Divide-by-5 |
| PCB [2] | 105697 Eval Board                    |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and backside ground slug should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation circuit board shown is available from Hittite upon request. This evaluation board is designed for single ended input testing. J2 and J3 provide differential output signals.