



Current Sense / Low Frequency Transformers

CSE185L

Description:

Triad's low frequency current sense transformers are designed to monitor current from **0.1 to 3 ampere at frequencies from 50 Hz to 400 Hz.**

Electrical Specifications at 25° C:

Turns ratio: Primary to sense 1: 50

Suggested burden resistor: 60Ω

Typical output: **110mV/Amp**

Primary DCR: 19.5 mΩ maximum

Sense DCR: 23 Ω maximum

Operating Temperature: -30°C to 95°C

Storage Temperature: -50°C to 125°C

Maximum input: **3Arms**, 0-240VAC circuit

Maximum output voltage: **4.0Vrms. Burden resistor value must be selected to not exceed this voltage.**

Response Curve:

Construction:





These transformers are provided with Recognized Component electrical insulation system (OBJY2), Class 130 (B), designated "B3". Products are designed, built and 100% tested for a hi-pot of 2500V, winding to winding and 1250V, winding to core.

Agency Files:


UL file E50476 – Electrical Insulation Systems, Class "B3", 130C

RoHS Compliance: As of manufacturing date February 2005, all standard products meet the requirements of 2011/65/EU, known as the RoHS initiative.

*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

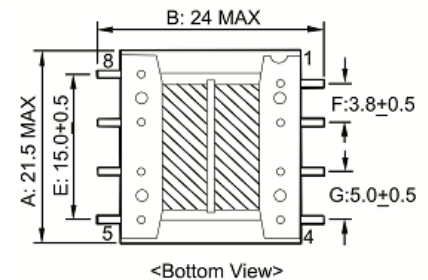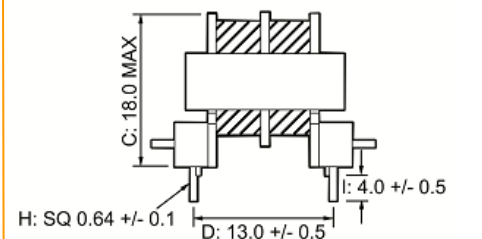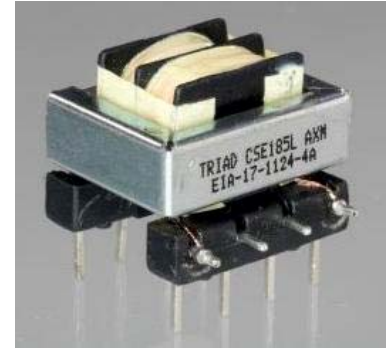

PC BOARD
LAYOUT

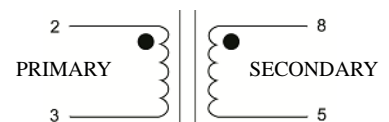

SCHEMATIC

web: www.TriadMagnetics.com
Phone 951-277-0757
Fax 951-277-2757

460 Harley Knox Blvd.
Perris, California 92571

Publish Date: December 4, 2013