



NOTES:

1. SEE SHEET 2 FOR PRODUCT DESCRIPTIONS AND TECHNICAL SPECIFICATIONS.
2. SEE CURRENT CATALOG FOR PATCH CORD LENGTHS AND PACKAGE QUANTITIES.
3. FOR LENGTHS OTHER THAN THOSE LISTED IN CATALOG, CONTACT YOUR PANDUIT SALES PERSON.
4. TESTED TO EIA/TIA 568-B.3.
5. PATCH CORD ROUTING CONFIGURATION A TO B.
6. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS, (EUROPEAN DIRECTIVE 2002/95/EC ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.

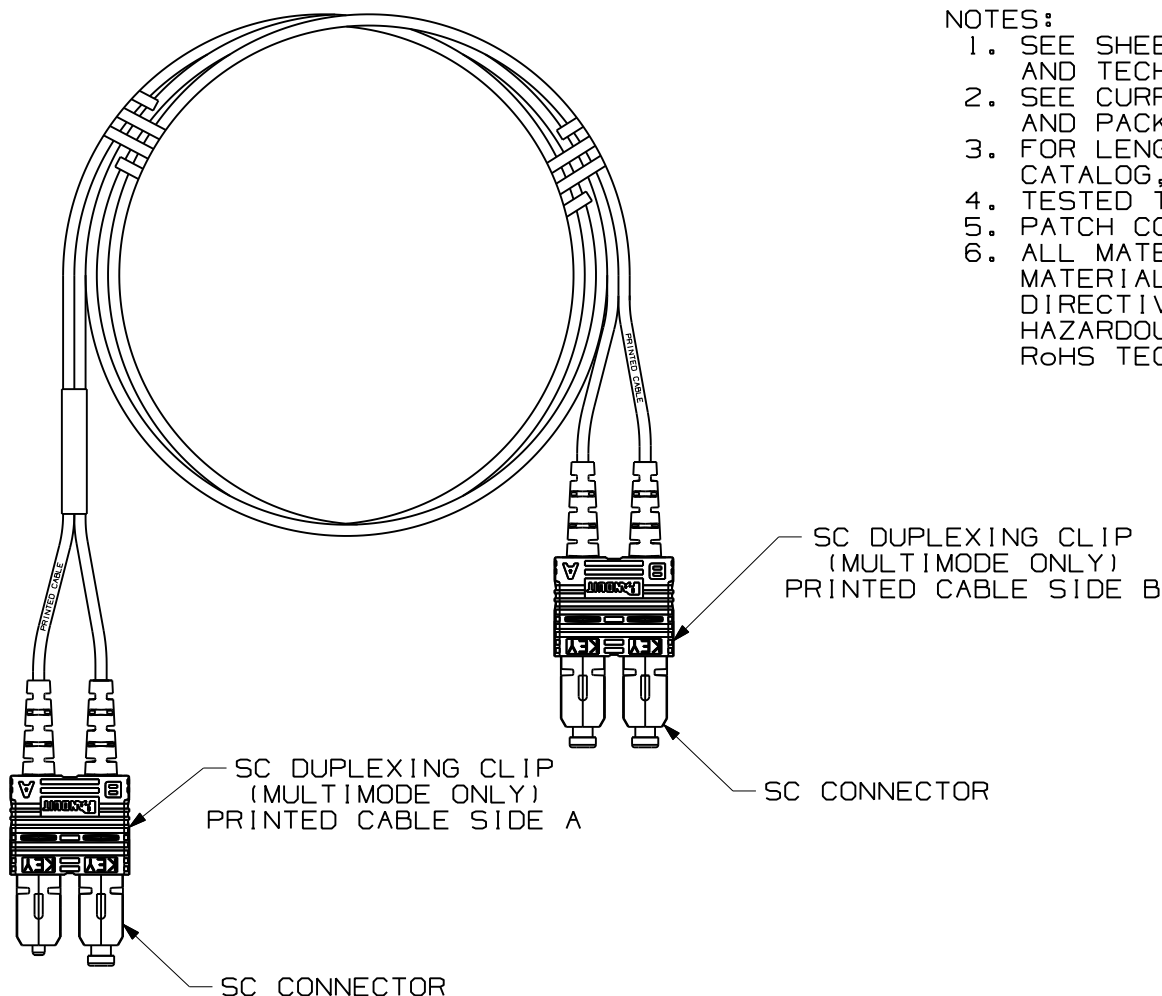

										NETKEY FIBER OPTIC PATCH CORD DUPLEX SC TO SC CONFIGURATION CUSTOMER DRAWING			
										 PANDUIT TM CORP. TINLEY PARK, ILL 60477			
										 THIRD ANGLE PROJECTION			
										ALL DIMENSIONS ARE GIVEN IN INCHES UNLESS OTHERWISE SPECIFIED. DIMENSIONAL TOLERANCES ARE: (.X) ±.03 (.XXX) ±.010 (.3) ±.005 (.XX) ±.03 (.8) ANGLES			
										DRAWING FILENAME M01302CS_DC/00A			
										SCALE NONE			
										PART NO. NK F•GRO2S-SM•• NK F•GLO2S-SM••			
										DRAWING NO. 01302-53			
										SHEET 1 OF 2			
										SIZE A			
R	12-14-09	EFK		RELEASED TO PRODUCTION	01302-53					DRAWN BY EFK DATE 12-14-09 CHK'D			
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP	OTH				

