
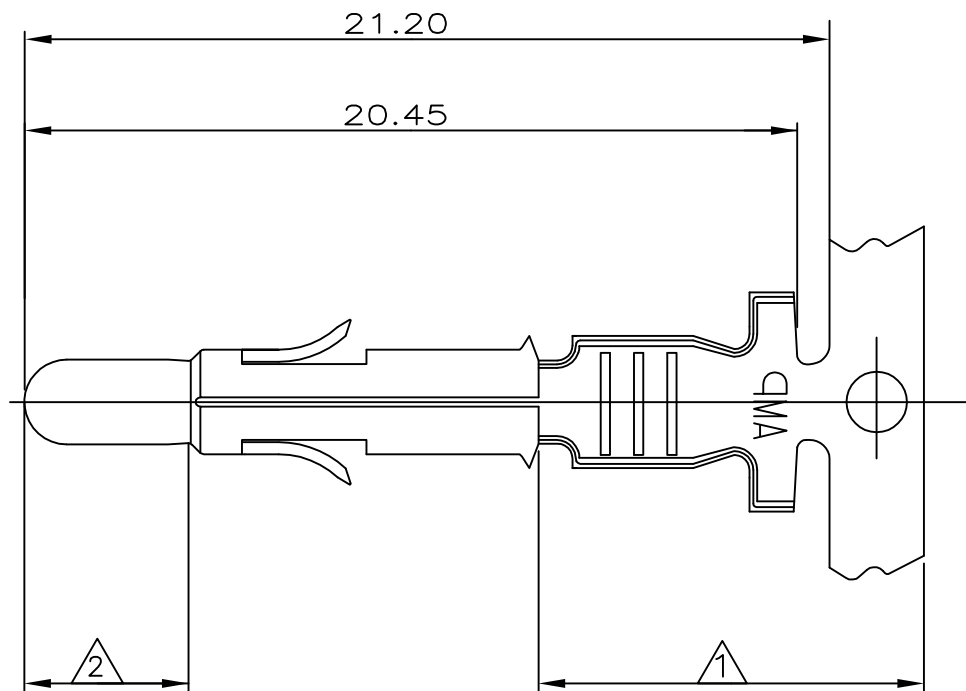
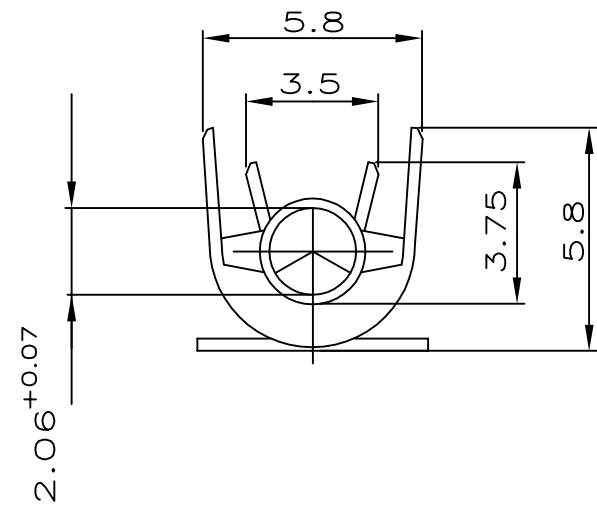


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	G2	REVISED PER ECR-17-013854	22SEP2017	BDA	KR

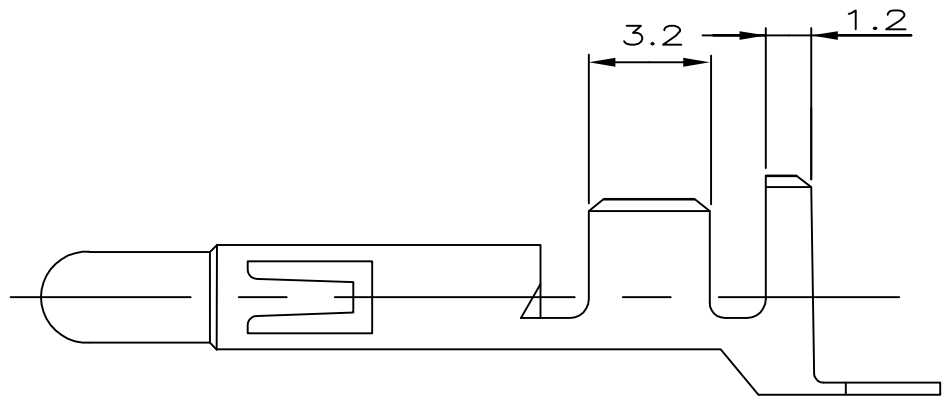

- 1

2-6 μm Sn über Ni in der Crimpzone
- 2

0.8 μ m Gold über Nickel in der kontaktzone
- 3

Für isolations Ø3.3-5.1 mm geeignet

	926900-7	926868-7	CuZn30 F53	1	2
	926900-6	926868-6	CuSn4 F56	1	2
OBSOLETE	926900-5	926868-5	CuCrZr F50	vorverzinnt	-
OBSOLETE	926900-4	926868-4	CuCrZr F50	blank	-
	926900-3	926868-3	CuSn4 F56	vorverzinnt	-
	926900-1	926868-1	CuZn30 F53	vorverzinnt	-
	LOOSE PIECE	Bestell-Nr	werkstoff	Oberfläche	Farbe

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	21OCT2013	TE Connectivity		
		CHK	21OCT2013			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± 0.20 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		NAME		
				Universal M-N-L Stift DGB 1.5-2.5mm ²		
		MATERIAL		SIZE	CAGE CODE	DRAWING NO
				A2	00779	C=926868
				RESTRICTED TO		
				-		
				CUSTOMER DRAWING		
				SCALE	1:1	SHEET 1 of 1
						REV G2