




LOC	DIST	REVISIONS					
		REV	LTR	DESCRIPTION	DATE	DWN	APVD
CM	53	V2		REVISED PER ECO-11-004587	11MAR11	RK	HMR

D

C


B

A

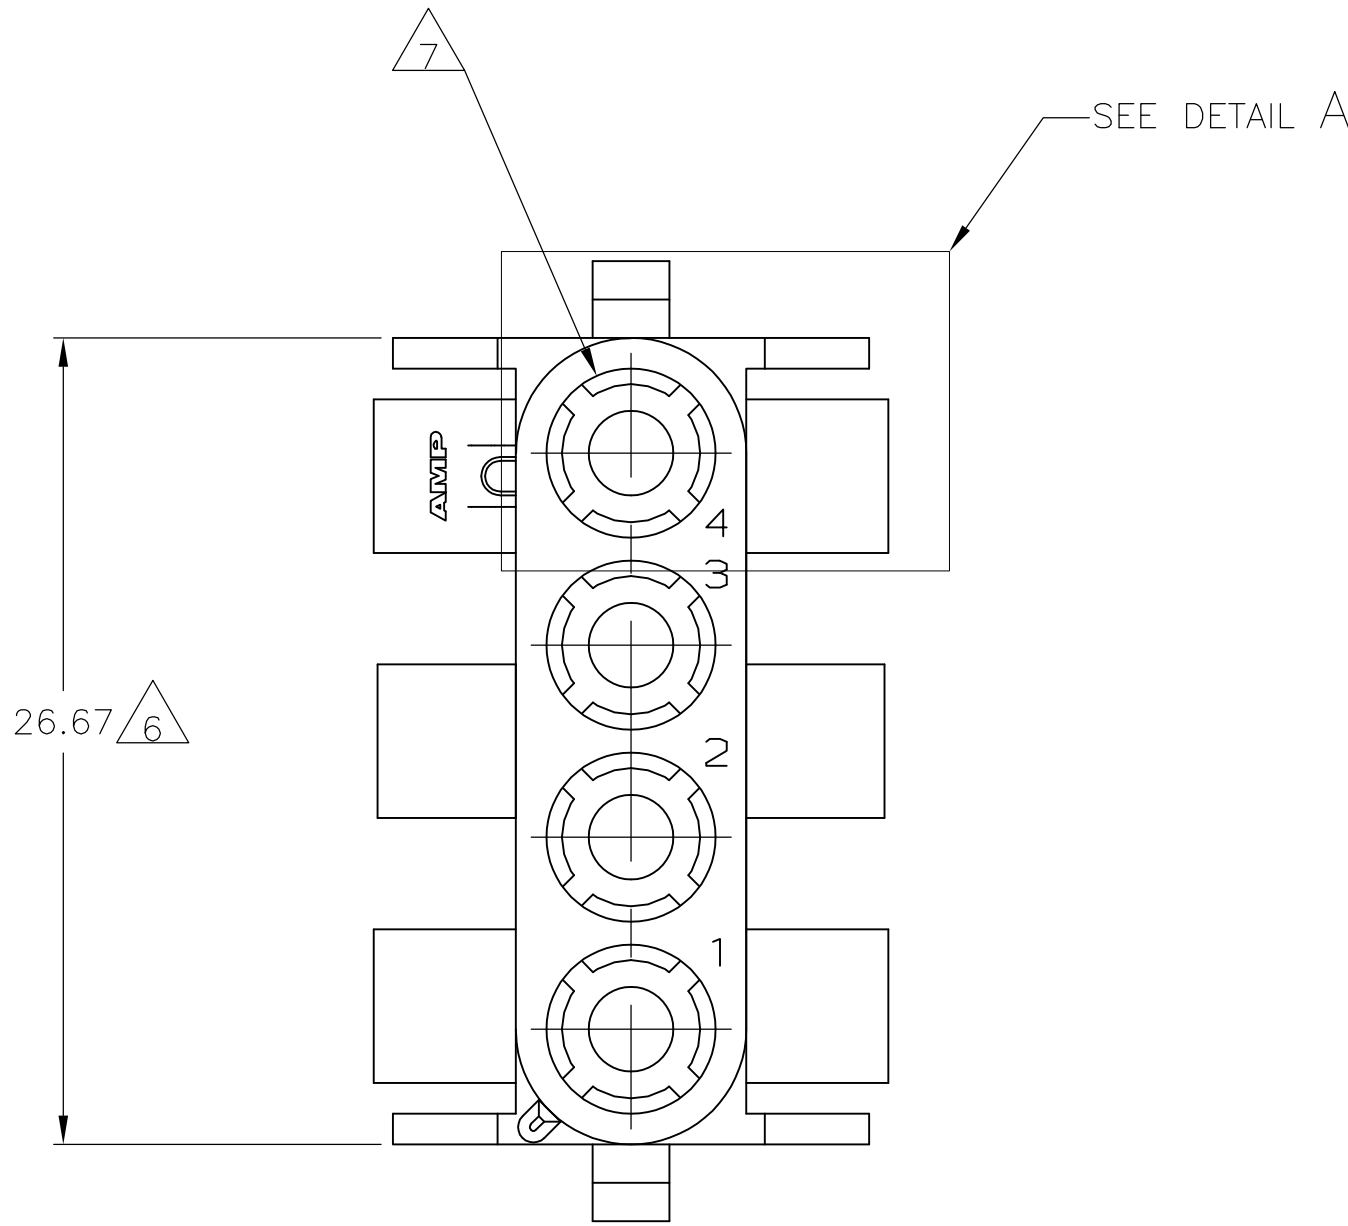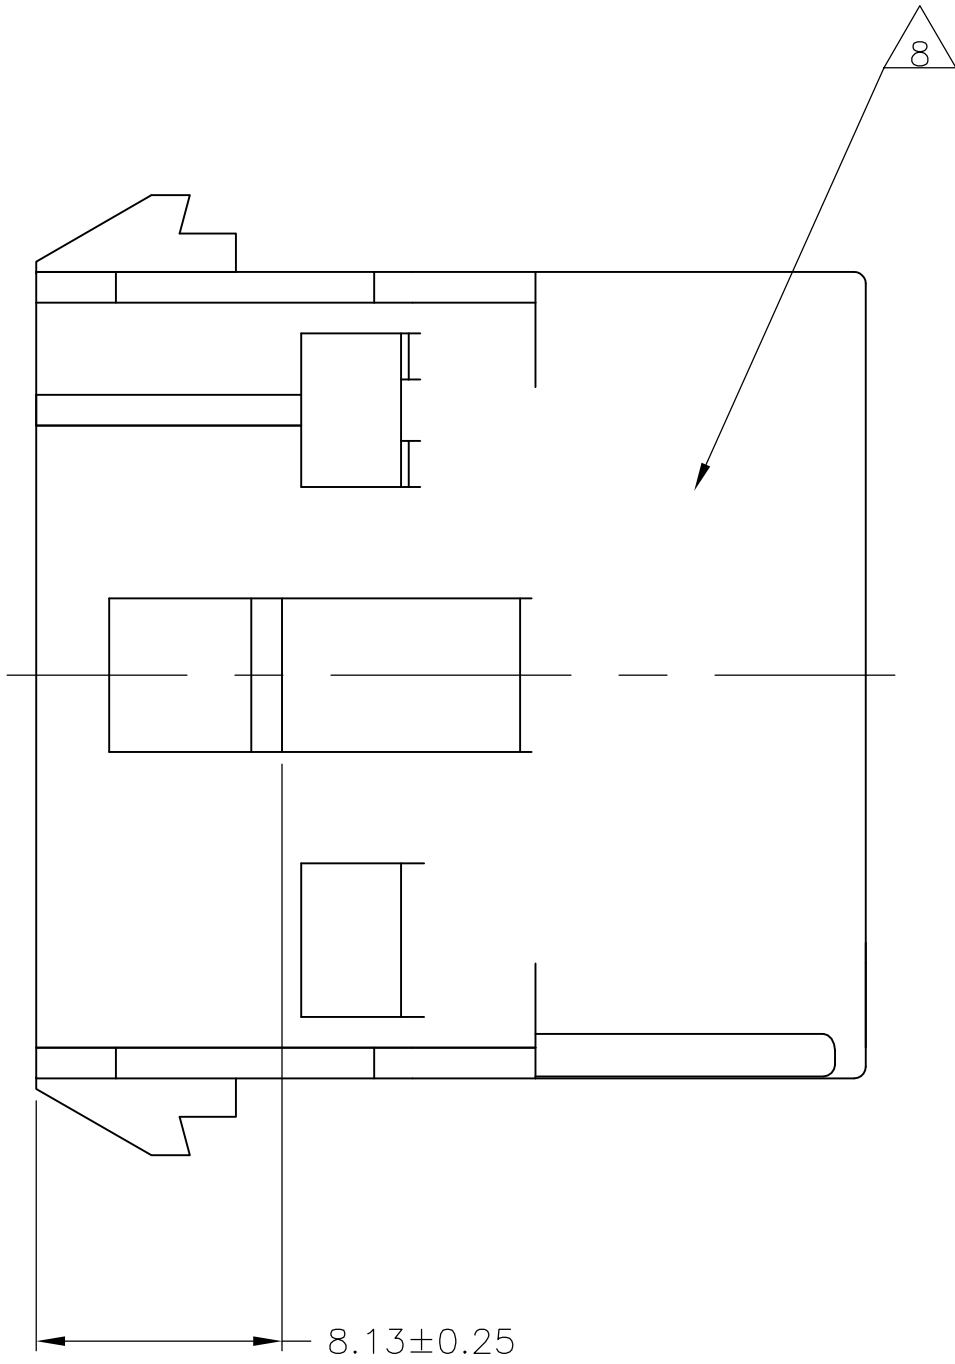
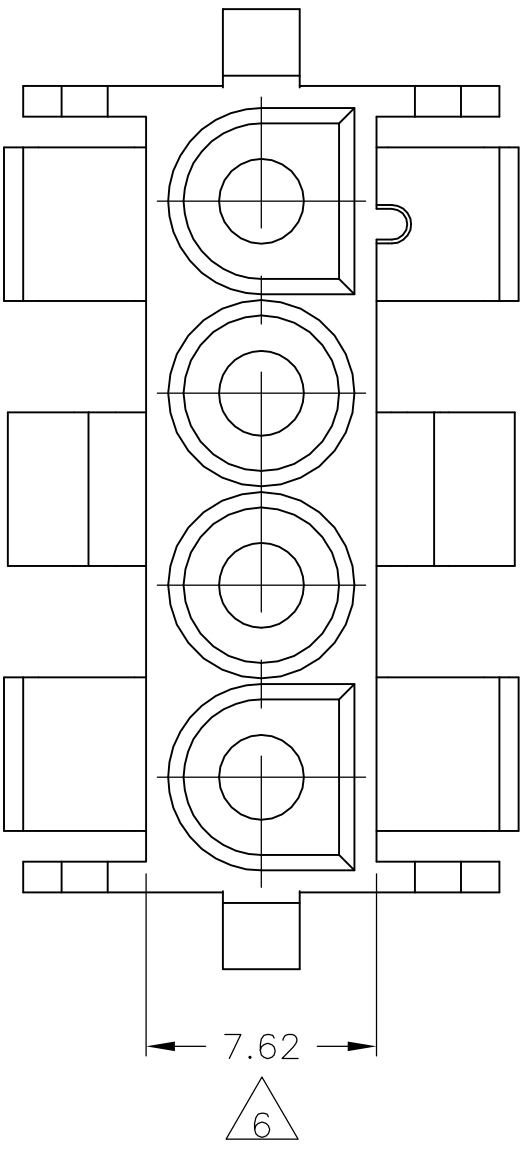


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 – 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.


- 4. OPTIONAL FOR KEYING HOUSING IN PANEL.
- 5. CIRCUIT NUMBER 1 LOCATION.
- 6. DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
- 7. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION. NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
- 8. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.

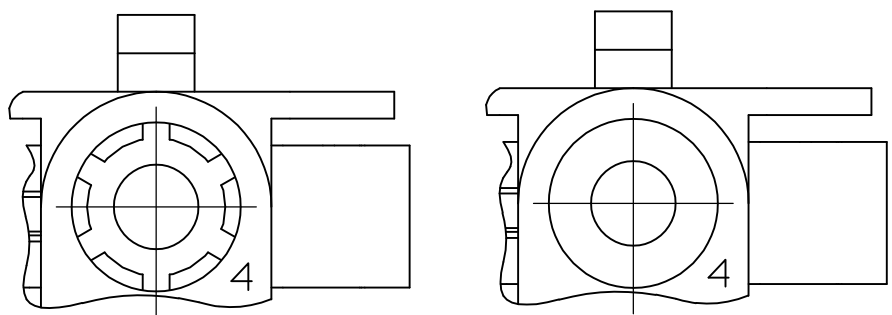

DETAIL A
OPTIONAL CONSTRUCTIONS

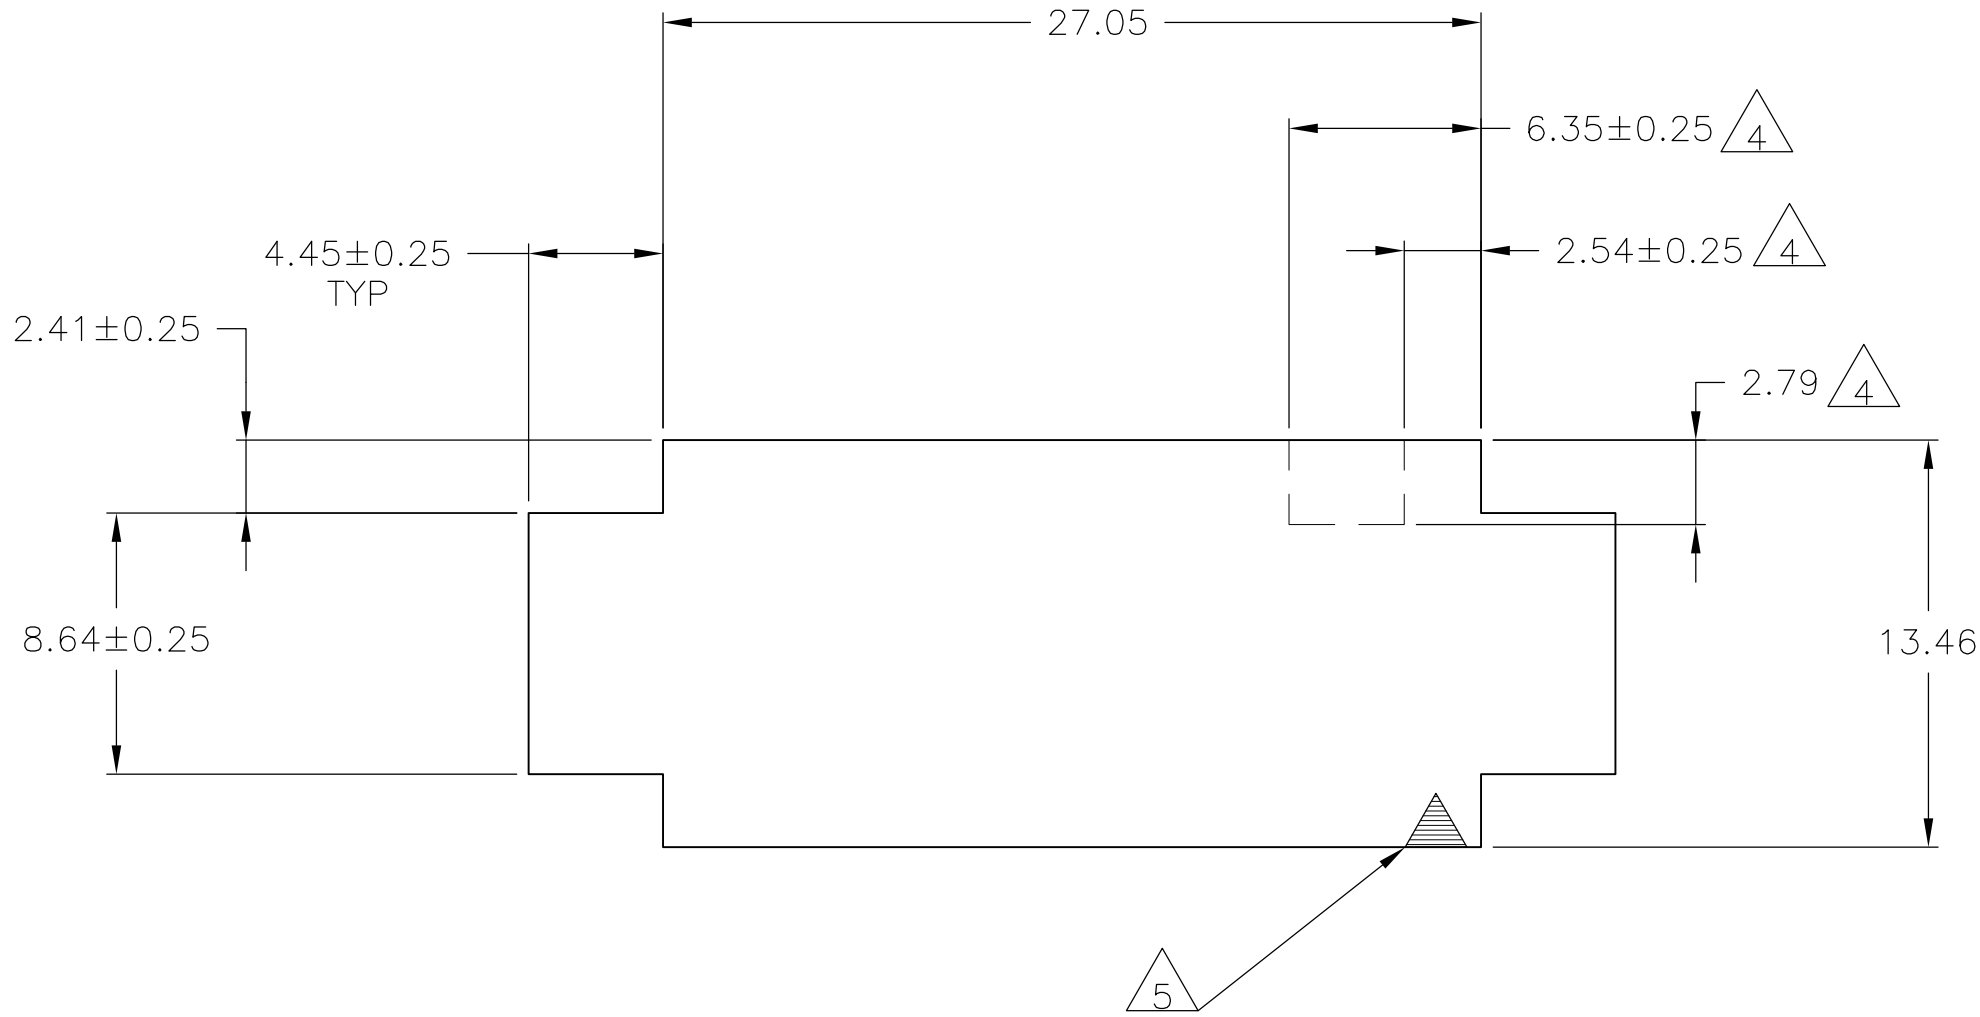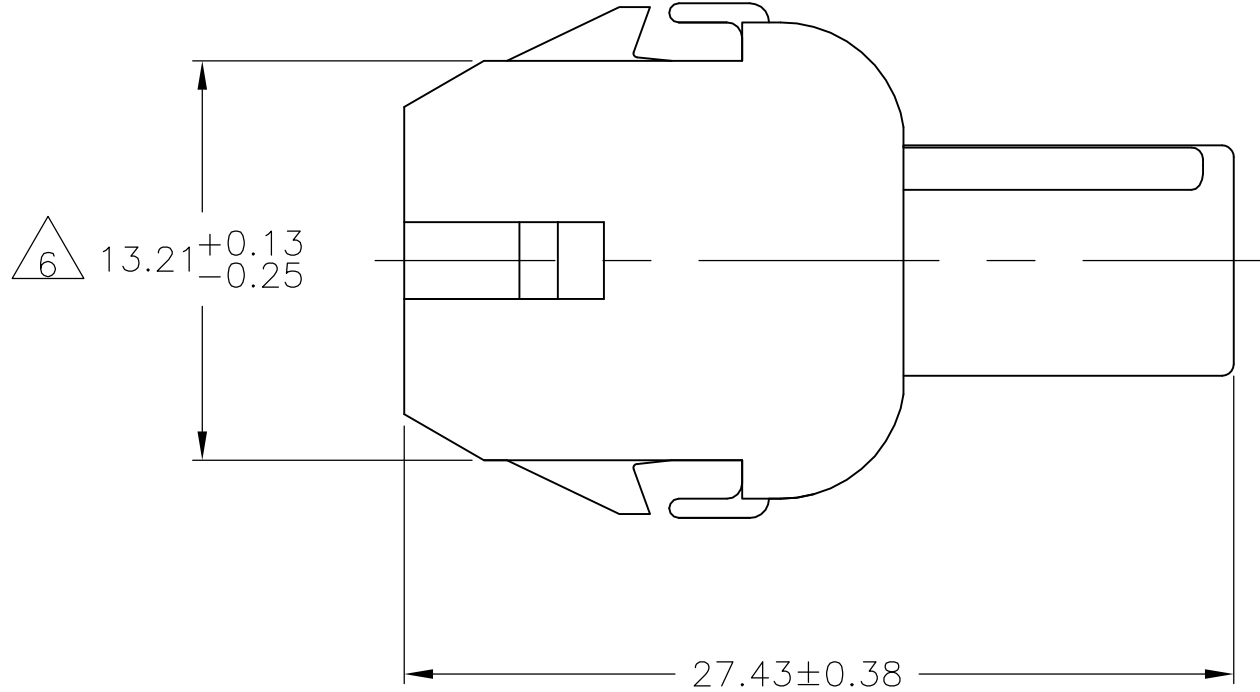


RECOMMENDED PANEL CUT OUT

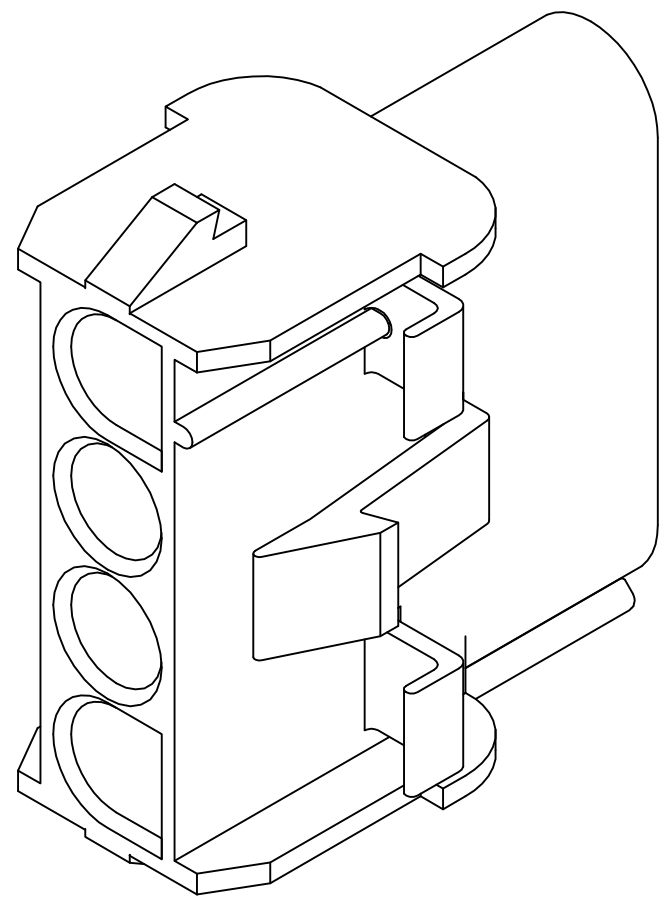

3-DIMENSIONAL MODEL
NTS

4.45	.175	27.43	1.080
2.79	.110	27.05	1.065
2.54	.100	26.67	1.050
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN

CONVERSION TABLE

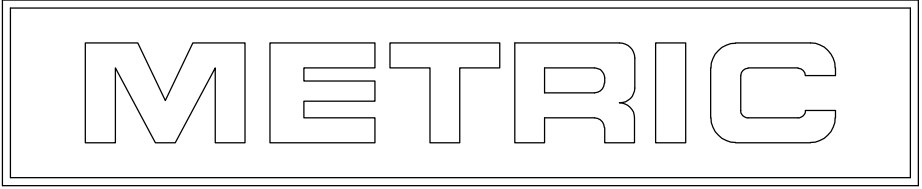

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 15JUL92	TE Connectivity			
DIMENSIONS: mm		CHK R. SWING 15JUL92				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD D. SELF 20JUL92	NAME CAP.4 CIRCUIT, UNIVERSAL MATE-N-LOK™			
0. PLC ± .010 1. PLC ± .010 2. PLC ± .010 3. PLC ± .010 4. PLC ± .010 ANGLES ± 1°		PRODUCT SPEC APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO			
MATERIAL NYLON,UL 94V-0		FINISH -	WEIGHT -			
CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 1		REV V2