

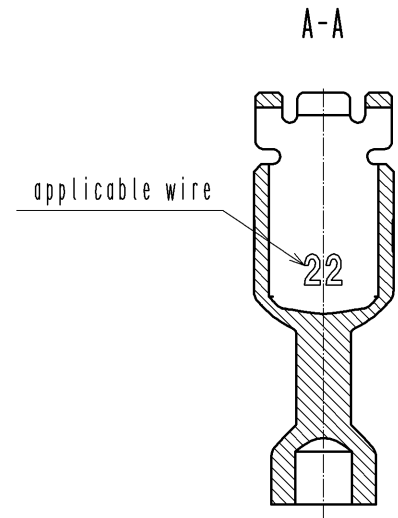
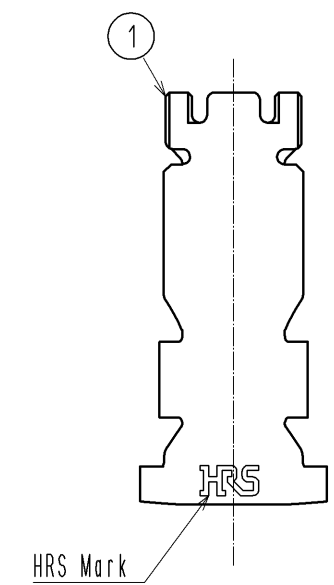
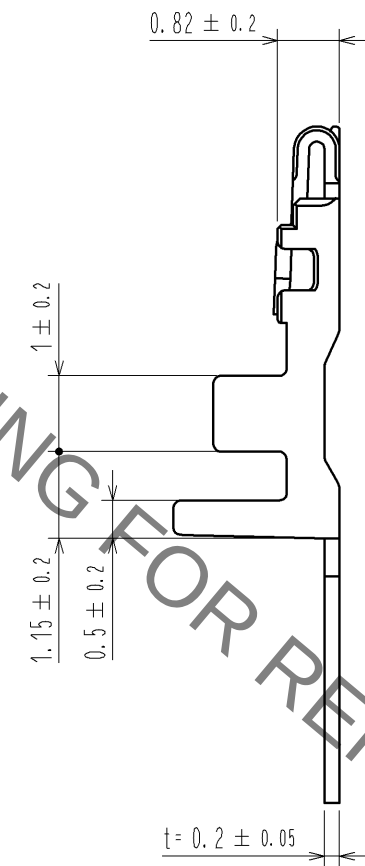



Jul.1.2019 Copyright 2019 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

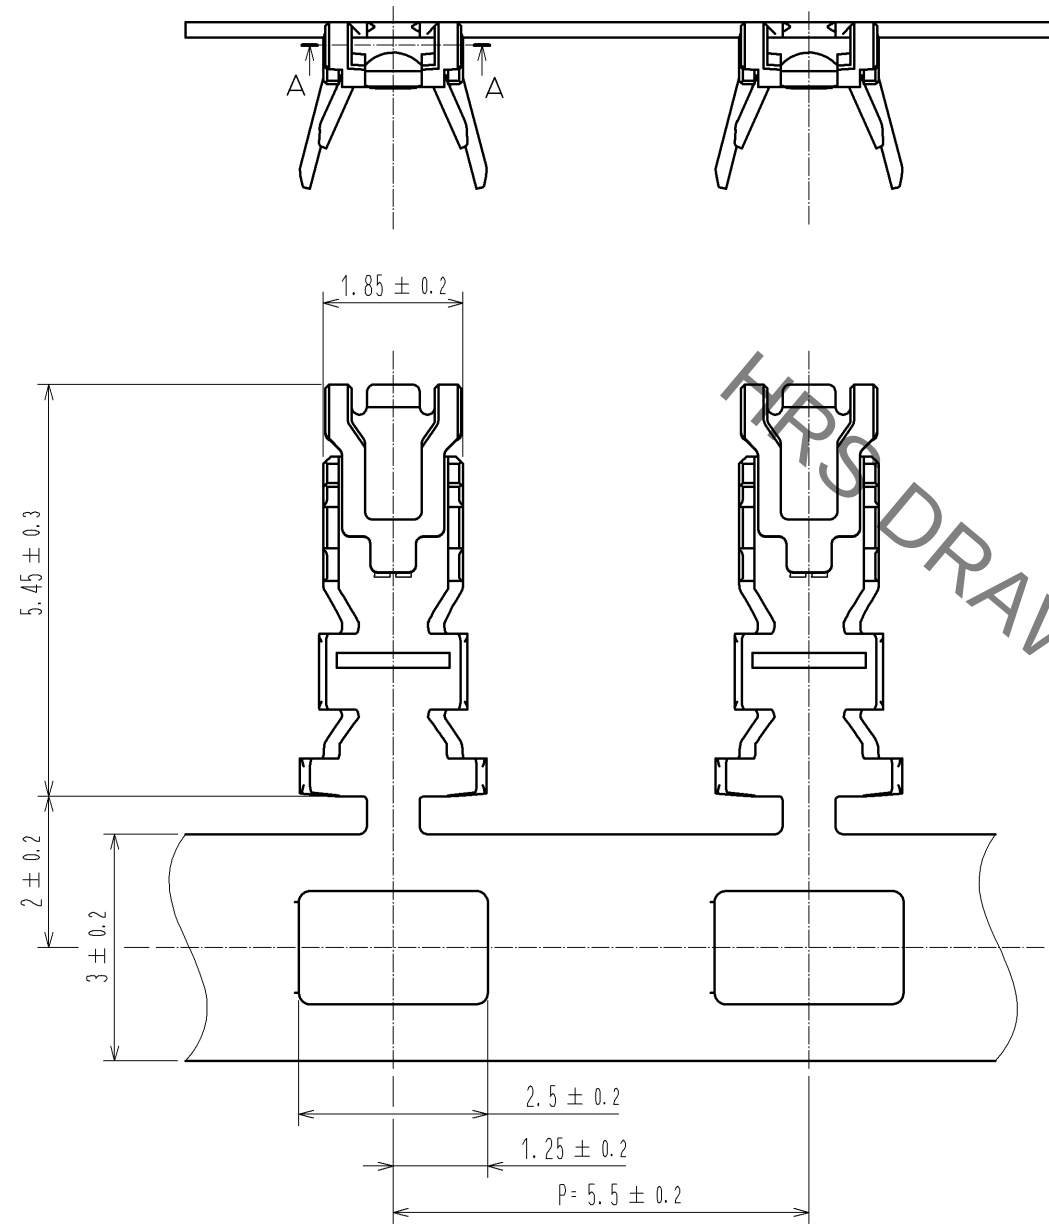

2 Reel style and dimensions

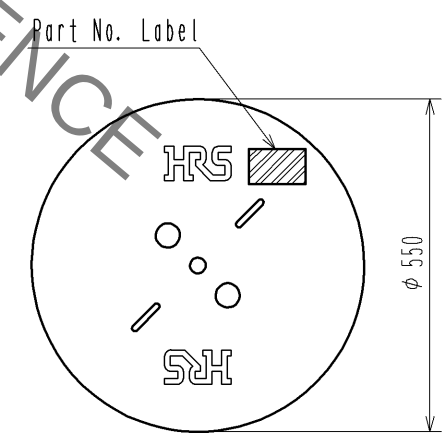

Detail Of Part No. Label

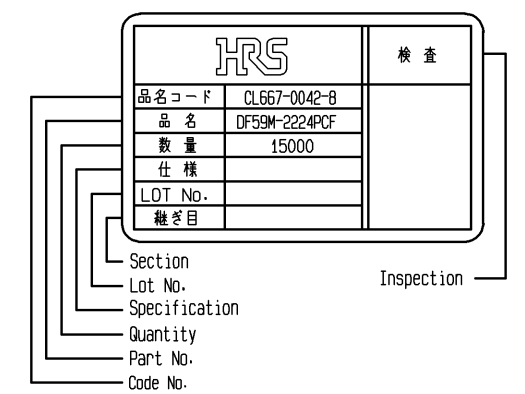

- Notes
- 1RL : 15000 contacts.
 - 2 Style of reel and box are shown in figure.
 3. Please be sure to check the form of crimping using a cable when you adjust applicator.
 4. Always refer to the manuals below for operation of this product.
For Cable assembly / Cable assembly procedure ETAD-H0778
For Mating/Unmating / Operation manual ETAD-H0779

NO.		MATERIAL		FINISH . REMARKS		1	Copper Alloy	Surface :Tin plating 1μm MIN
UNITS		SCALE		COUNT		DESCRIPTION OF REVISIONS		DESIGNED
mm		10 : 1		△		APPROVED : HK. UMEHARA		14. 05. 20
HRS		HIROSE		ELECTRIC		CHECKED : HK. UMEHARA		14. 05. 20
CO., LTD.		DESIGNED : SZ. ONO		14. 05. 19		DRAWN : SZ. ONO		14. 05. 19
DRAWING NO.		EDC3-356515-01		PART NO.		DF59M-2224PCF		CODE NO.
CL667-0042-8-00		△		1				