


E15C7 Series

- RoHS Compliant (Pb-Free)
- LVPECL output oscillators
- 2.5V supply voltage
- Ceramic 6-pad SMD package
- Stability to ± 25 ppm
- Tri-State output
- Complementary output
- Available on tape and reel
- Wide range of available frequencies



ECLIPTEK
CORPORATION

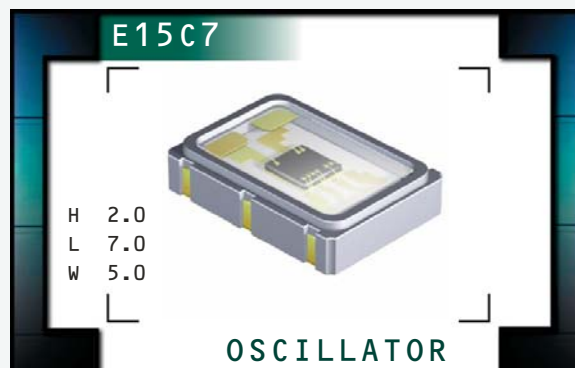

ELECTRICAL SPECIFICATIONS

Nominal Frequency (MHz)	77.760M, 78.125M, 80M, 80.157M, 85M, 87.125M, 90M, 100M, 106.25M, 110M, 119M, 120M, 122.888M, 124.4M, 125M, 127M, 128M, 133M, 133.333M, 137.472M, 150M, 155.52M, 156.25M, 159.375M, 161.1328M, 162.5M, 166M, 170M, 175M, 176.83816M, 187.5M, 187.509375M, 200M, or 212.5MHz
--------------------------------	---

Operating Temperature Range	0°C to 70°C, or -40°C to +85°C
------------------------------------	--------------------------------

Storage Temperature Range	-55°C to 125°C
----------------------------------	----------------

Supply Voltage (V_{CC})	2.5V _{DC} $\pm 5\%$
---	------------------------------

Input Current	75mA Maximum
----------------------	--------------

Frequency Tolerance / Stability	Inclusive of All Conditions: Calibration Tolerance at 25°C, Frequency Stability over the Operating Temperature Range, Supply Voltage Change, Output Load Change, 1st Year Aging at 25°C, Shock, and Vibration	± 100 ppm, ± 50 ppm, or ± 25 ppm Maximum
--	---	--

Output Voltage Logic High (V_{OH})	0°C to 85°C -40°C to 0°C	$V_{CC} - 1.025V_{DC}$ Minimum $V_{CC} - 1.085V_{DC}$ Minimum
--	-----------------------------	--

Output Voltage Logic Low (V_{OL})	0°C to 85°C -40°C to 0°C	$V_{CC} - 1.405V_{DC}$ Maximum $V_{CC} - 1.305V_{DC}$ Maximum
---	-----------------------------	--

Rise Time / Fall Time	20% to 80% of waveform	300pSec Typical, 700pSec Maximum
------------------------------	------------------------	----------------------------------

Duty Cycle	at 50% of waveform	50 ± 5 (%)
-------------------	--------------------	----------------

Load Drive Capability		50 Ohms into $V_{CC} - 2.0V_{DC}$
------------------------------	--	-----------------------------------

Logic Control / Additional Output		Complementary Output and Tri-State
--	--	------------------------------------

Tri-State Input Voltage	V_{IH} of 70% of V_{CC} Minimum No Connection V_{IL} of 30% of V_{CC} Maximum	Enables Output Enables Output Disables Output: High Impedance
--------------------------------	---	---

Standby Current	Without Load	30 μ A Maximum
------------------------	--------------	--------------------

Start Up Time		10 mSeconds Maximum
----------------------	--	---------------------

RMS Phase Jitter	FJ = 12kHz to 20MHz	0.4pSec Typical, 1 pSec Maximum
-------------------------	---------------------	---------------------------------

Typical Phase Noise	Fo=156.250MHz	-60dBc/Hz at 10Hz Offset -95dBc/Hz at 100Hz Offset -125dBc/Hz at 1kHz Offset -143dBc/Hz at 10kHz Offset -145dBc/Hz at 100kHz Offset -145dBc/Hz at 1MHz Offset -146dBc/Hz at 10MHz Offset
----------------------------	---------------	--

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
E15C7

PACKAGE
CERAMIC

VOLTAGE
2.5V

CLASS
OS1C

REV. DATE
01/07

PART NUMBERING GUIDE

E15C7 E 2 F - 155.520M TR

FREQUENCY TOLERANCE & STABILITY/ OPERATING TEMPERATURE RANGE

C=±100ppm Maximum over 0°C to +70°C
D=±50ppm Maximum over 0°C to +70°C
E=±25ppm Maximum over 0°C to +70°C
G=±100ppm Maximum over -40°C to +85°C
H=±50ppm Maximum over -40°C to +85°C
J=±25ppm Maximum over -40°C to +85°C (*)

AVAILABLE OPTIONS

Blank=Tubes
TR=Tape and Reel (Standard)

FREQUENCY

LOGIC CONTROL/ADDITIONAL OUTPUT


F=Complementary Output and Tri-State

DUTY CYCLE

2=50±5(%)


(*) Not available over Nominal Frequency range of 176.83816MHz to 212.500MHz

MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

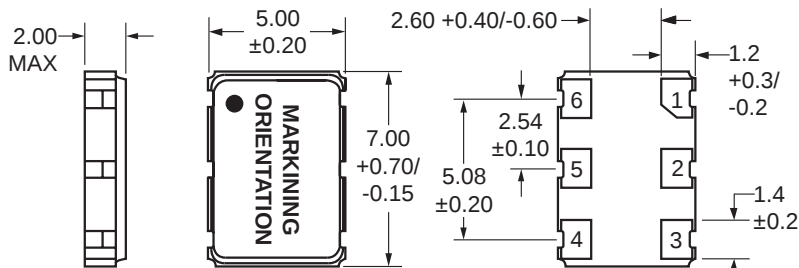


Pin 1: Tri-State
Pin 2: No Connect
Pin 3: Case Ground
Pin 4: Output
Pin 5: Complementary Output
Pin 6: Supply Voltage

SUGGESTED SOLDER PAD LAYOUT ALL DIMENSIONS IN MILLIMETERS

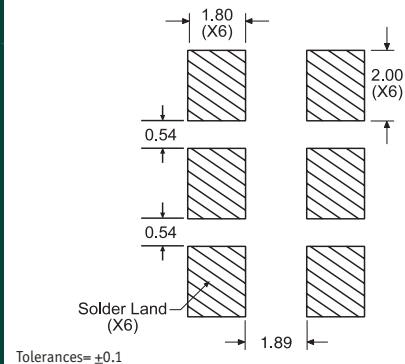


Tolerances=±0.1

TAPE AND REEL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

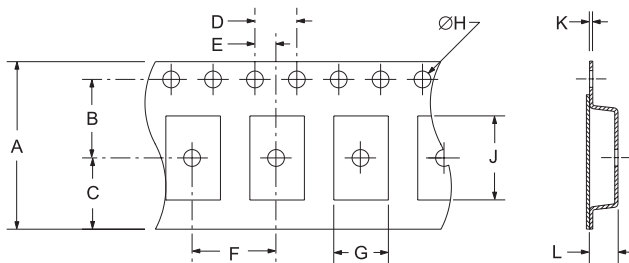

TAPE	A	B	C	D	E
	16±.3-1	7.5±.1	6.75±.1	4±.1	2±.1
F	G	H	J	K	L
8±.1	B0*	1.5+1-0	A0*	.3±.05	K0*

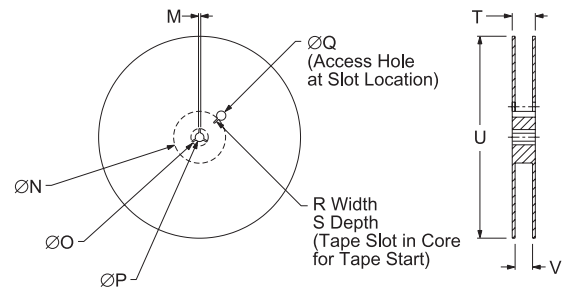

REEL	M	N	O	P	Q
	1.5 MIN	50 MIN	20.2 MIN	13±.2	40 MIN
R	S	T	U	V	QTY/REEL
2.5 MIN	10 MIN	22.4 MAX	360 MAX	16.4+2-0	1,000

*Compliant to EIA 481A

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic

Fine Leak Test
Gross Leak Test
Mechanical Shock
Vibration
Solderability
Temperature Cycling
Resistance to Soldering Heat
Resistance to Solvents

Specification

MIL-STD-883, Method 1014, Condition A
MIL-STD-883, Method 1014, Condition C
MIL-STD-202, Method 213, Condition C
MIL-STD-883, Method 2007, Condition A
MIL-STD-883, Method 2002
MIL-STD-883, Method 1010
MIL-STD-202, Method 210
MIL-STD-202, Method 215

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: XX.XXX M

Frequency in MHz (5 Digits Maximum + Decimal)

Line 3: XX Y ZZ

Week of Year
Last Digit of Year
Eclipse Manufacturing Identifier

MANUFACTURER	CATEGORY	SERIES	PACKAGE	VOLTAGE	CLASS	REV. DATE
ECLIPTEK CORP.	OSCILLATOR	E15C7	CERAMIC	2.5V	OS1C	01/07