









REV.	DESCRIPTION	DATE
A	RELEASE	2012/11/7




NOTES:
Insulator Material: PBT, UL 94V-0
Contact Plating: Gold flash over nickel
Contact Material: Brass

Current Rating : 1A AC,DC
Contact Resistance: 20MΩ Max.
Dielectric Withstanding: AC 500V
Insulator Resistance: 1000MΩ Min.
Operating Temp.: -40°C~+105°C

NUMBER OF POSITIONS	DIMENSION	
	A	B
08	7.62	14.86
10	10.16	17.40
12	12.70	19.94
14	15.24	22.48
16	17.78	25.02
18	20.32	27.56
20	22.86	30.10
22	25.40	32.64
24	27.94	35.18
26	30.48	37.72
30	35.56	42.80
34	40.64	47.88
36	43.18	50.42
40	48.26	55.50
44	53.34	60.58
50	60.96	68.20
60	73.66	80.90
64	78.74	85.98

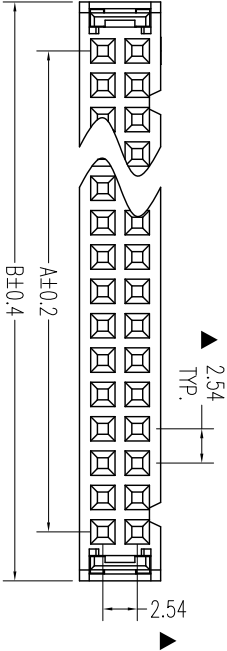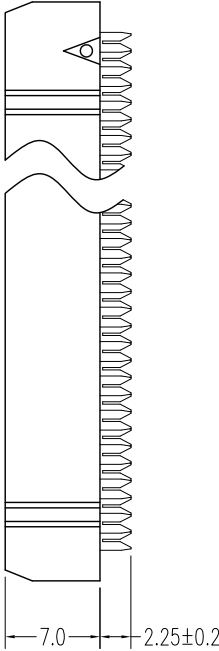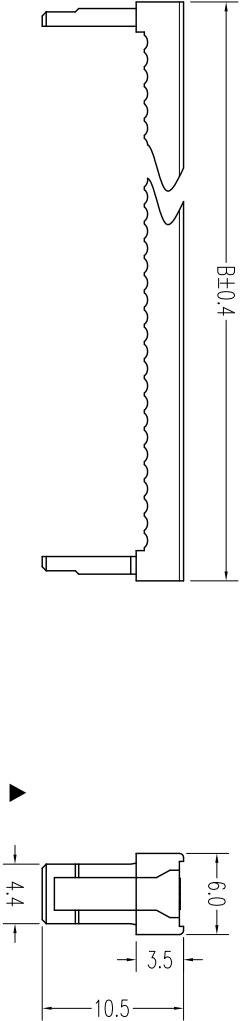

14P-64P



UNLESS TOLERANCE		DRAW	BY	CnC Tech,LLC				
GENERAL	ANGLE	DESIGN	BY					
X. ± 0.30	X.° ± 3.0°	CHECK	BY			Part NO.	3030-XX-0101-00	
.X ± 0.25	.X° ± 2.0°	APPROVE	BY					
.XX ± 0.20	.XX° ± 1.0°	SCALE				SHEET		
.XXX ± 0.10	.XXX ± 0.5°							
SCALE		1:1	1/1	UNIT				
DRAW NO:		MM		REV: A				

A

B

C

D

A

B

C

D