



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

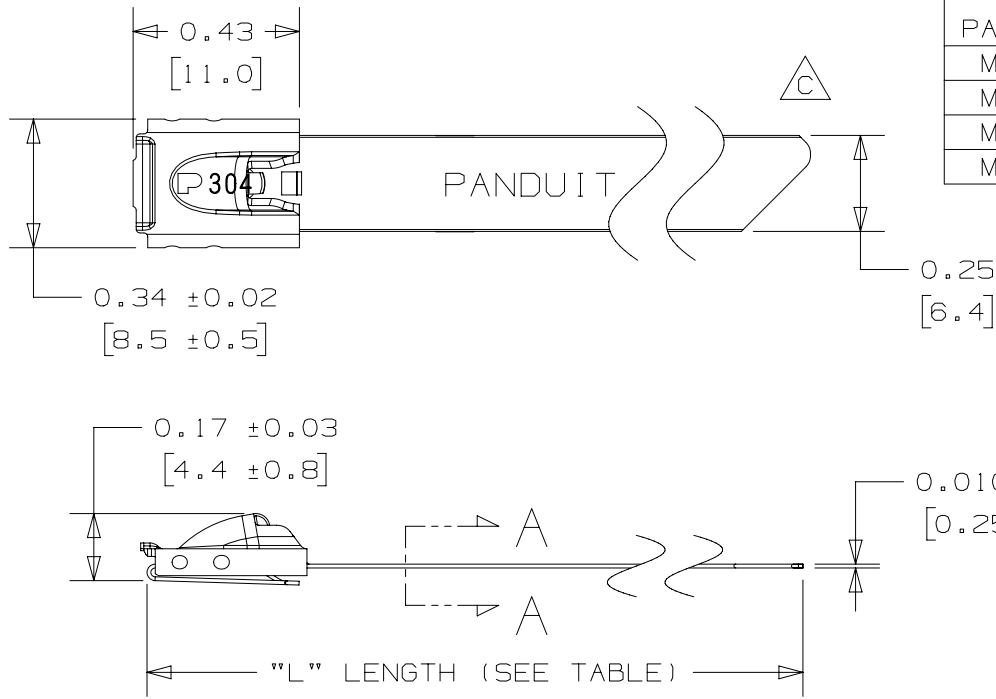

PANDUIT PART NUMBER	MAXIMUM BUNDLE DIAMETER	PACKAGE QUANTITY	LENGTH = L ±.3 [ 7 ]
MLT2LH-LP	2.0" [ 51 ]	50	7.9" [ 201 ]
MLT4LH-LP	4.0" [ 102 ]	50	14.3" [ 362 ]
MLT6LH-LP	6.0" [ 152 ]	50	20.5" [ 521 ]
MLT8LH-LP	8.0" [ 203 ]	50	26.8" [ 679 ]

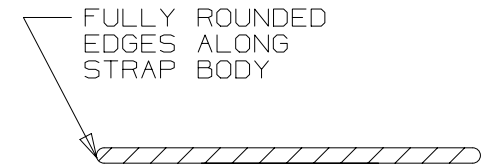

SECTION A - A  
SCALE 8:1

NOTES:

1. APPLICATION TOOLS - GS4MT, PPTMT, ST2MT, ST3MT, AND HTMT
2. MINIMUM LOOP TENSILE STRENGTH - 250 LBS. (1112 NEWTONS) WHEN TESTED ON A 1 1/2" MANDREL
3. BRACKETS [ ] DENOTE DIMENSIONS IN MILLIMETERS, AND ARE SHOWN FOR REFERENCE ONLY
4. TOLERANCES:  
 .XXX = ±.010 [ .25 ]      .XX = ±.02 [ .5 ]  
 .X = ±.03 [ .8 ]          ANGLES = ±2°

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN	TITLE			MATERIAL:		
							METAL LOCKING TIE LIGHT - HEAVY SERIES 304 STAINLESS			304 STAINLESS STEEL		
							CUSTOMER DRAWING			<b>PANDUIT</b>		
							ITEM REVISION NAME N41126BS/05					
							DATASET FILE NAME N41126BS/05			DRAWING NUMBER: N41126BS_DC		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [ mm ]					
							.x ± .1 [ 2.54 ]      .xxx ± .005 [ .127 ] .xx ± .01 [ .25 ]      ANGLES ± 5 °					
5	09.30.15	BDK	SKB	RGRO	C. ADDED NEW TIP CONFIGURATION	N41126BS_DC	THIRD ANGLE PROJECTION					
							DRAWN BY JAMB	DATE 6/03	CHK DPN	SCALE 2:1	SHT 1 OF 1	SIZE A