

TYPE -AM	ELOPTION -R: RoHS COMPLIANT - LEAD FREE
CONFIGURATION -S: SINGLE	RA TERMINATION -TH: THROUGH HOLE






1.  REPRESENTS A CRITICAL DIMENSION.
2. VERIFY -S PLATING, VISUALLY CHECK -F ONLY.
3. ALL PARTS ARE RoHS COMPLIANT WITH OR WITHOUT -R.

-F: GOLD FLASH ON MATING AREA,
BRIGHT ACID TIN ON TAILS (100U" MIN)
W/ NICKEL UNDERPLATE (SEE NOTE 3 FOR -RC)
-S: .000030" GOLD ON MATING AREA,
BRIGHT ACID TIN ON TAILS (100U" MIN)
W/ NICKEL UNDERPLATE (SEE NOTE 3 FOR -RC)

Diagram of a 4-pin DIN connector. The pins are labeled with their nominal values and tolerances in brackets:

- Pin 1: .024 [0.62]
- Pin 2: .276 [7.00]
- Pin 3: .079 [2.00]
- Pin 4: .079 [2.00]

The connector is shown with a label 'PA' on the side.

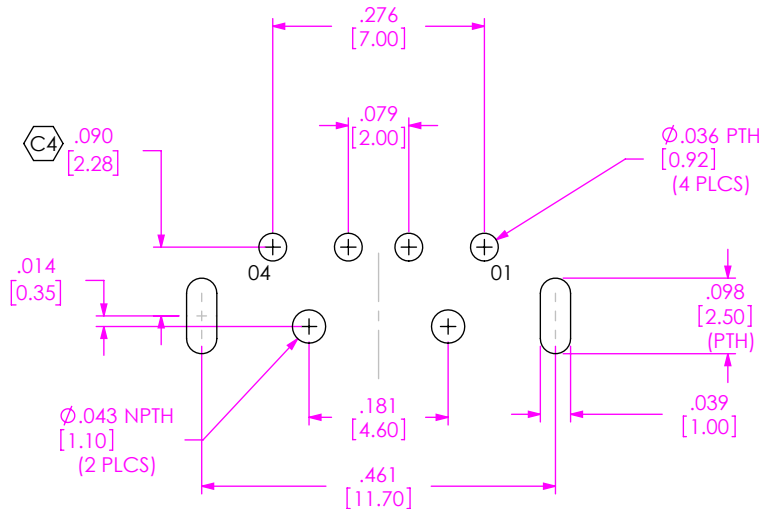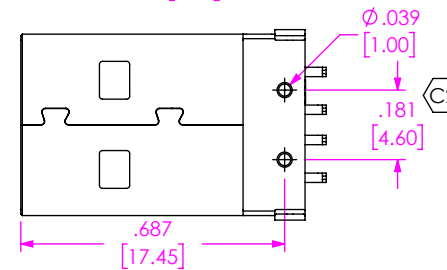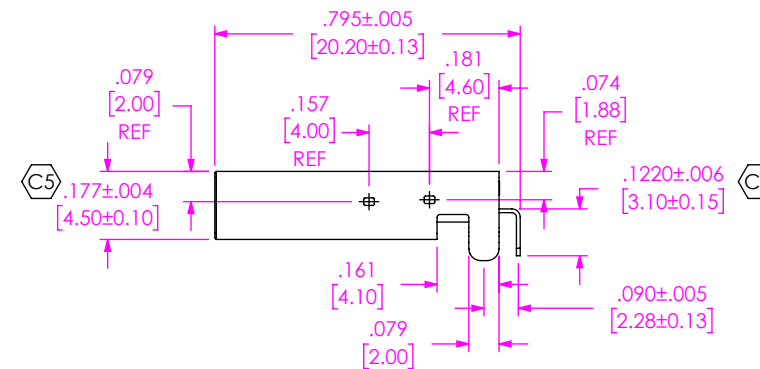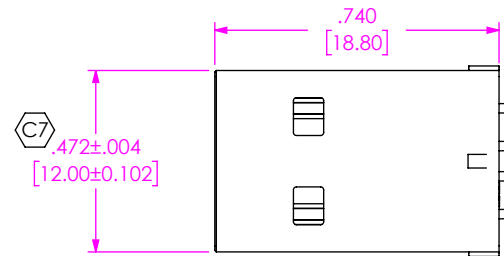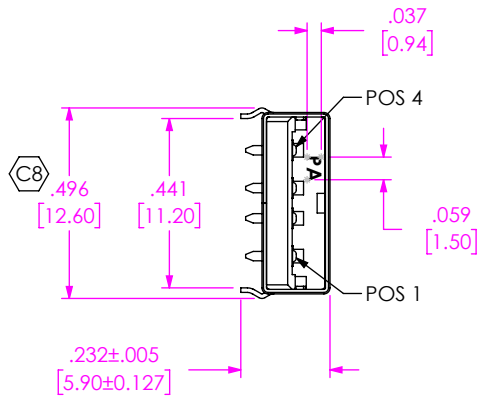

RECOMMENDED PCB LAYOUT

PROPRIETARY NOTE

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION AND ALL DESIGN, MANUFACTURING, REPRODUCTION, USE, PATENT RIGHTS AND SALES RIGHTS ARE EXPRESSLY RESERVED BY SAMTEC, INC. THIS DOCUMENT SHALL NOT BE DISCLOSED, IN WHOLE OR PART, TO ANY UNAUTHORIZED PERSON OR ENTITY NOR REPRODUCED, TRANSFERRED OR INCORPORATED IN ANY OTHER PROJECT IN ANY MANNER WITHOUT THE EXPRESS WRITTEN CONSENT OF SAMTEC, INC.

F:\dwa\misc\mktp\USB-AM-S-X-X-TH-X-MKT.SLDDRW

SHEET SCALE: 2:1

DWG. NO. USB-AM-S-X-X-TH-X

BY: LENNY K	10/19/06	SHEET 1 OF 1
-------------	----------	--------------