




Top View of Assembly

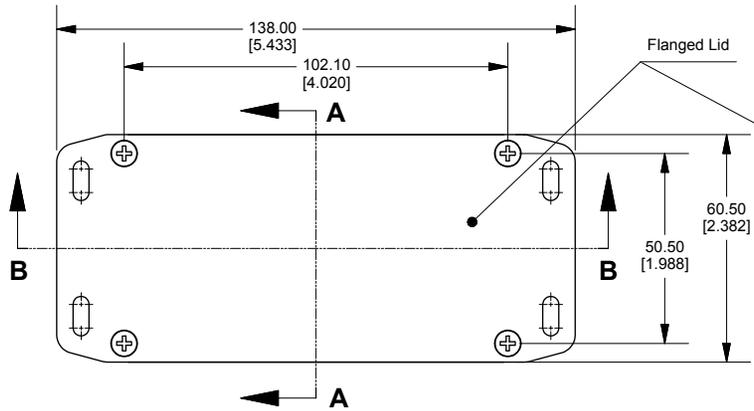


SECTION A-A End View of Assembly

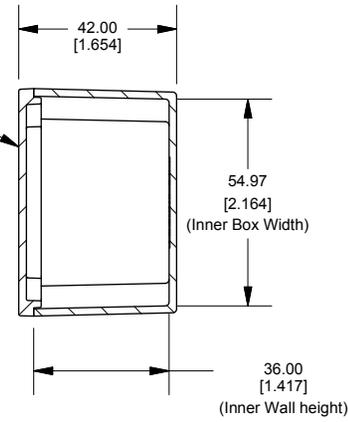


SECTION B-B Side View of Assembly

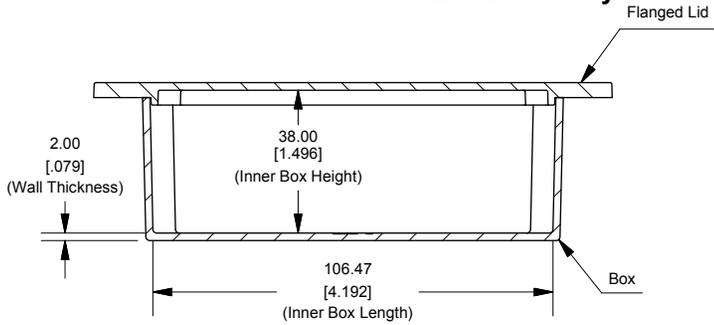


Top View Looking Inside Box

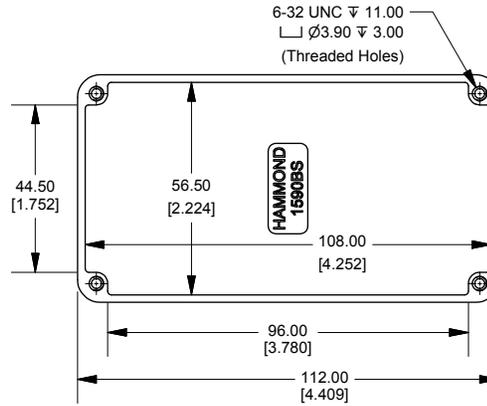

Flanged Lid

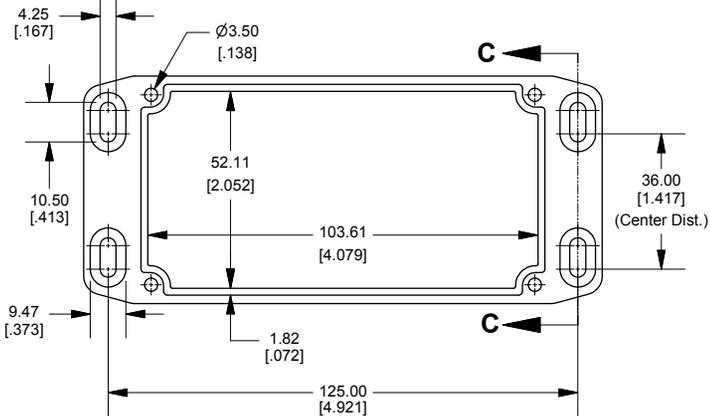

SECTION C-C Side of Slot

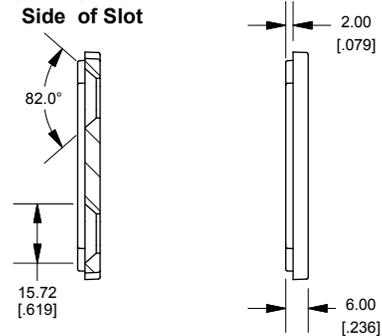

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory mjm@hammondmfg.com for quotes
Solid models of this enclosure available in STEP or IGES.

NOTE

Purchased assembly includes box, lid and 4 cover screws.
Box and lid are made from Diecast Aluminum Alloy (alloy type 380).
Silicone gasket supplied with liquid resistant enclosures.

PART NUMBERS

1590BSFL Enclosure	
Unfinished	1590BSFL
Grey Textured Polyester Powder Paint - RAL 7038	1590BSFLGY
Black Textured Polyester Powder Paint - RAL 9011	1590BSFLBK
1590BSFL Liquid Resistant Enclosure (Silicone Gasket)	
Unfinished	1590WBSFL
Black Textured Powder Paint	1590WBSFLBK
ACCESSORIES	
Recommended Torque: 75 ozf.in / 55 cN.m	
Black Textured Cover Screws (Pkg 100) [6-32 x 1/2" SS Type 304]	1590WMS100BK
Unfinished Cover Screws (Pkg 100) [6-32 x 1/2" SS Type 304]	1590WMS100
Standard Cover Screws	
Unfinished Cover Screws (Pkg 100) [6-32 x 1/2" Nickel Plated Screws]	1590MS100
Black Textured Cover Screws (Pkg 100) [6-32 x 1/2" Nickel Plated Screws]	1590MS100BK

