

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	PROPOSED	10JAN2018	CD	MM
	2	UPDATED	31JAN2018	CD	EH
	3	REVISED PER ECR-18-017862	22NOV2018	SR	DD

1 MATERIAL:
-POLYCARBONATE COLOR: SEE TABLE

2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)

3. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING


4. MODULE BASE TE P/N: 2213837-1

D

C


B

A

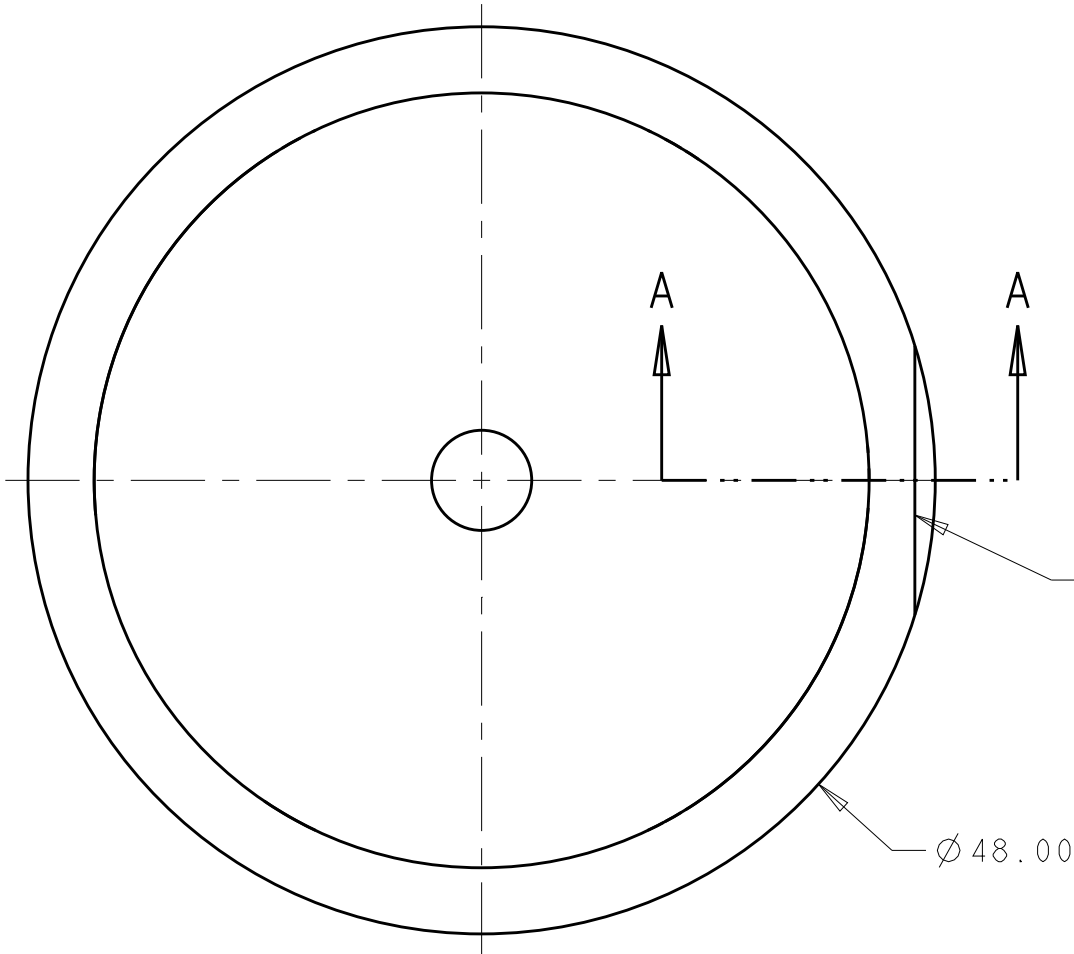

POLARIZATION
INDICATOR FOR
ALIGNMENT WITH
MODULE BASE




Ø48.00

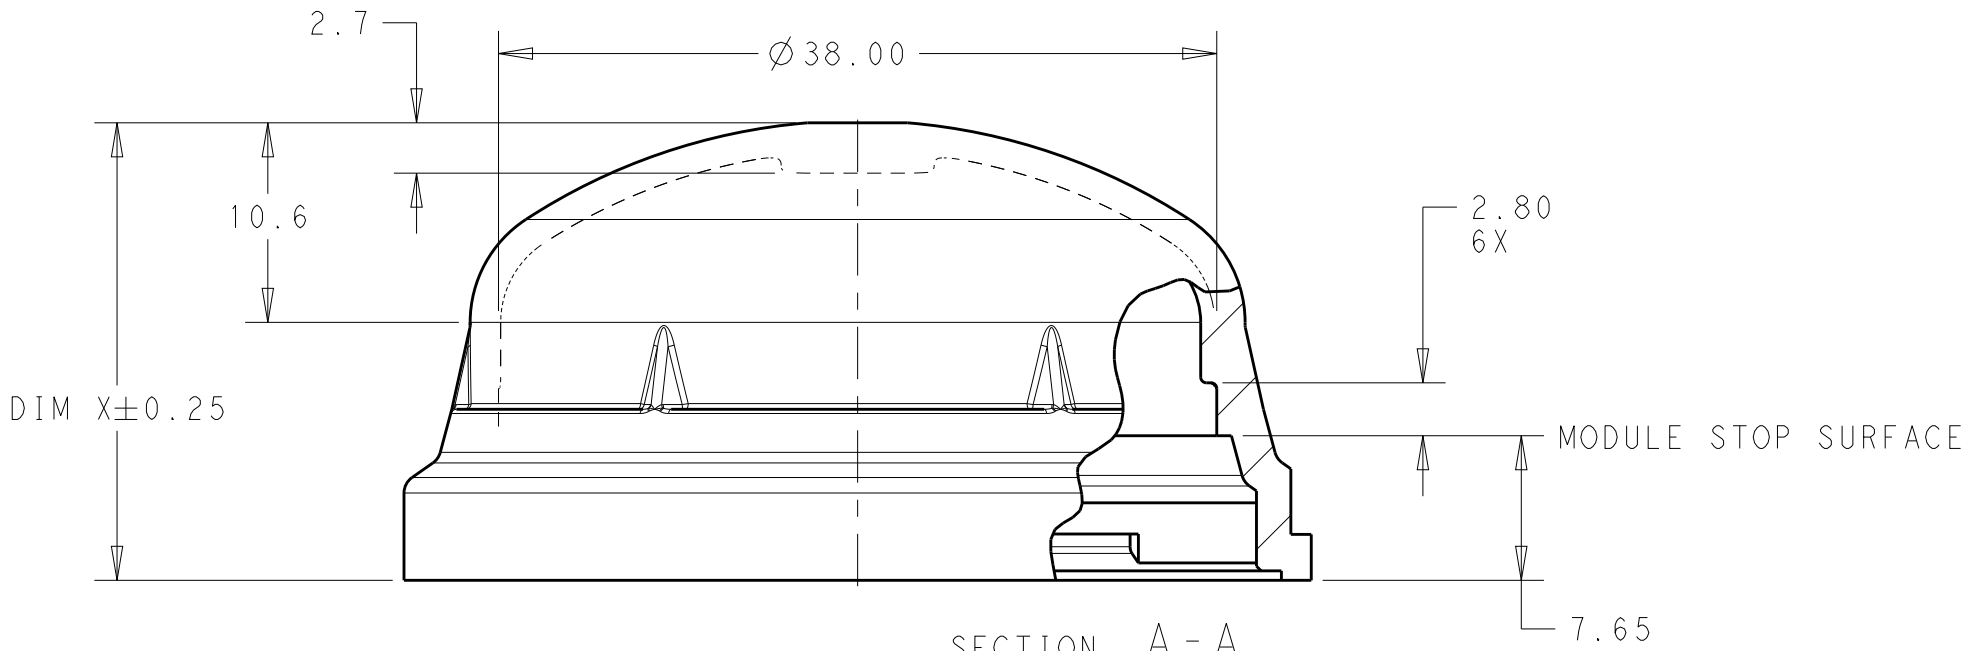



SECTION A - A

POLARIZATION
FEATURES

LATCH
3X

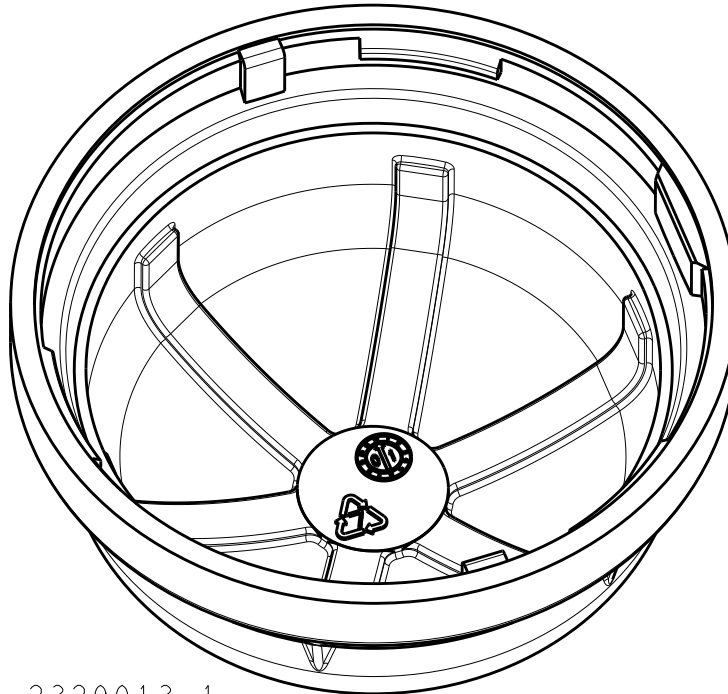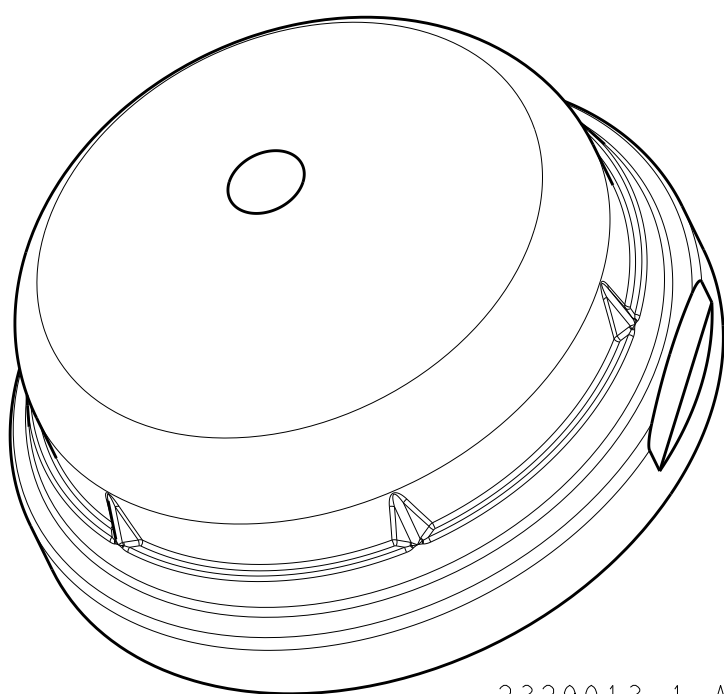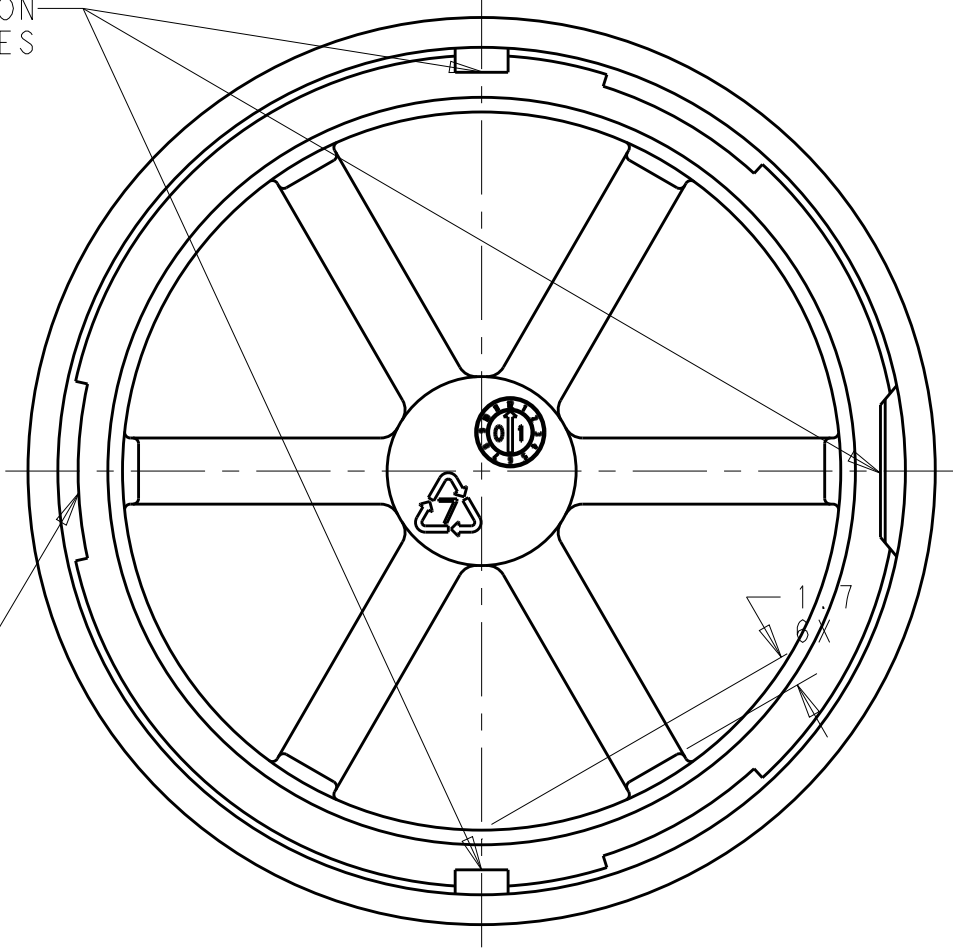

2329013-1 AND 1-2329013-1
SHOWN
SCALE 2:1

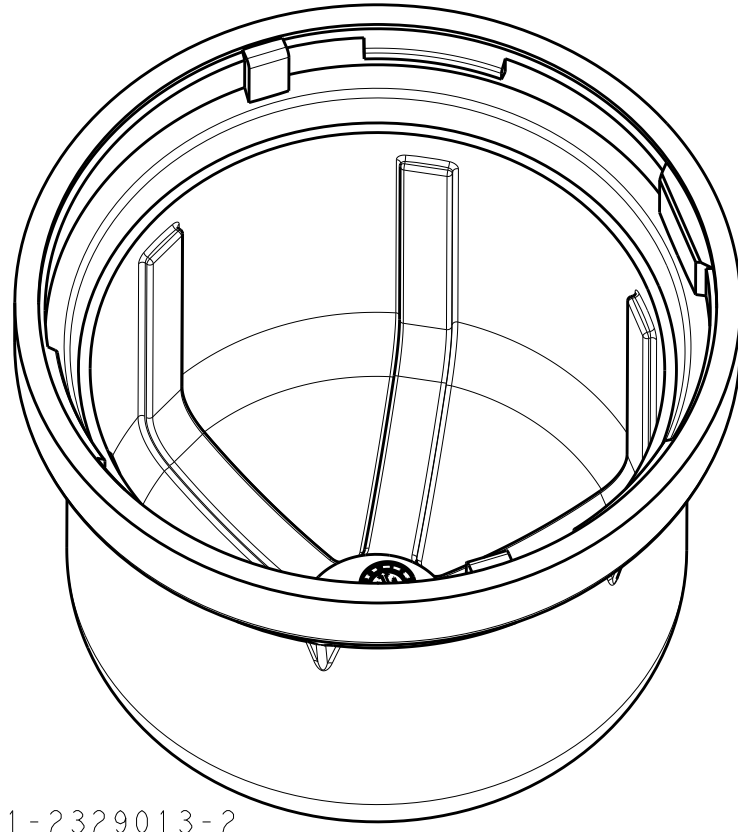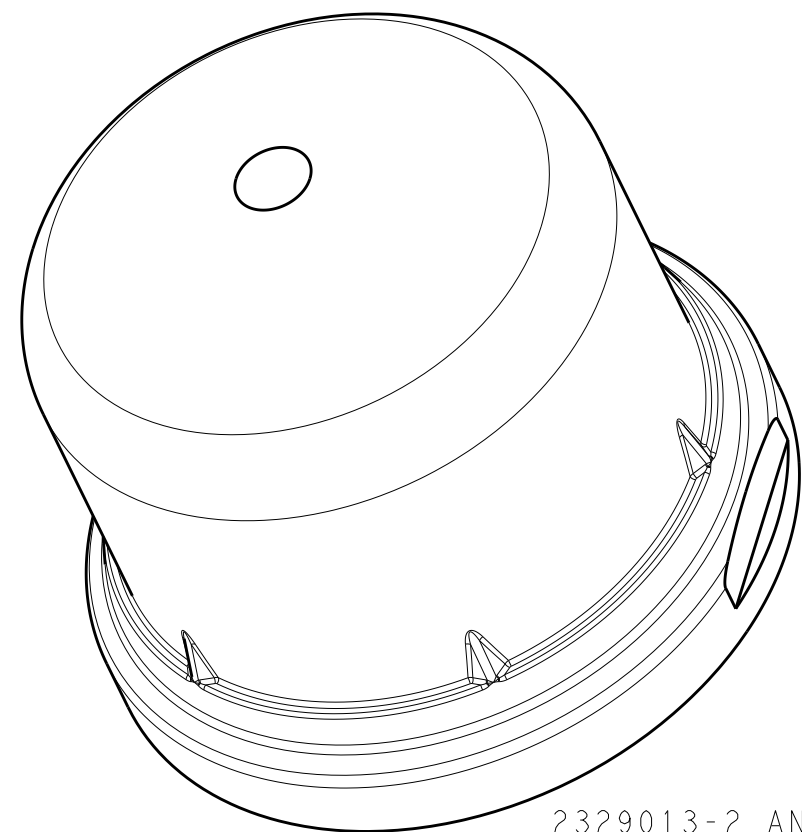

2329013-2 AND 1-2329013-2
SHOWN
SCALE 2:1

78	TRANSPARENT CLEAR	39.25	1-2329013-2
78	TRANSPARENT CLEAR	24.25	1-2329013-1
24	TRANSPARENT SMOKE	39.25	2329013-2
24	TRANSPARENT SMOKE	24.25	2329013-1
APPROX. LIGHT TRANSMISSION		COLOR	DIM X PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C. DAILY CHK M. STOLLER APVD -	10JAN2018 10JAN2018	TE TE Connectivity	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC	108-133073	NAME DOME, LUMAWISE ENDURANCE S, 40mm	
	0 PLC ±-	APPLICATION SPEC	114-133074	SIZE	CAGE CODE
	1 PLC ±0.2	WEIGHT	-	A200779	C-2329013
	2 PLC ±0.10	CUSTOMER DRAWING		SCALE	5:2
	3 PLC ±-			SHEET	1 OF 1
	4 PLC ±-			REV	A
MATERIAL SEE TABLE	FINISH -				
	-				