MICRO SWITCH
FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

PULSE SWITCH (ADJUSTABLE)

CATALOG LISTING
1PD1

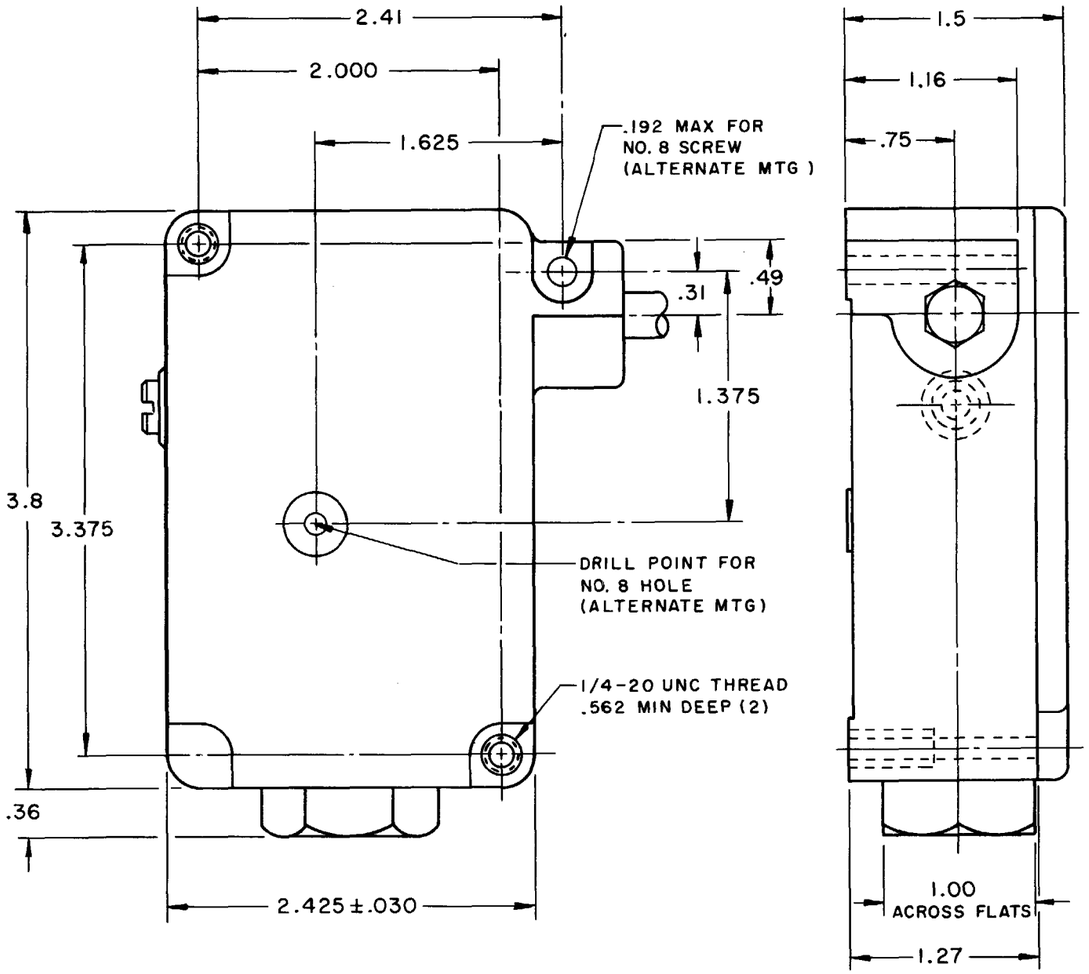

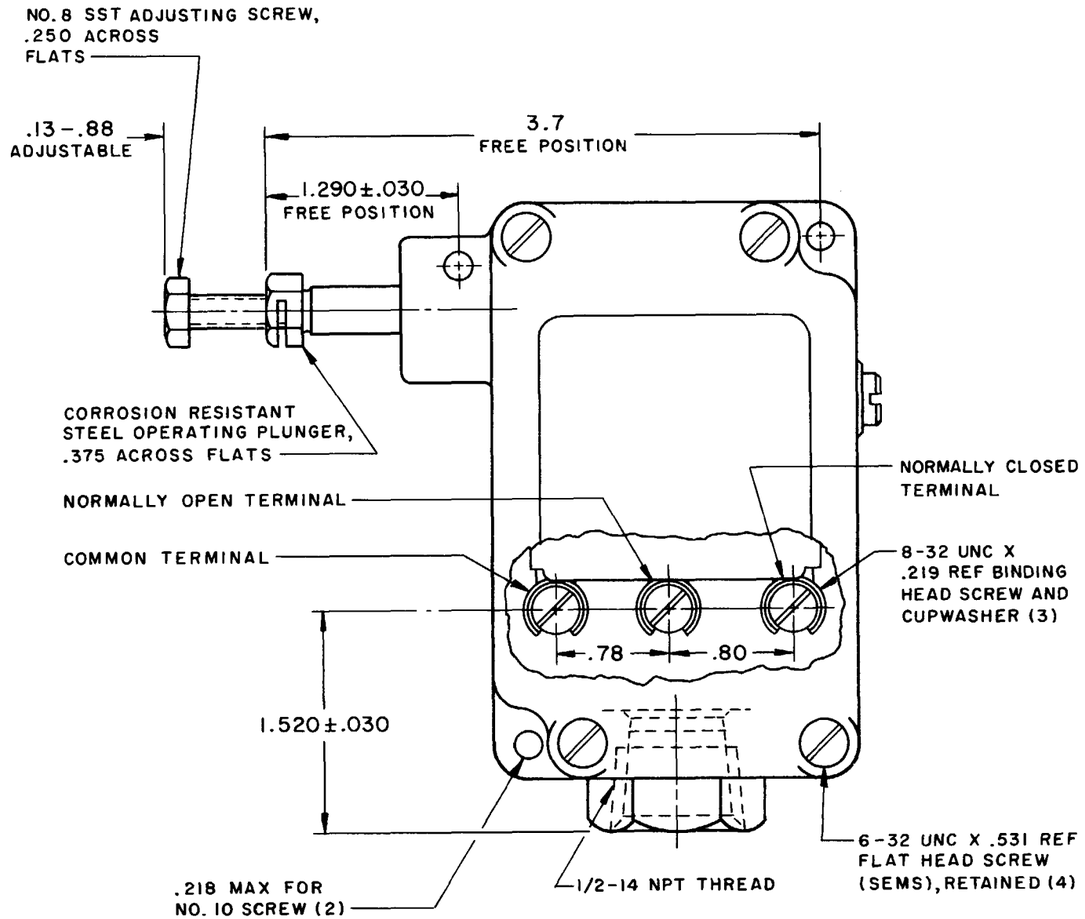

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA	
OPERATING FORCE – – – – – 3 1/2 LB MAX	CONTACT ARRANGEMENT S P D T	SCALE FULL
PRETRAVEL – – – – – – – – – – .110 MAX		DO NOT SCALE PRINT
PULSE POSITION – – – ADJUSTABLE FROM .030 – .450 BEYOND OPERATING POSITION	15 A – 125, 250 OR 480 VAC 1/2 A – 125 VDC; 1/4 A – 250 VDC 1/8 HP – 125 VAC; 1/4 HP – 250 VAC	UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±°
FORCE AT PULSE POSITION – – – – – – – – – 6 LB MAX		
SWITCH-BASIC REPLACEMENT – BZ-2RD776-P4		WEIGHT

NOTES
1 – ALUMINUM HOUSING AND COVER FINISHED IN GRAY PAINT
2 – IT IS ESSENTIAL TO PREVENT ENTRANCE OF HARMFUL AGENTS THRU THE CONDUIT OPENING TO OBTAIN THE FULL BENEFIT OF THE SEALED CONSTRUCTION PROVIDED IN THIS UNIT

REVISIONS

A	C021632	O M W 25 JUL 66
B	C026023-A	D L F 25 JUL 69
C	C045869B	G J W 7 JUL 79
D	C082531B	J A K 19 FEB 97

ISSUE 9 | DRAWING NUMBER M 1PD1 | RELEASE NO. | REPLACES

DRAWN O M W 25 JUL 66 | CHECK | CHECK L S D 26 JULY 66 | CHECK | CHECK

FORMTEK