


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

1. SPRING CONTACT PROBE w/4mm SAFETY JACK.
2. SPECIFICATIONS:
INSULATOR BODY: POLYAMIDE (NYLON)
PROBE BODY: BRASS, NICKEL PLATED
CONTACT: 4mm, 9 LEAF-PHOS. BRONZE-BERYLLIUM, NICKEL PLATED.
3. RATING:
IEC 61010-031 @ 1,000V CATIII / 600 V CAT IV, P2.
CURRENT: 36A MAX.
INTERNAL RESISTANCE: <5mΩ MAX.
TEMPERATURE: -25° C TO +80° C.
4. RoHS COMPLIANT (NOTED BY GREY TIP COVER).

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
—	CLASS A RELEASED	7/21/00	
A	UPDATED TO LATEST SPEC. RoHS & IEC 61010-031	6/10/08	

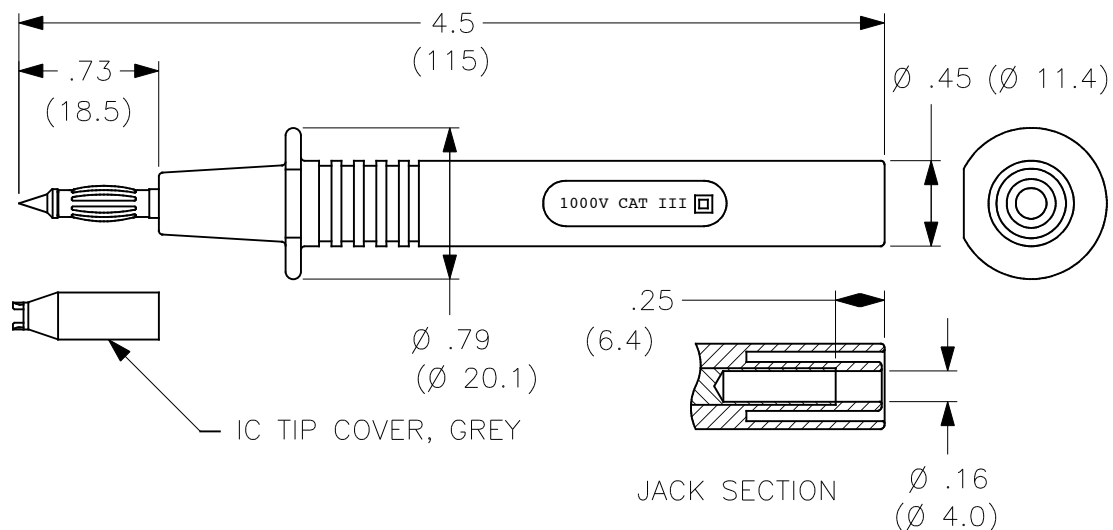

PART NUMBER

CT2265-#

COLOR: 0 - BLACK
2 - RED
4 - YELLOW
5 - GREEN
6 - BLUE
9 - WHITE

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS .XX ± .02 DECIMALS ± 1/32 .XXX ± .005 DO NOT SCALE DRAWING		CONTRACT NO.		Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610	
		MATERIAL		APPROVALS		TITLE	
		FINISH		DATE		PROBE BODY w/4mm CONTACT TIP	
NEXT ASSY		USED ON		DRAWN WDH		7/21/00	
APPLICATION				CHECKED		SIZE A	
				ENGR.		CAGE CODE 43F45	
				DESIGN ACTIVITY		DWG. NO. P226500	
						REV. A	
				SCALE 1:1		SHEET 1 OF 1	