

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REVISED PER ECO-07-023317	12/17/07	SS	MS

SPECIFICATIONS:




MATERIALS:
FIXED CONTACT: BRASS, SILVER OVER NICKEL PLATED.
FRAME: STEEL, TIN PLATED.
MOVABLE CONTACT: PHOS. BRONZE, SILVER PLATED.
TERMINAL BOARD: BAKELITE.

ELECTRICAL:
CONTACT RATING: 0.3A @ 125VAC.
INITIAL CONTACT RESISTANCE: 20 MILLIOHMS MAX.
INSULATION RESISTANCE: 100 MEGAOHMS MIN @ 500VDC.
DIELECTRIC STRENGTH: 500VAC.

MECHANICAL:
ACTUATOR TRAVEL: .079" PER POSITION.
ACTUATOR FORCE: 100 TO 700 GF.

ENVIRONMENTAL:
OPERATING & STORAGE TEMP.: -10°C TO +60°C.
MECHANICAL LIFE: 10,000 CYCLES MIN.

1. ALL MATERIALS AND FINISHES SHALL COMPLY WITH EU DIRECTIVE 2002/95/EC OF 27JAN2003 (ROHS).

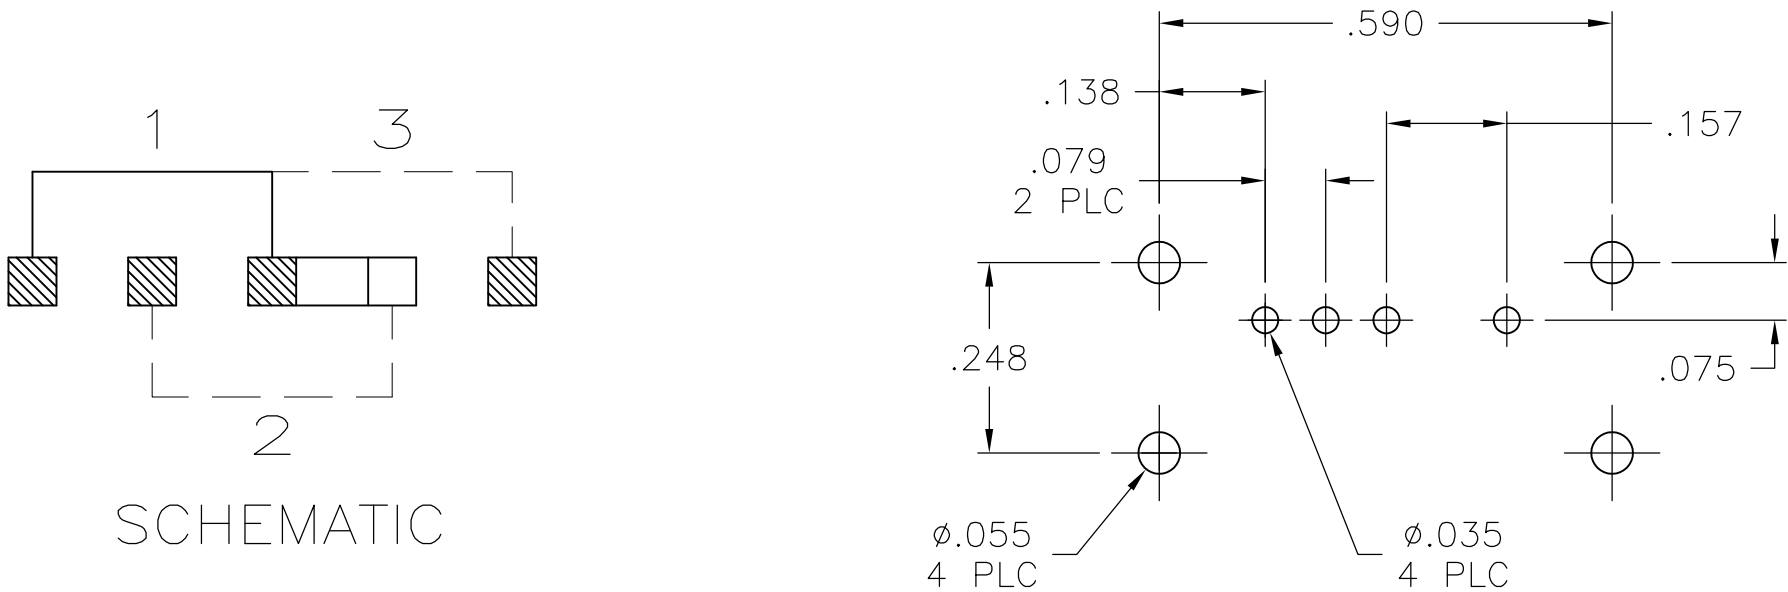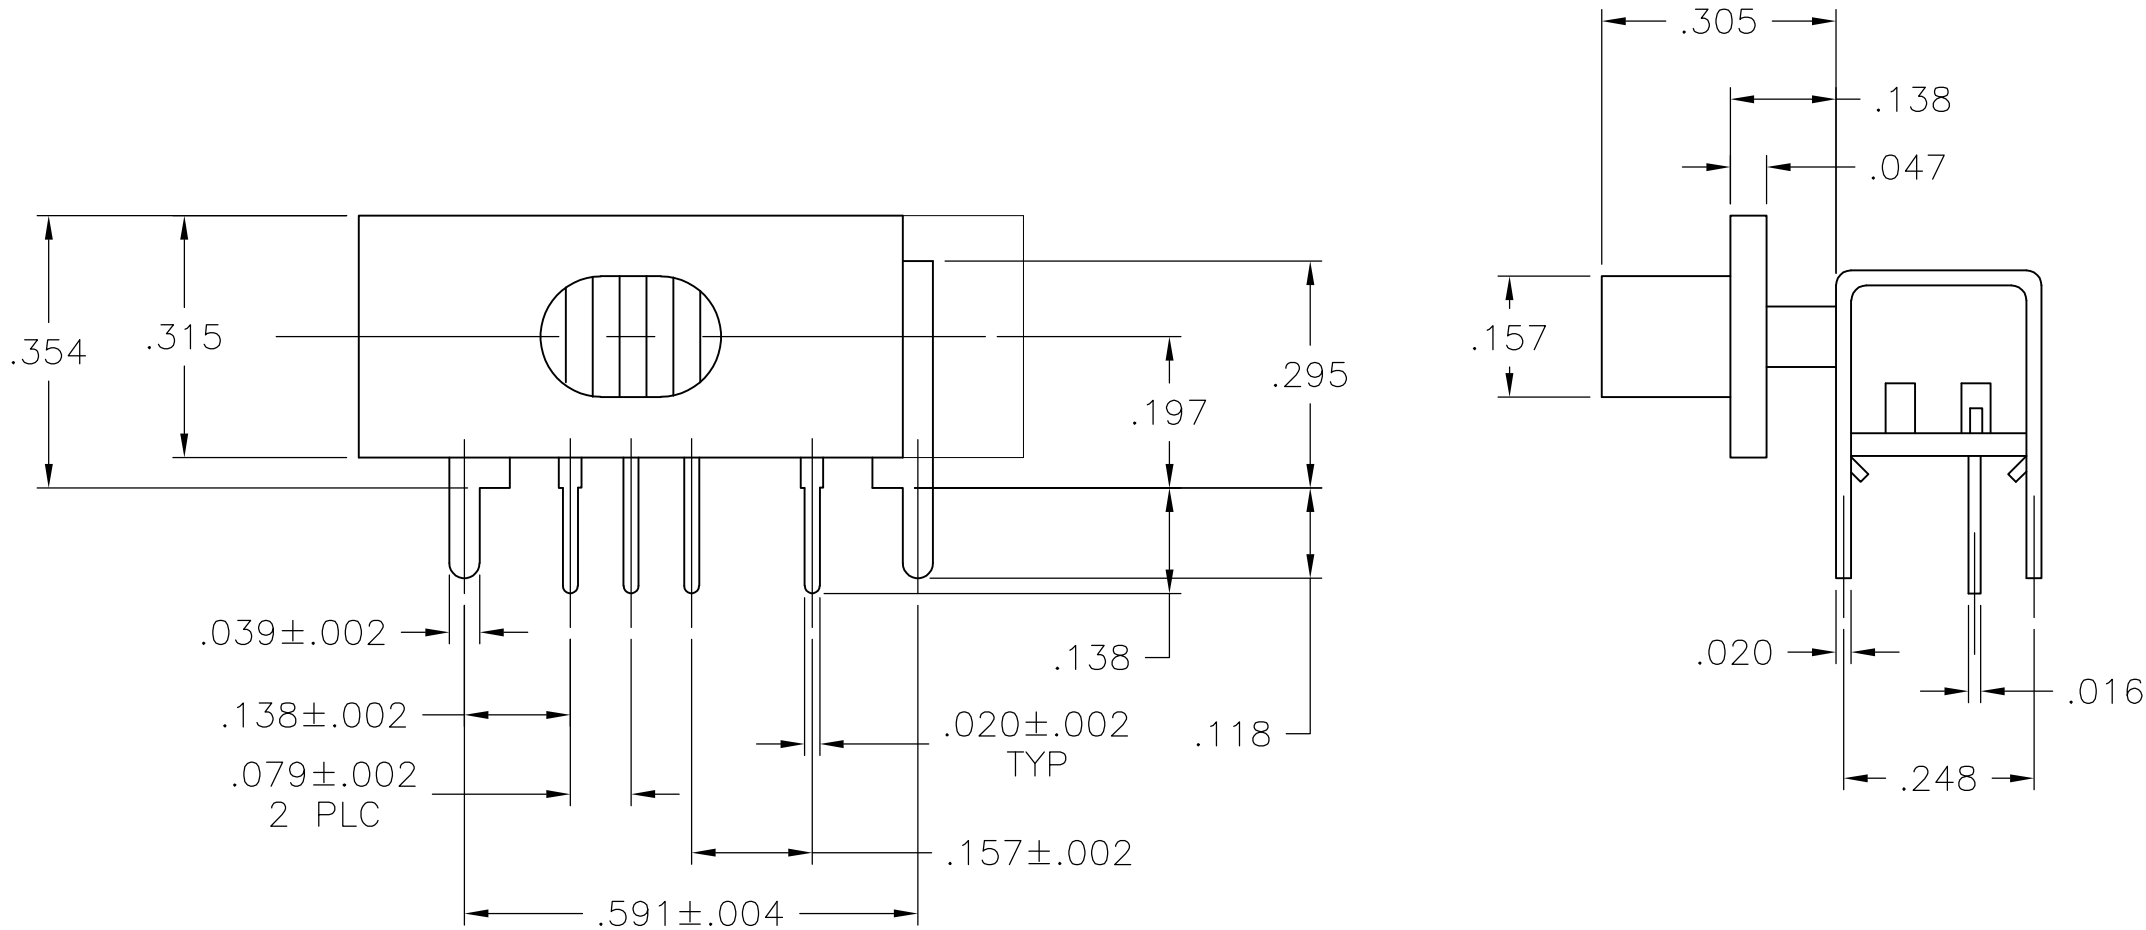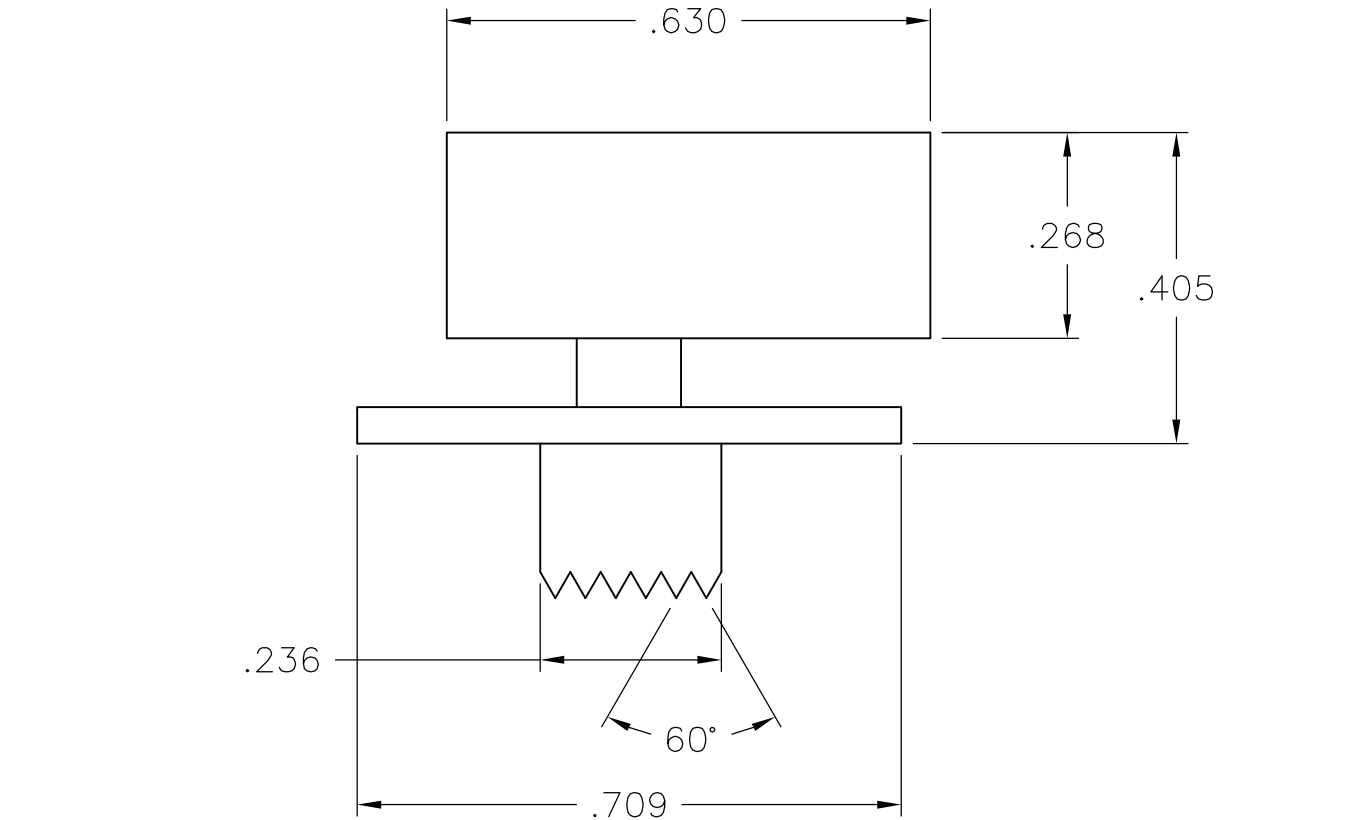

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	.008
4 PLC	±	-
ANGLES	±	1°
FINISH	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S SCHLEGEL

17DEC2007

CHK

M SARVER

12/17/07

APVD

M SARVER

12/17/07

PRODUCT SPEC

-

APPLICATION SPEC

-

WEIGHT

-

CUSTOMER DRAWING

-

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME

SDS1340RAX, SLIDE SWITCH

SIZE

A2

CAGE CODE

00779

DRAWING NO

1437577-4

RESTRICTED TO

-

SCALE

4:1

SHEET

1 of 1

REV

A

GRAY	SDS1340RA8	1437577-5
BLACK	SDS1340RA0	1437577-4
COLOR	CATALOG NUMBER	PART NUMBER