

NOTES:


- 1.0 ELECTRICAL SPECIFICATIONS
- 1.1 FREQUENCY RANGE: 0.3 to 12.4 GHz

1.2 VSWR: 1.10:1 MAX.

1.3 POWER HANDLING: 1 WATT AVG.
500 WATTS PEAK

1.3.1 AVERAGE INPUT POWER IS DERATED
LINEARLY FROM 100% AT +25°C TO 10%
AT SPECIFIED MAXIMUM AMBIENT OPERATING
TEMPERATURE.

1.4 OPERATING TEMP. RANGE:
−55°C to +125°C
- 2.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.
- 3.0 WEIGHT: 3.0 Oz. MAX.

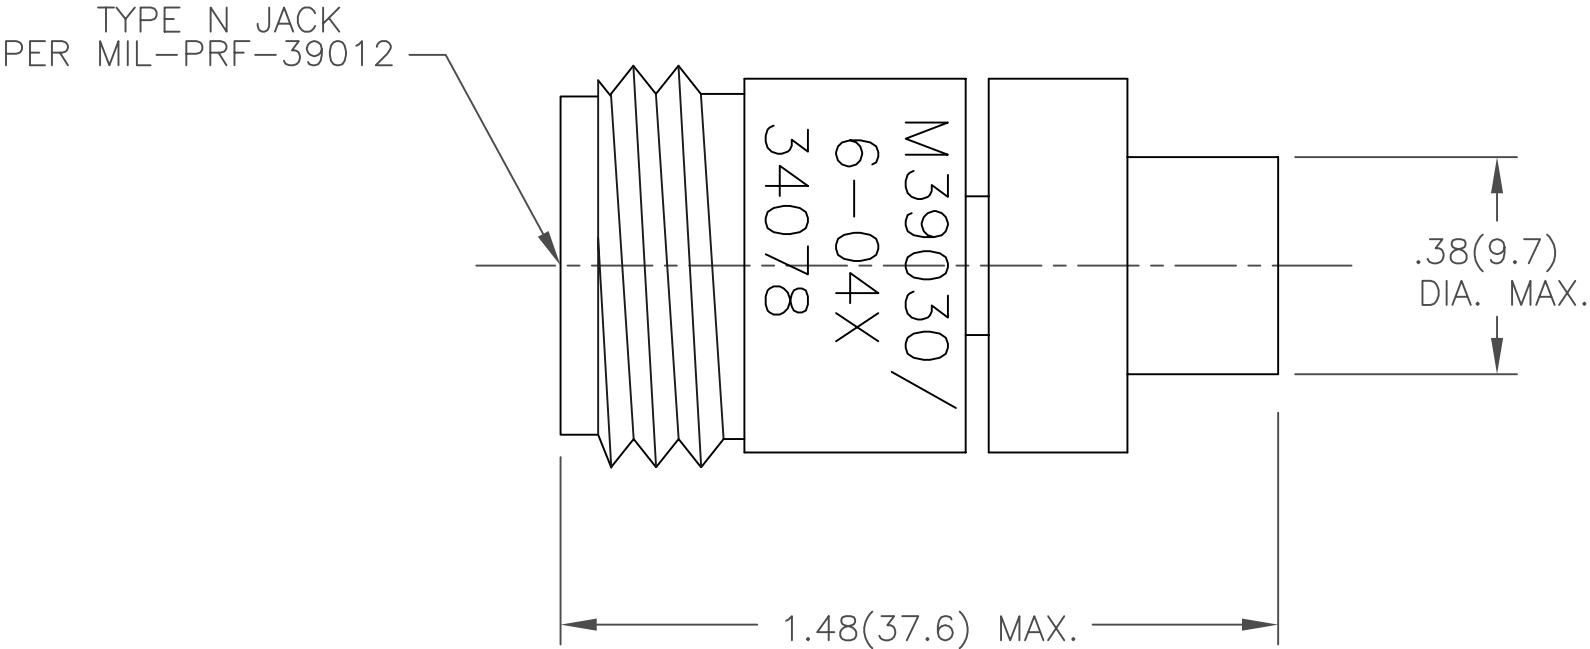

MODEL NUMBER
M39030/6-04(N OR S)

REV.	DESCRIPTION	DATE
-	RELEASED	5/2/94
A	ECN 15080	2/14/96
A1	ADDED TITLEBLOCK	7/7/05
F1	ECO 23014	12/15/10

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.		CAGE CODE 34078		MIDWEST MICROWAVE	
		 EMERSON Network Power Connectivity Solutions		TITLE TERMINATION OUTLINE DRAWING	
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1°		DRAWN/DATE A.BEATTY 4/29/94	ENG./DATE G.KOZAK 5/2/94	DRAWING NUMBER M39030/6-04(N OR S)-01	
		CHECKED/DATE M.HOLLMAN 5/2/94	APPROVED/DATE	SCALE: 3=1	REV. F1
		SHEET 1 of 1			