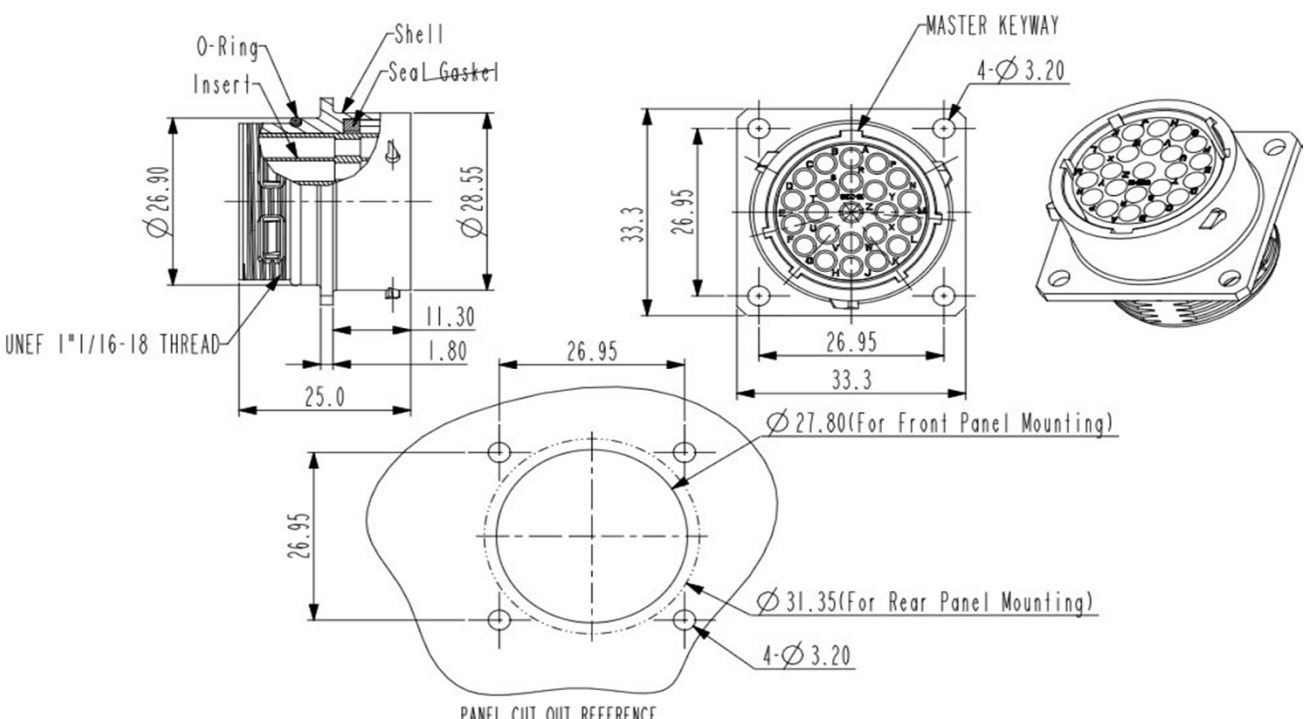


CONFIGURATION		PART NUMBER
Female Receptacle, 23 Pin, 16 Awg, Shell 18		RT001823SNH
DIMENSIONS		
 The technical drawing includes three views of the connector: a side view, a front view, and a rear view. The side view shows the O-Ring, Insert, Shell, and Seal Gasket. Dimensions include a shell diameter of 26.90, an insert diameter of 28.55, a shell thickness of 11.30, and a shell to insert distance of 1.80. The front view shows a 26.95 diameter with 4 mounting holes of 3.20 diameter. The rear view shows a 31.35 diameter with 4 mounting holes of 3.20 diameter. A panel cut out reference is also shown.		
TECHNICAL DATA		
TEMPERATURE RANGE:	-40°C to + 105°C	
PROTECTION:	IP67 in mated condition and in combination with sealed backshell	
VOLTAGE RATING:	250V	
HOUSING BODY:	Zinc Alloy, Nickel Plated	
COUPLING NUT:	-	
INSERT:	Glass-filled Thermoplastic UL94-V0	
SEAL:	NBR	
CURRENT:	13A	
CONTACT SIZE:	16Awg	
APPROVALS:	UL ECBT2	