
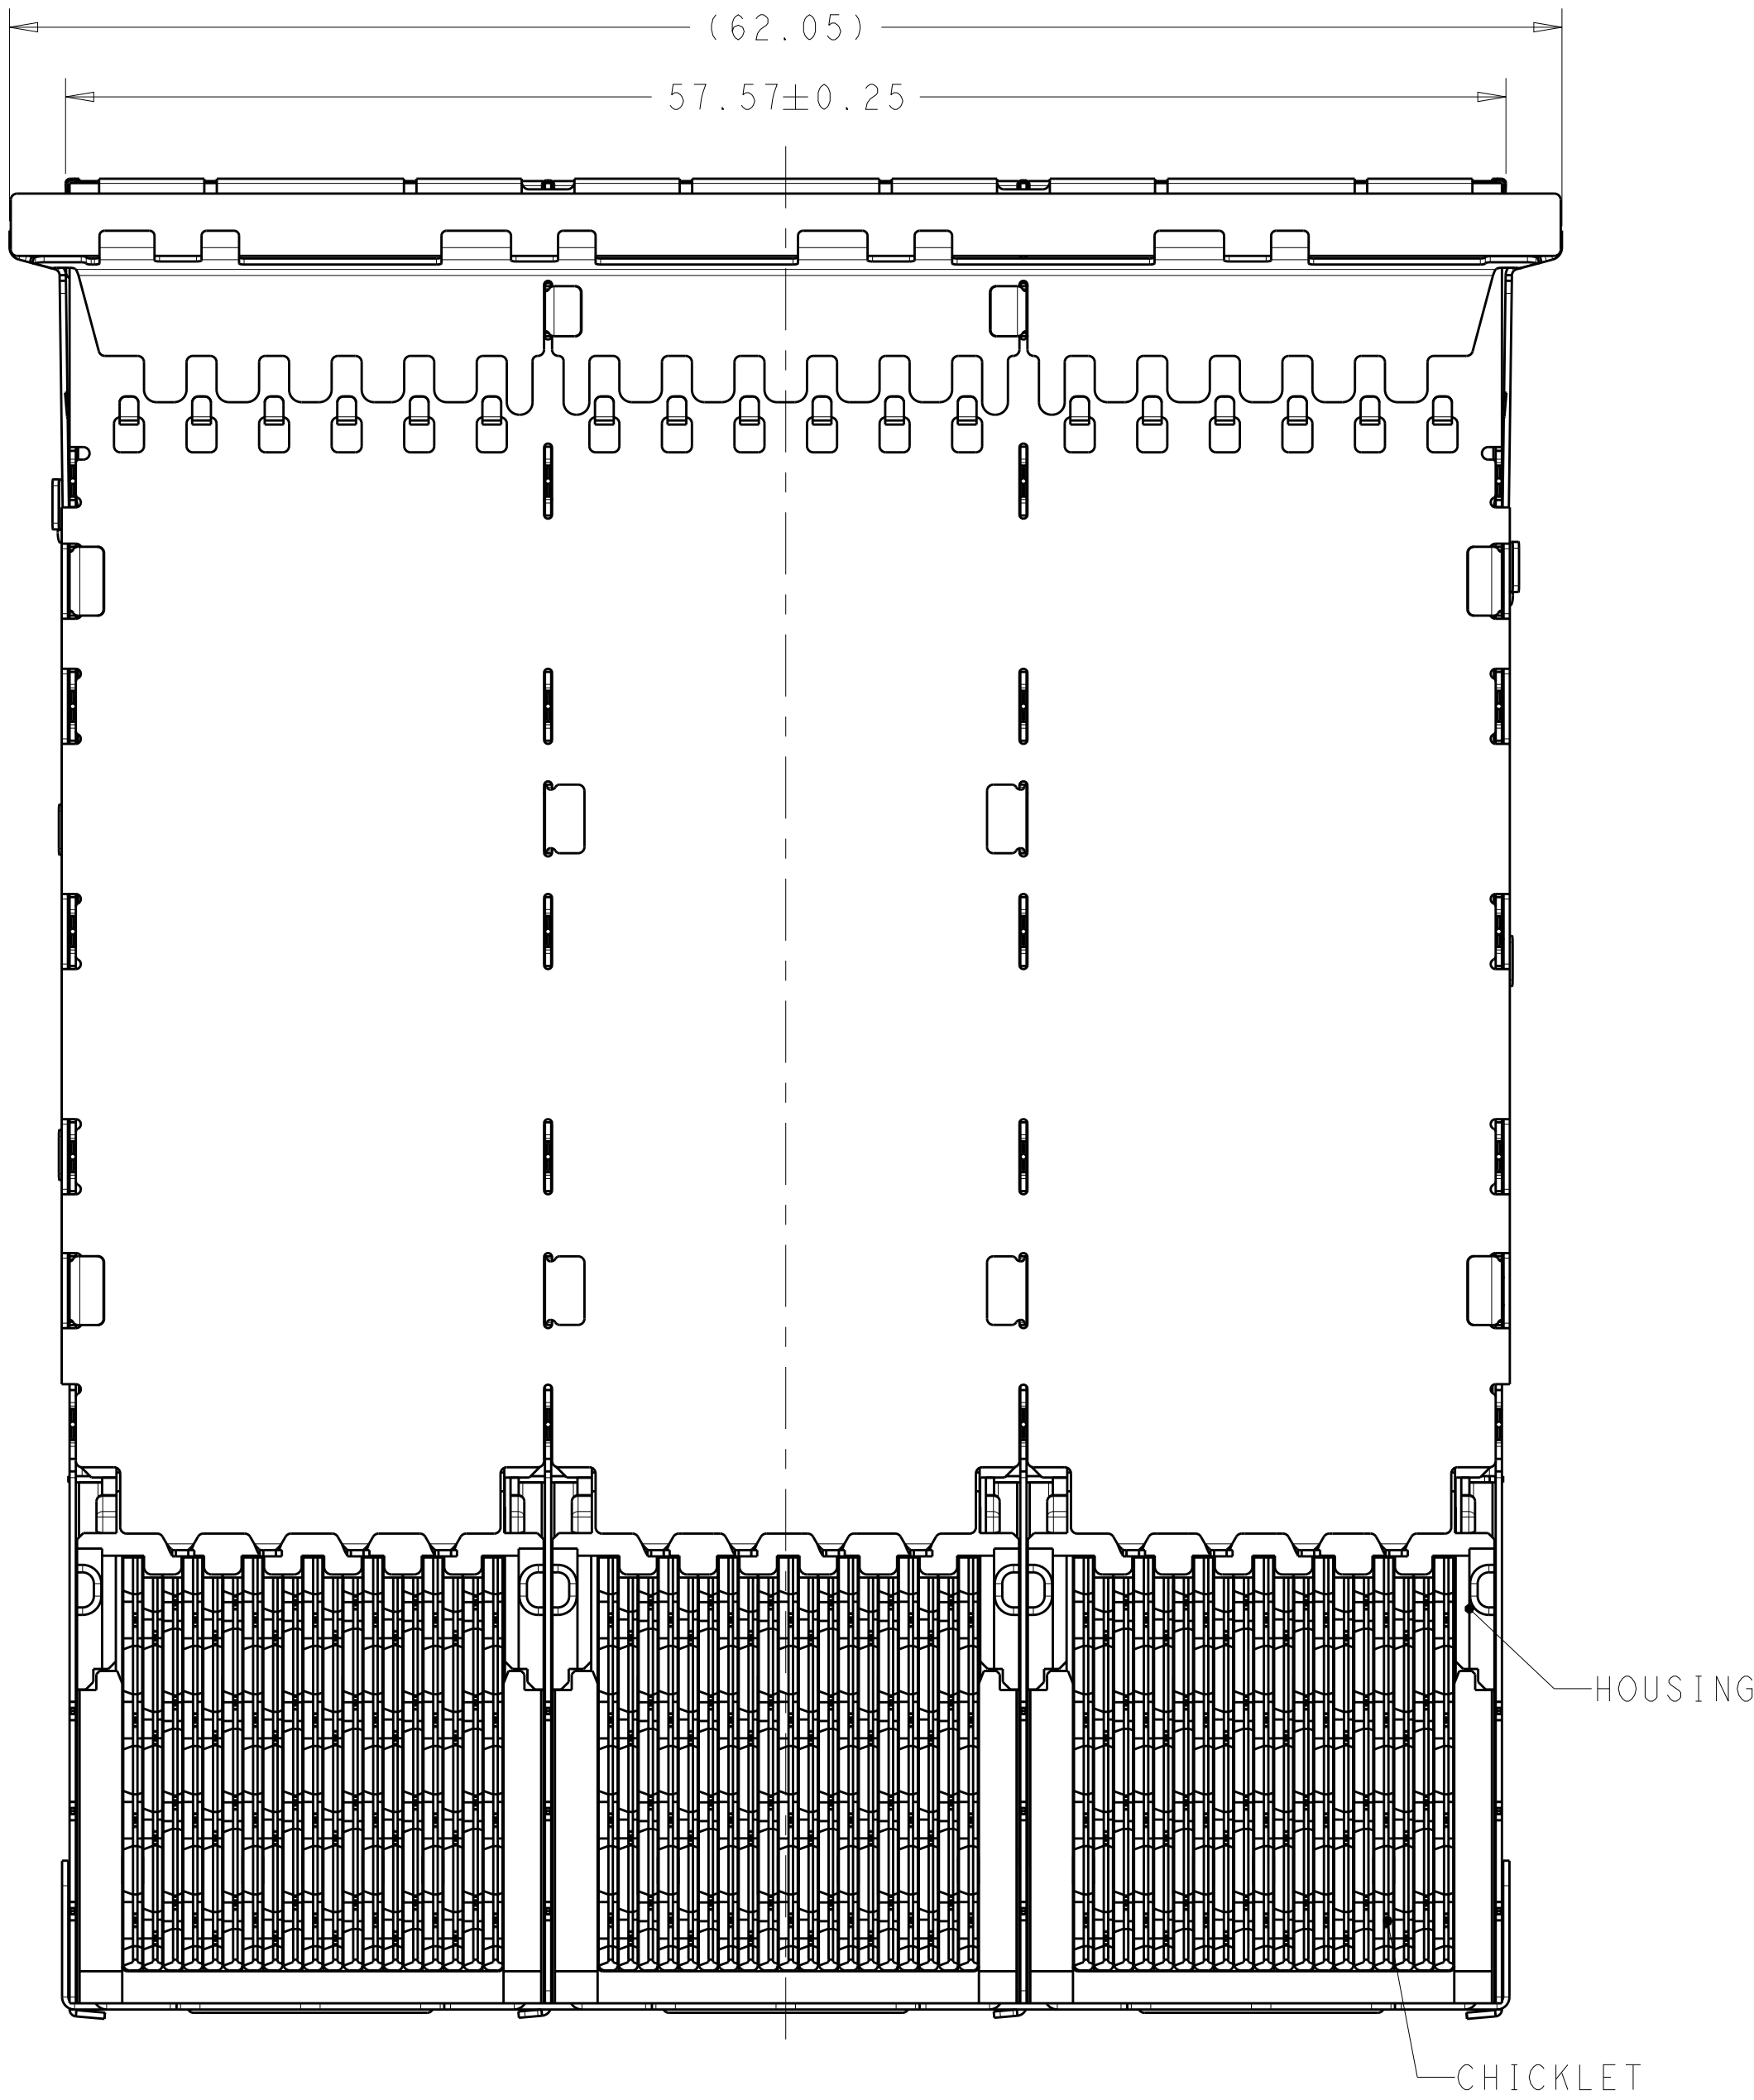
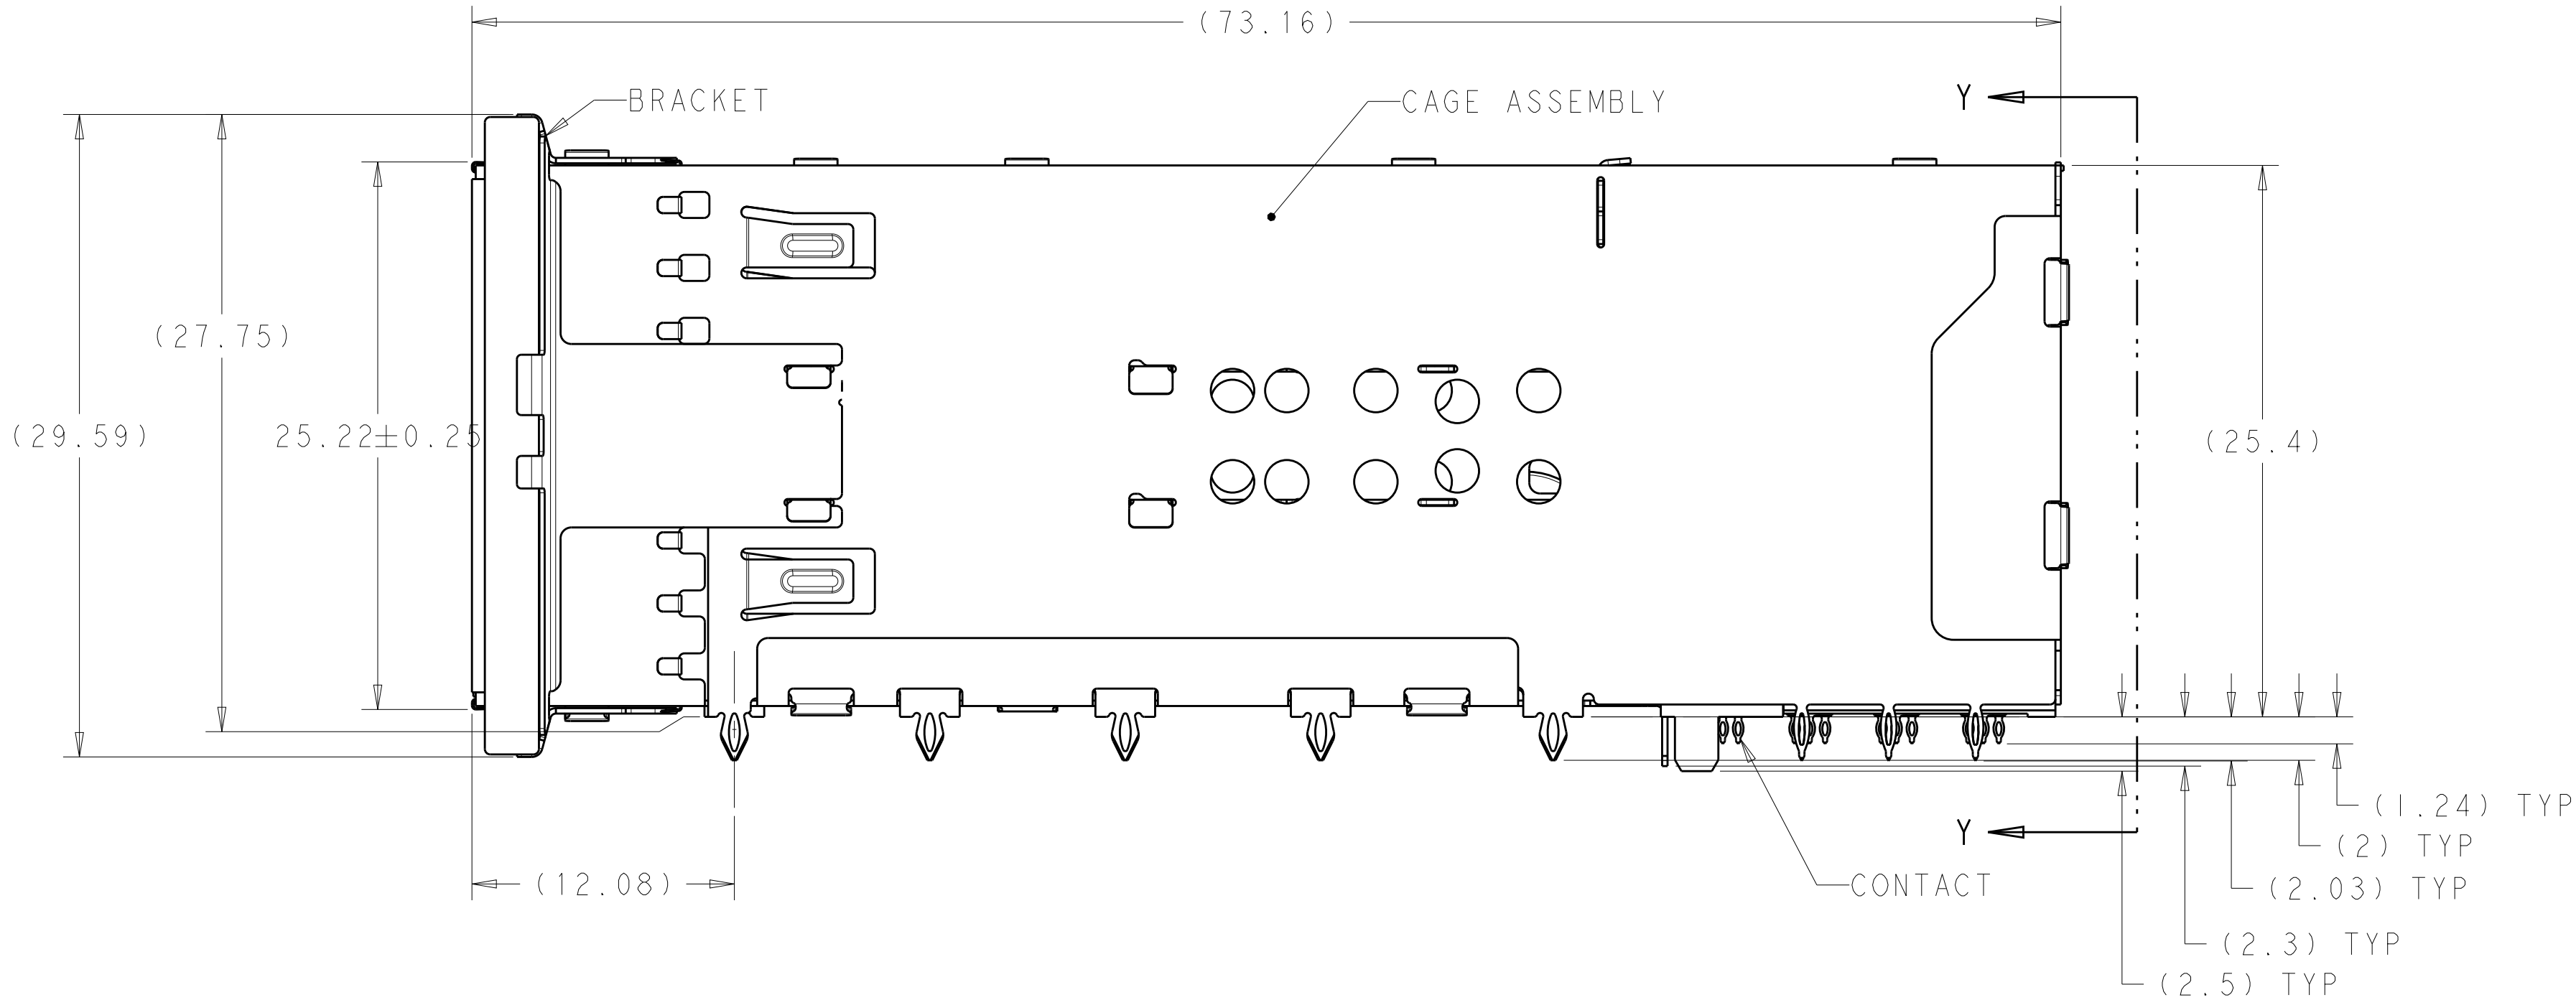



LOC	DIST	REVISIONS					
GP	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	RELEASED FOR PRODUCTION	02MAR2016	TX	SH

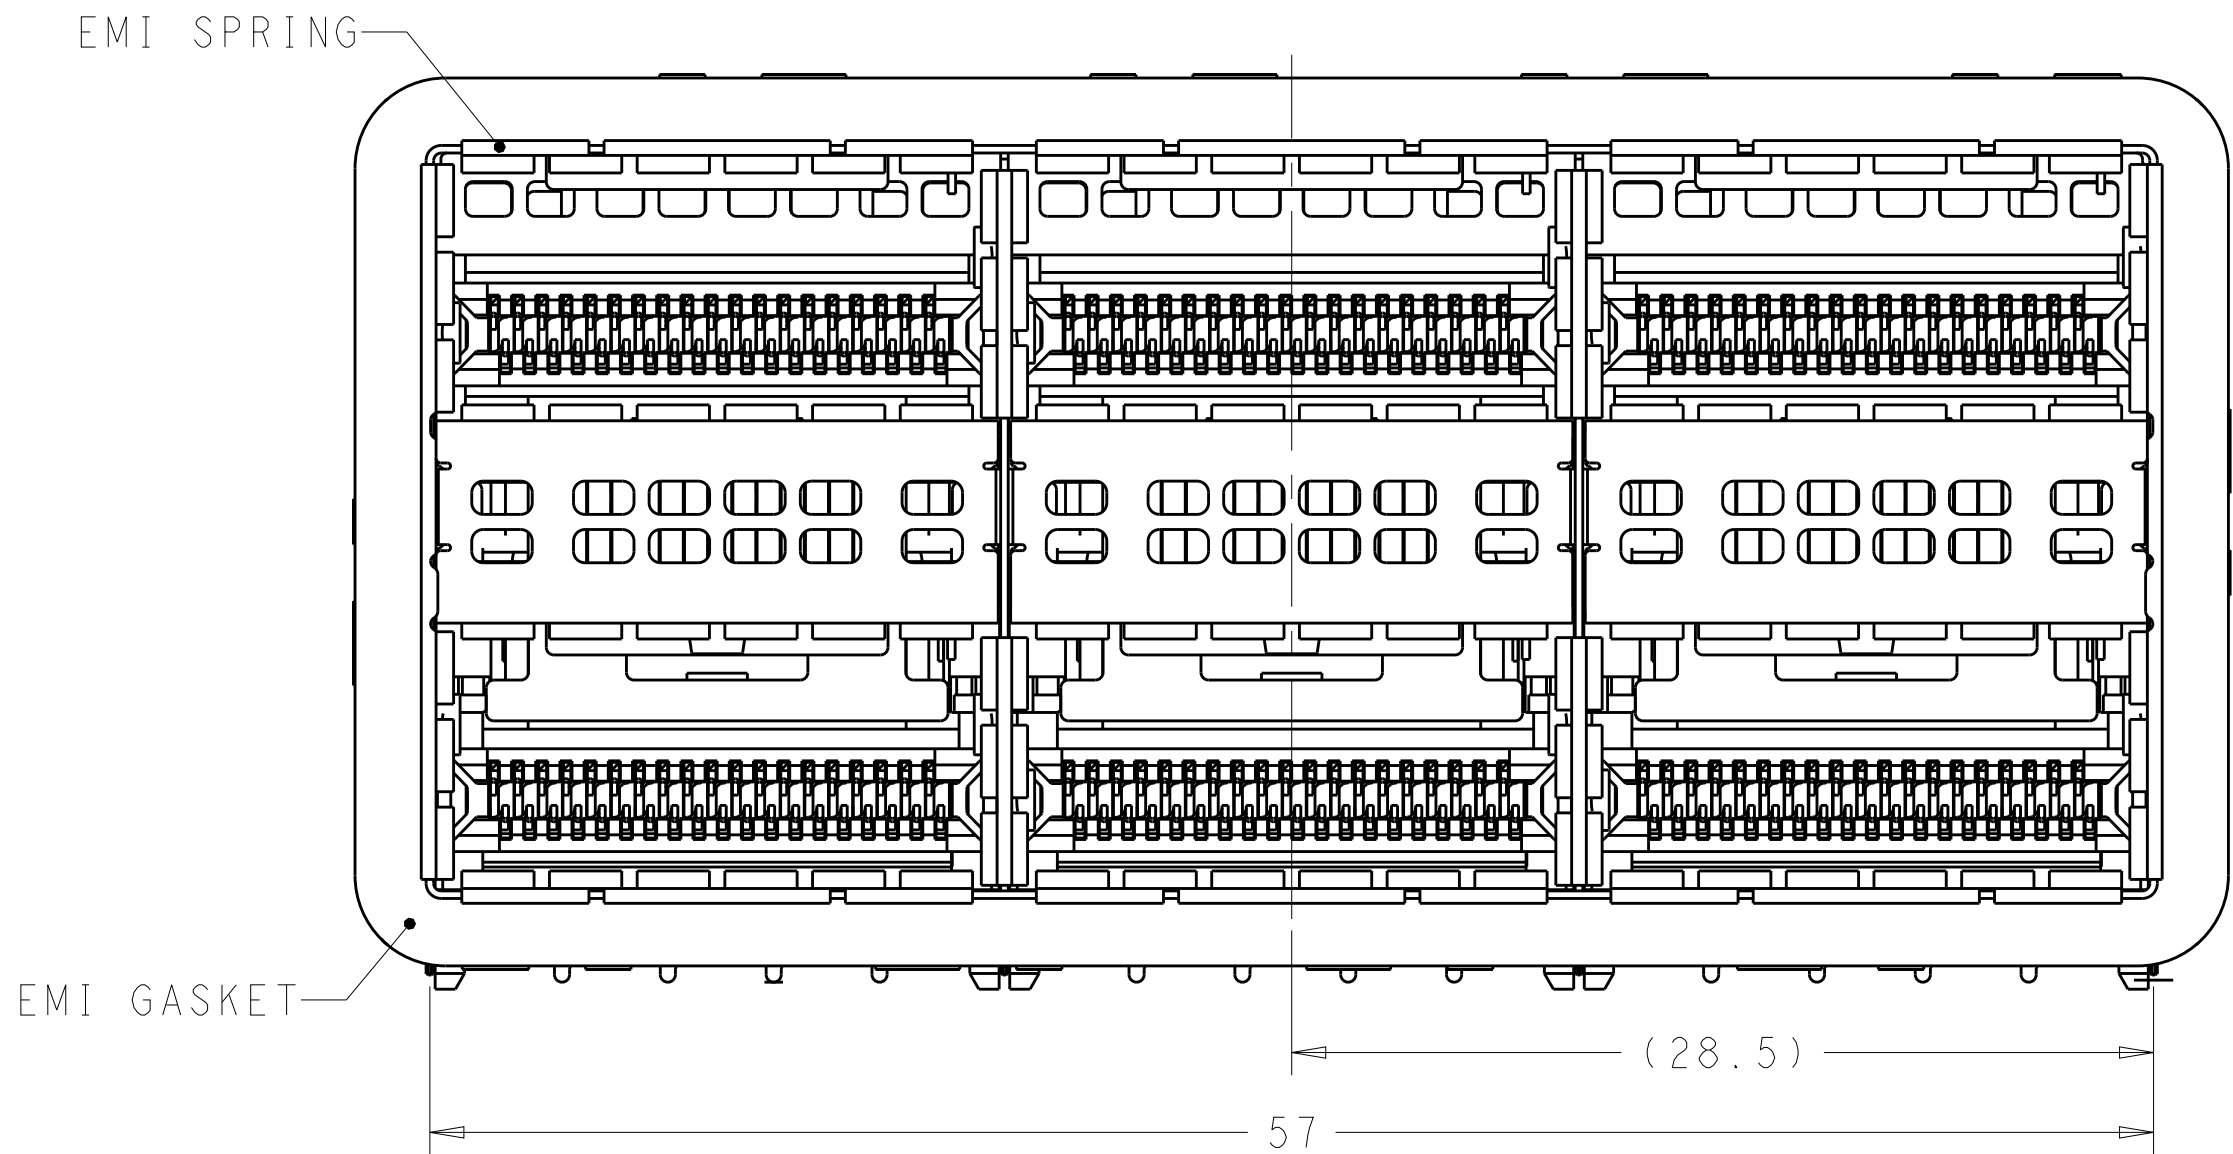

- MATERIALS:
CAGE ASSEMBLY- NICKEL SILVER ALLOY PER ASTM B 122.
BRACKET- NICKEL SILVER ALLOY PER ASTM B 122.
EMI SPRING- COPPER ALLOY, NICKEL PLATED.
EMI GASKET- PLATED FILLED SILICONE.
HOUSING- POLYESTER LCP WITH 94 V-0
CHICKLET- POLYESTER LCP WITH 94 V-0
CONTACT- COPPER ALLOY.
LIGHTPIPE- POLYCARBONATE WITH 94 V-0
- CONTACT FINISH: 0.76µm GOLD ON MATING END, 1.25µm TIN ON SOLDER TAIL, ALL OVER 1.27µm NICKEL.
- DATUM AND BASIC DIMENSION ESTABLISHED BY CUSTOMER.
- MINIMUM PCB THICKNESS OF 1.57.
- THE ENTIRE AREA OF THE CONNECTOR FOOTPRINT, INDICATED BY THE DASHED LINE, TO BE CONSIDERED THE KEEPOUT AREA FOR COMPONENTS.
- CROSS-HATCHED AREAS REPRESENT ZONES ON THE PCB THAT COME IN CONTACT WITH OR BE IN CLOSE PROXIMITY TO THE PLASTIC HOUSING OR THE CONNECTOR CAGE. INDICATED AREAS TO BE CONSIDERED TRACE FREE.
- PART NUMBER AND DATE CODE MAKED IN APPROXIMATE AREA SHOWN.
- THESE HOLES ARE OPTIONAL WHEN PINS ON BACK OF CAGE ARE REMOVED.
- HATCHED AREA IS PLACEMENT ZONE FOR LED. LED SHOULD BE CENTERED WITHIN ZONE. RECOMMEND 0805 PACKAGE.
- CONTACT FINISH: 0.08µm MINIMUM GOLD OVER 0.68µm PALLADIUM-NICKEL ON MATING END, 1.25µm TIN ON SOLDER TAIL, ALL OVER 1.27µm NICKEL.

	LEFT INDICATOR DOWN	2227226-6
	LEFT INDICATOR UP	2227226-5
	NO LIGHTPIPE	2227226-4
	LEFT INDICATOR DOWN	2227226-3
	LEFT INDICATOR UP	2227226-2
	NO LIGHTPIPE	2227226-1
CONTACT FINISH	DESCRIPTION	PART NUMBER


THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER: ASME Y14.5M-2009		DWN: M. SHIRK 01AUG2012 CHK: D. SZCZESNY 01AUG2012 APVD: -	TE Connectivity	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC: 108-60102 APPLICATION SPEC: 114-60015	NAME: CAGE AND CONNECTOR ASSEMBLY, WITH EMI GASKET, 2X3, ZQSFP+ STACKED	
MATERIAL: SEE NOTE 1	SEE NOTE 2	WEIGHT: -	SIZE: A100779	RESTRICTED TO: -
CUSTOMER DRAWING		SCALE: 4:1	SHEET: 1 OF 4	REV: A

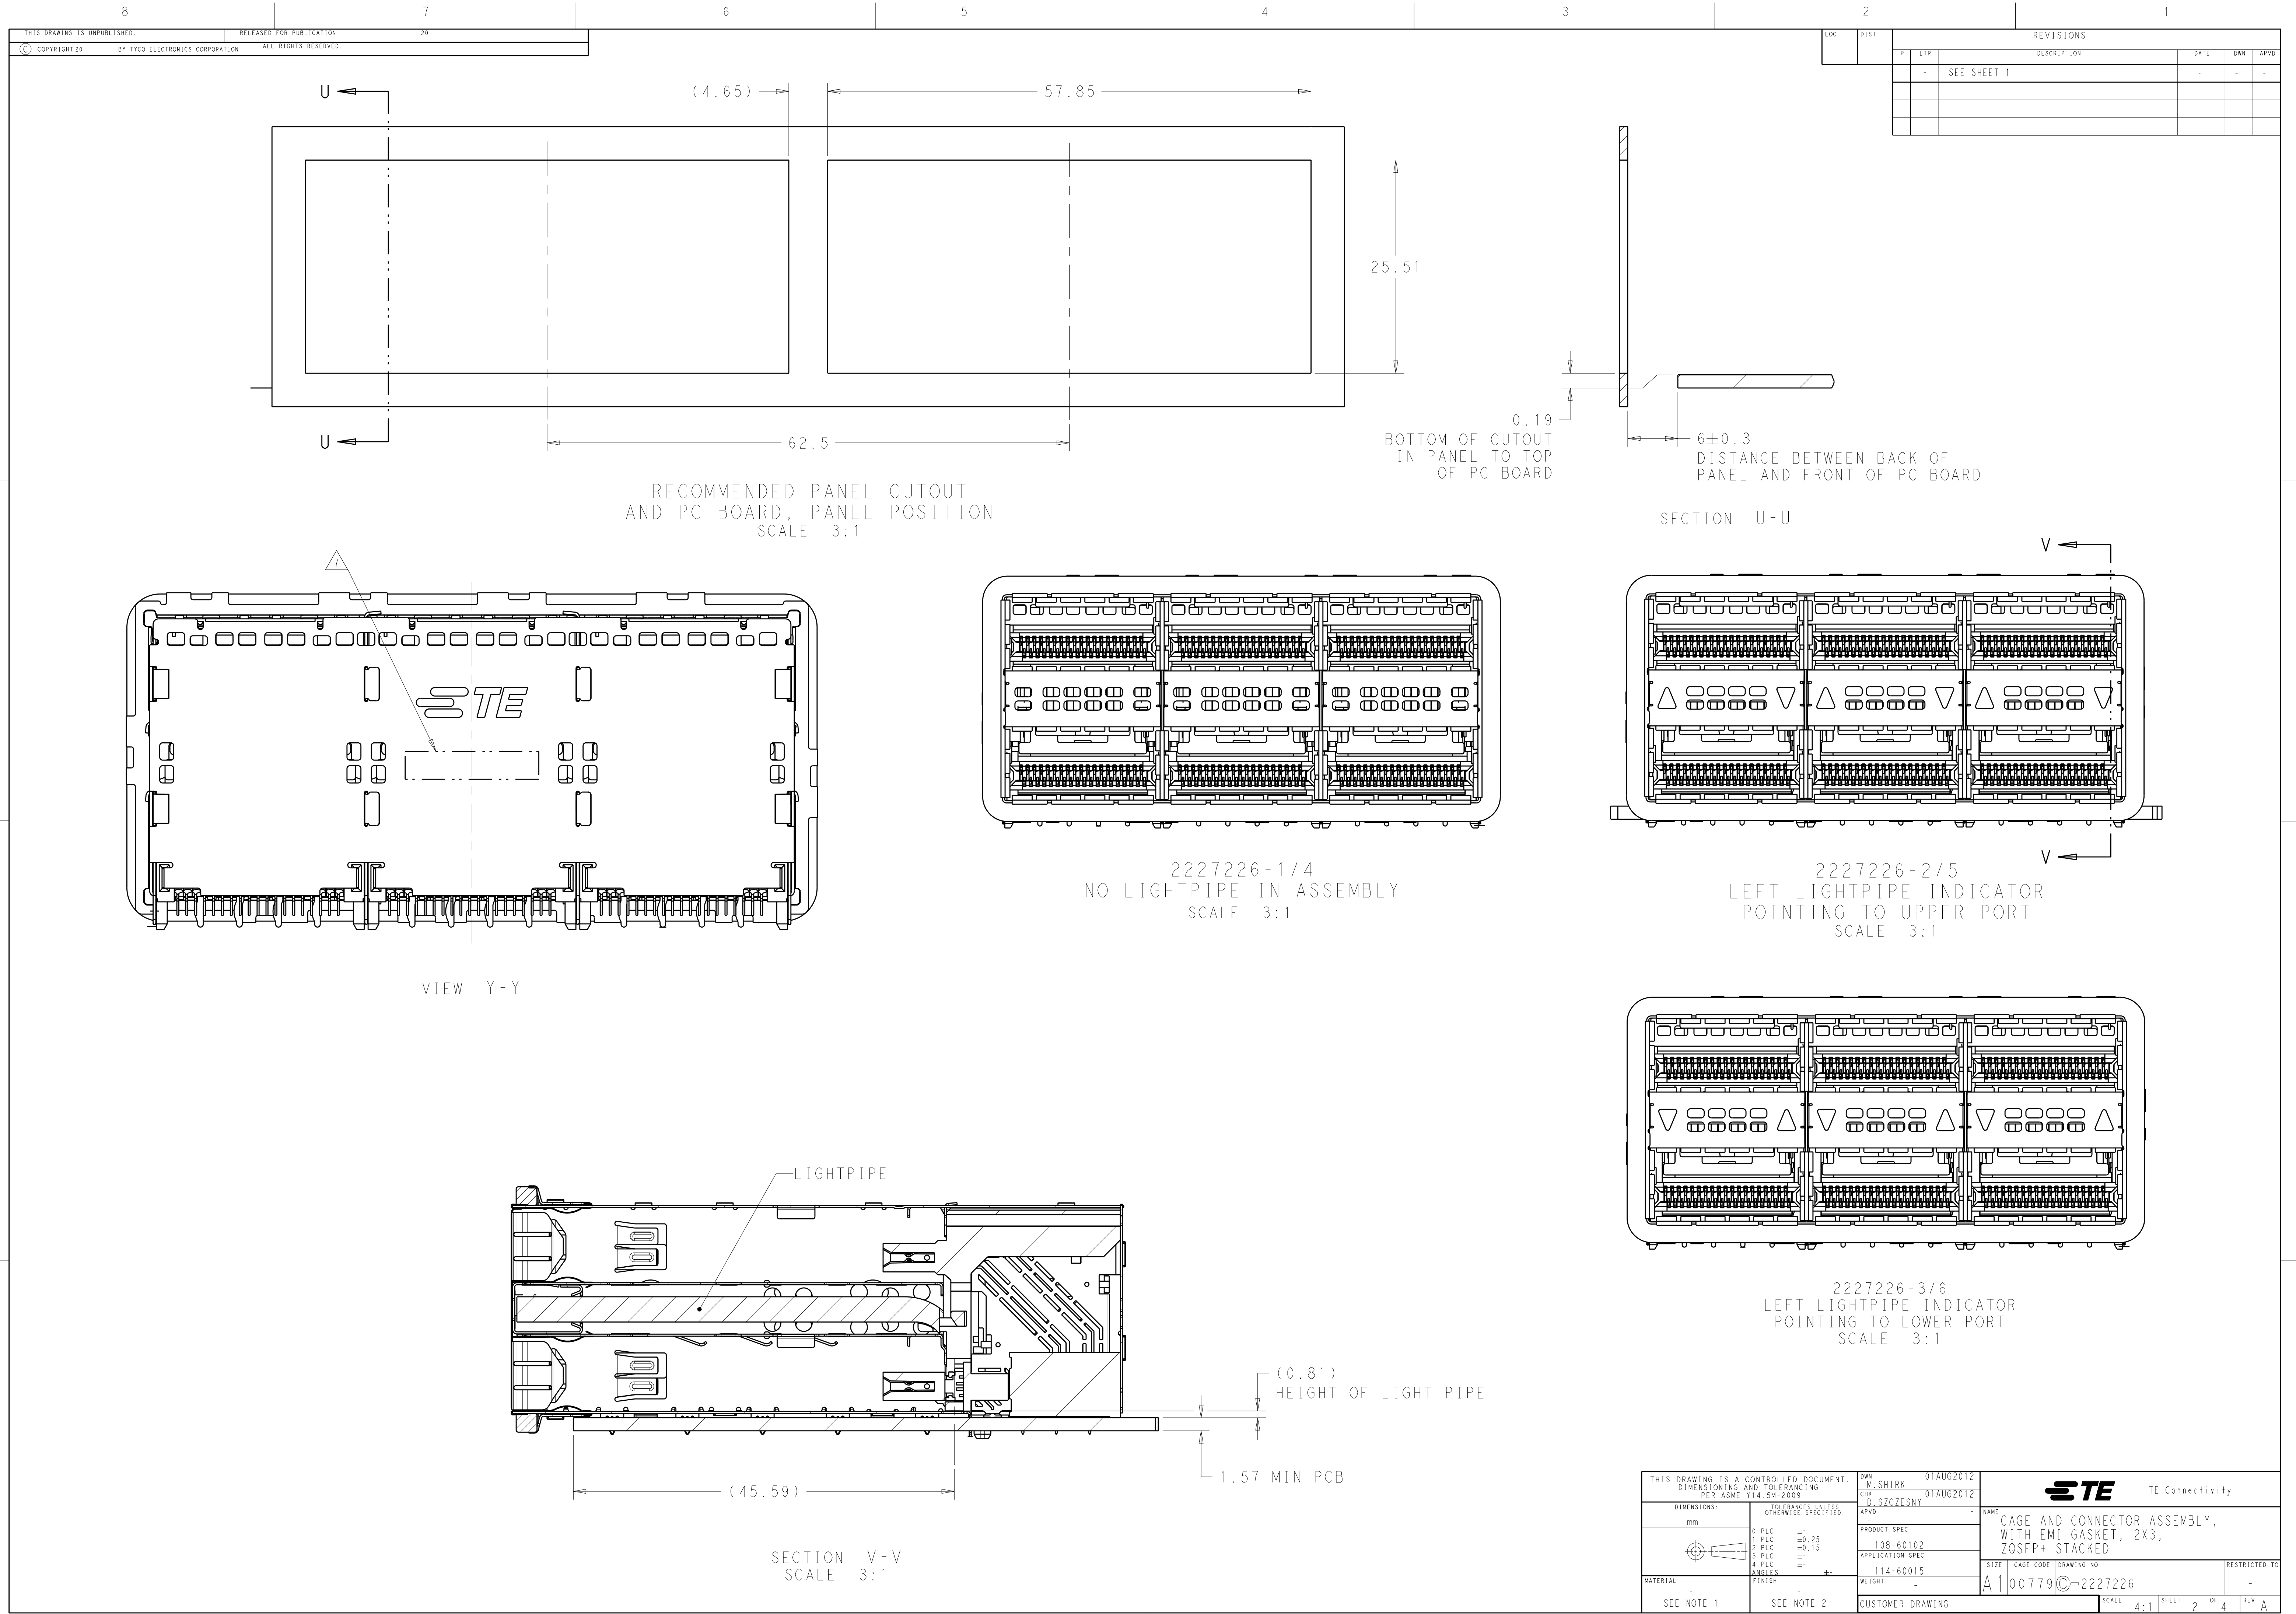


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009.		DWN: M. SHIRK 01AUG2012 CHK: D. SZCZESNY 01AUG2012 APVD: -	TE Connectivity	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC: 108-60102 APPLICATION SPEC: 114-60015	NAME: CAGE AND CONNECTOR ASSEMBLY, WITH EMI GASKET, 2X3, ZQSFP+ STACKED	
MATERIAL: SEE NOTE 1	SEE NOTE 2	WEIGHT: -	SIZE: A100779	RESTRICTED TO: -
CUSTOMER DRAWING		SCALE: 4:1	SHEET: 2 OF 4	REV: A


LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
			-	SEE SHEET 1		-	-	-

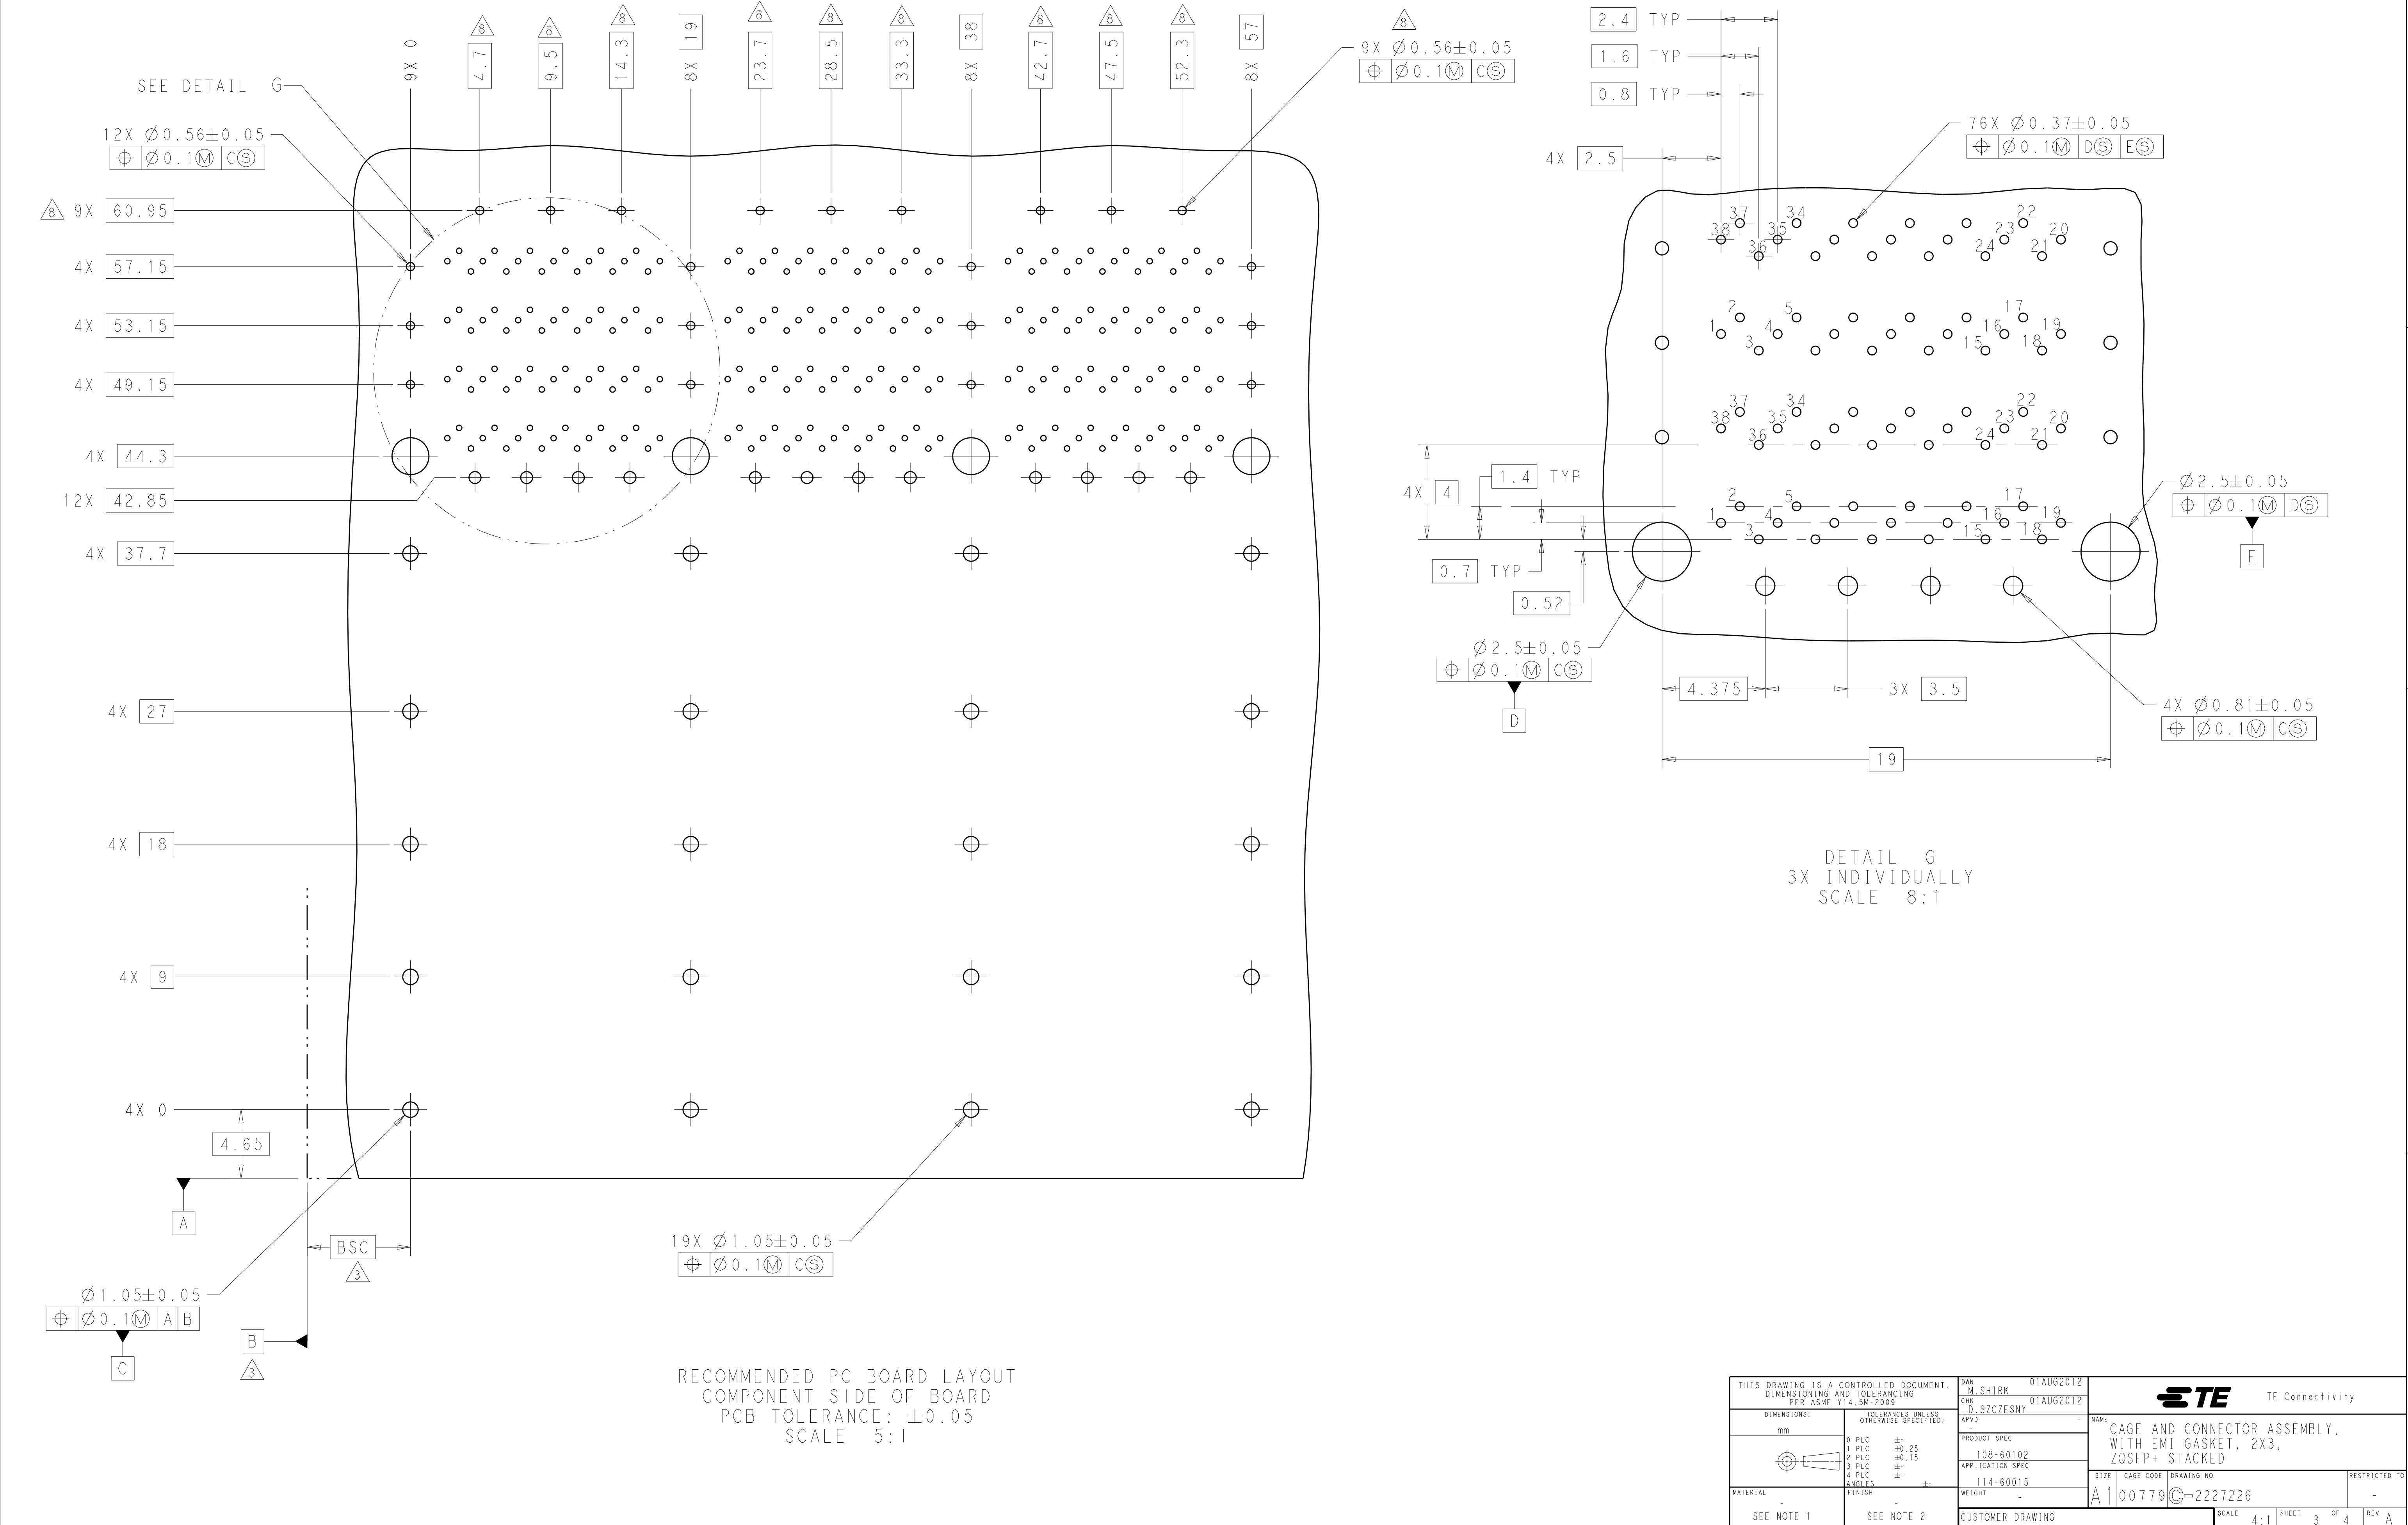


THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009		DWN M. SHIRK 01AUG2012	01AUG2012	NAME	
DIMENSIONS:		CHK D. SZCZESNY	APVD	CAGE AND CONNECTOR ASSEMBLY, WITH EMI GASKET, 2X3, ZQSFP+ STACKED	
mm		PRODUCT SPEC		SIZE	
		108-60102		CAGE CODE	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		DRAWING NO	
0 PLC $\pm$		114-60015		2227226	
1 PLC ± 0.25		WEIGHT		RESTRICTED TO	
2 PLC ± 0.15		CUSTOMER DRAWING		SCALE	
3 PLC $\pm$		4:1		SHEET	
4 PLC $\pm$		3		OF	
ANGLES		4		REV	
FINISH		A		A	
MATERIAL		SEE NOTE 1		SEE NOTE 2	

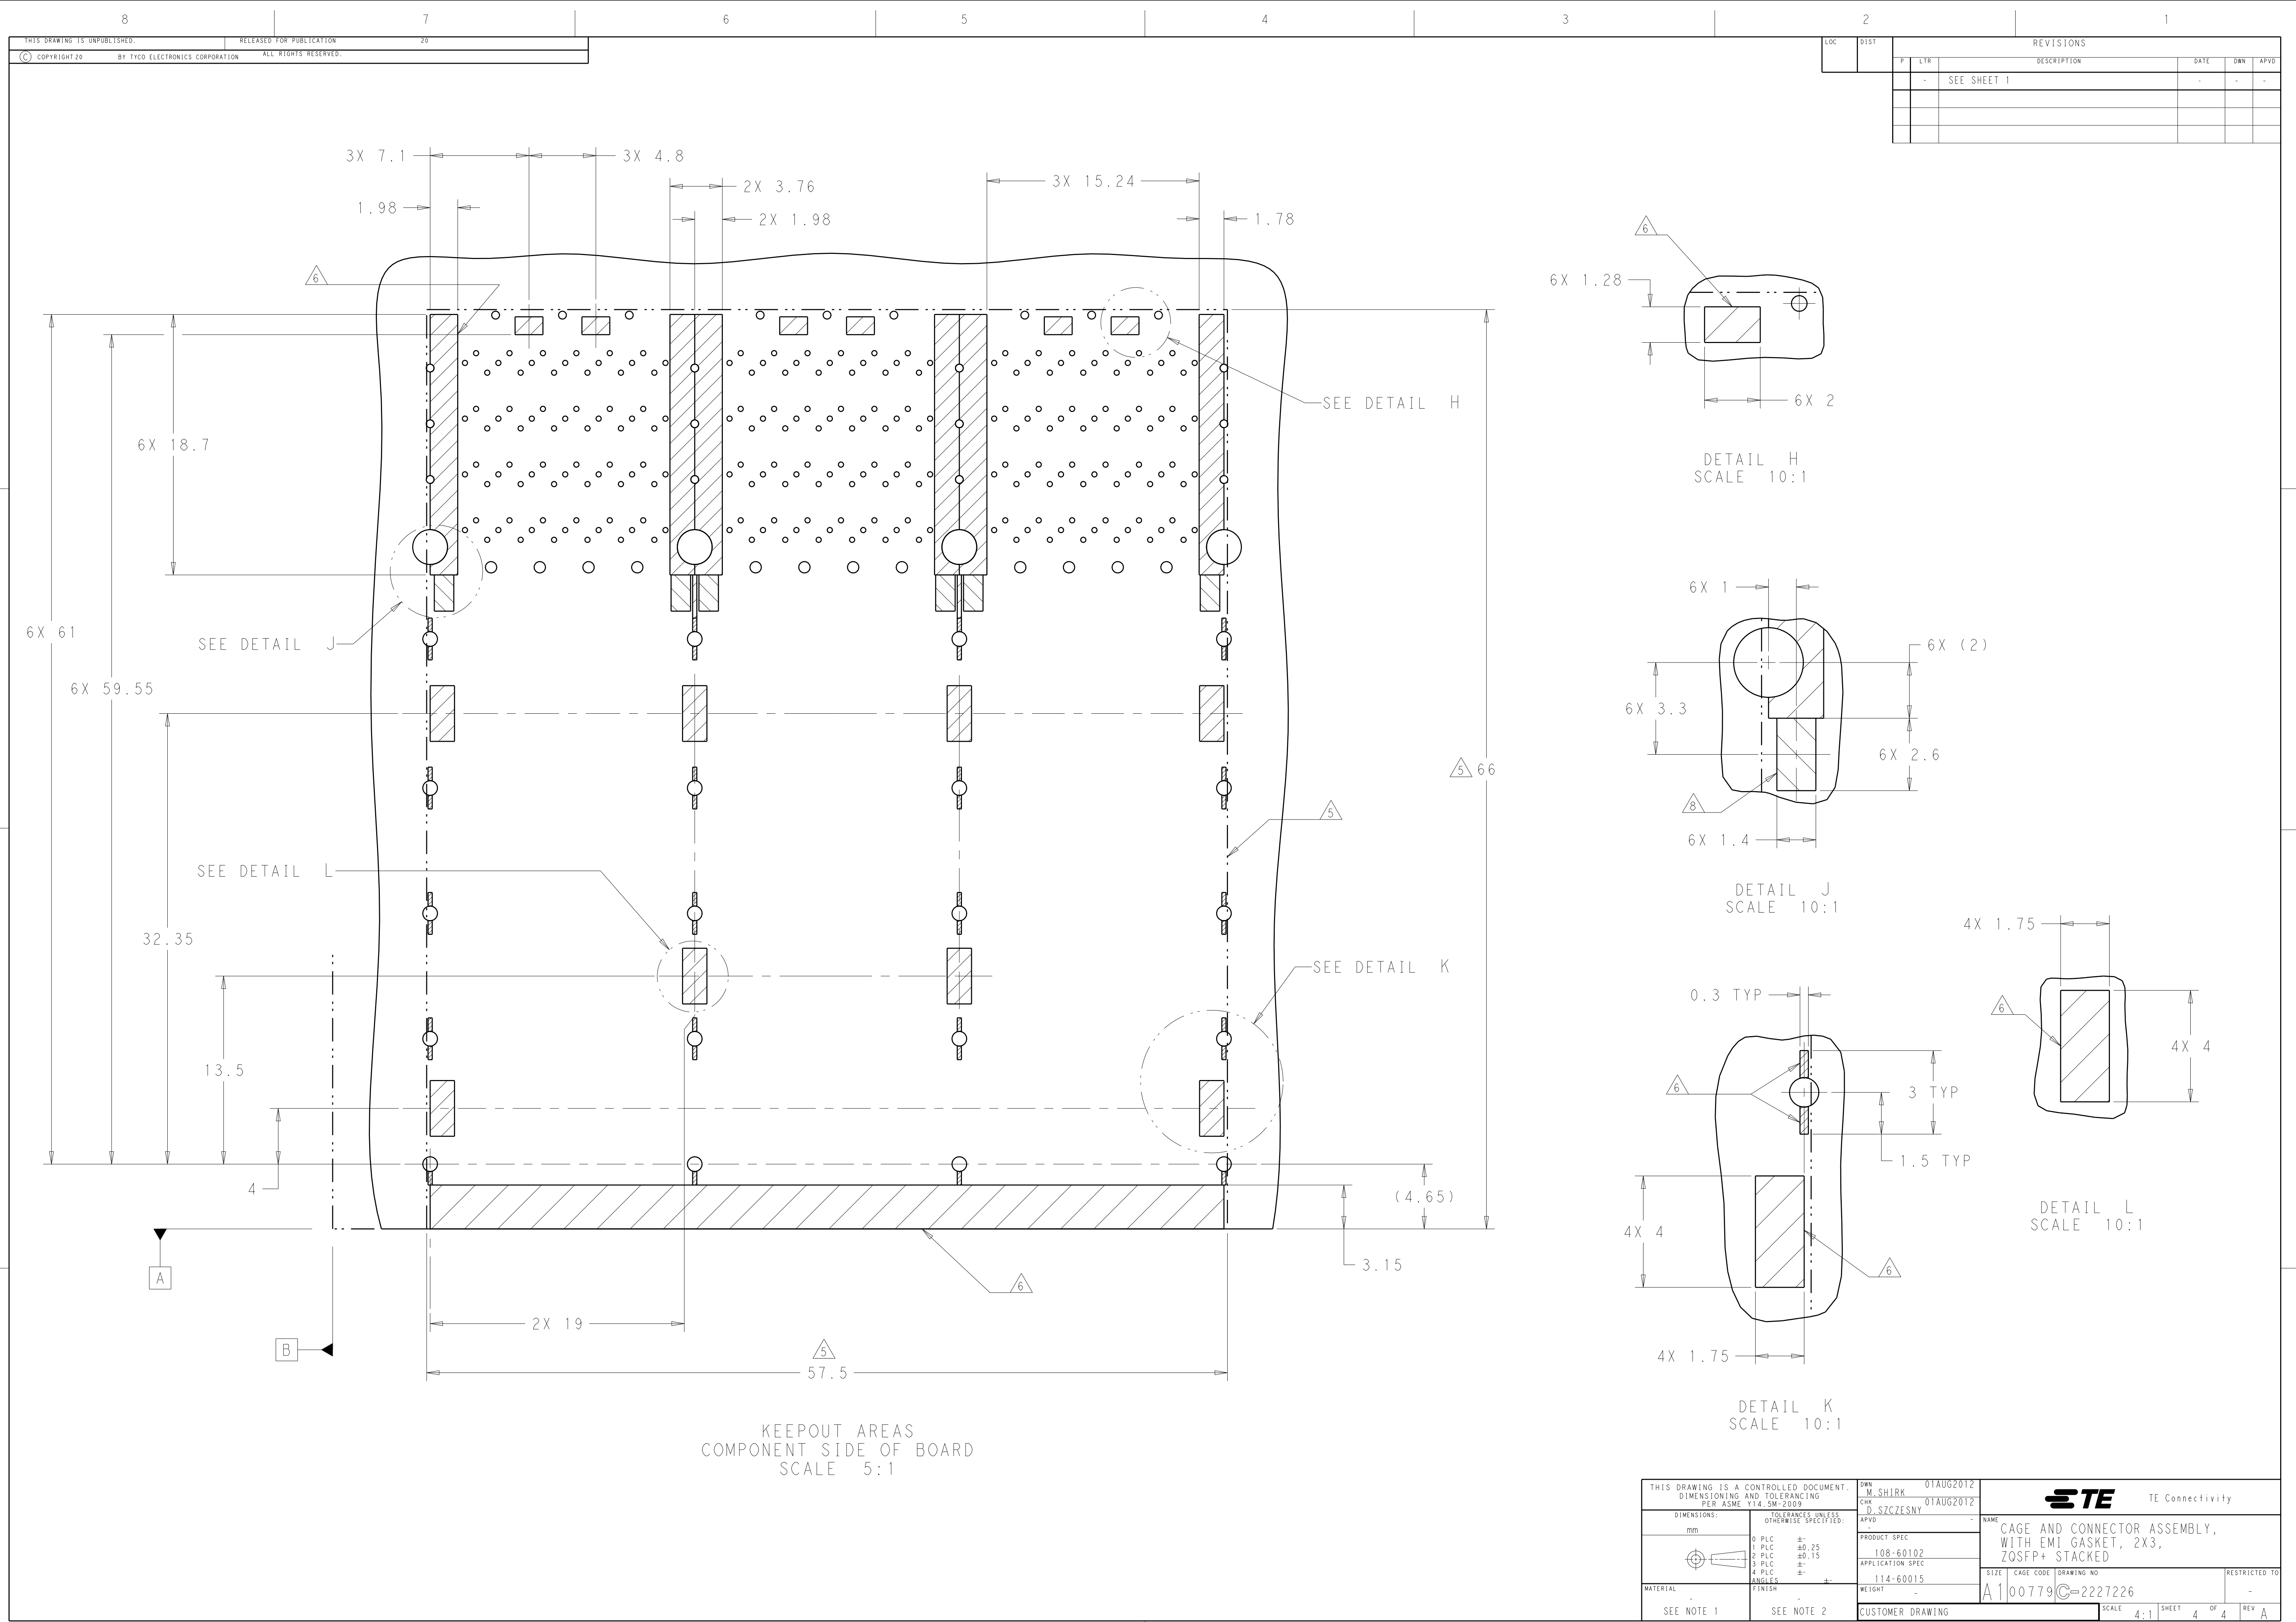


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
-	-	SEE SHEET 1		-	-	-	-

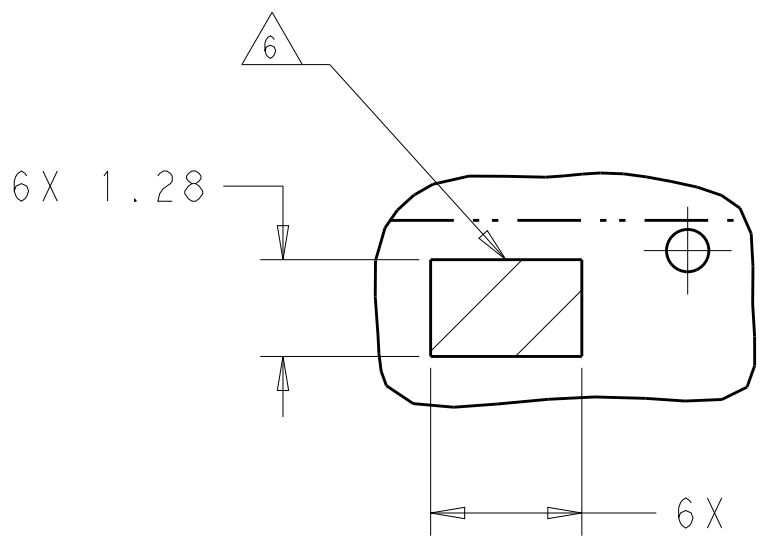


DETAIL H
SCALE 10:1

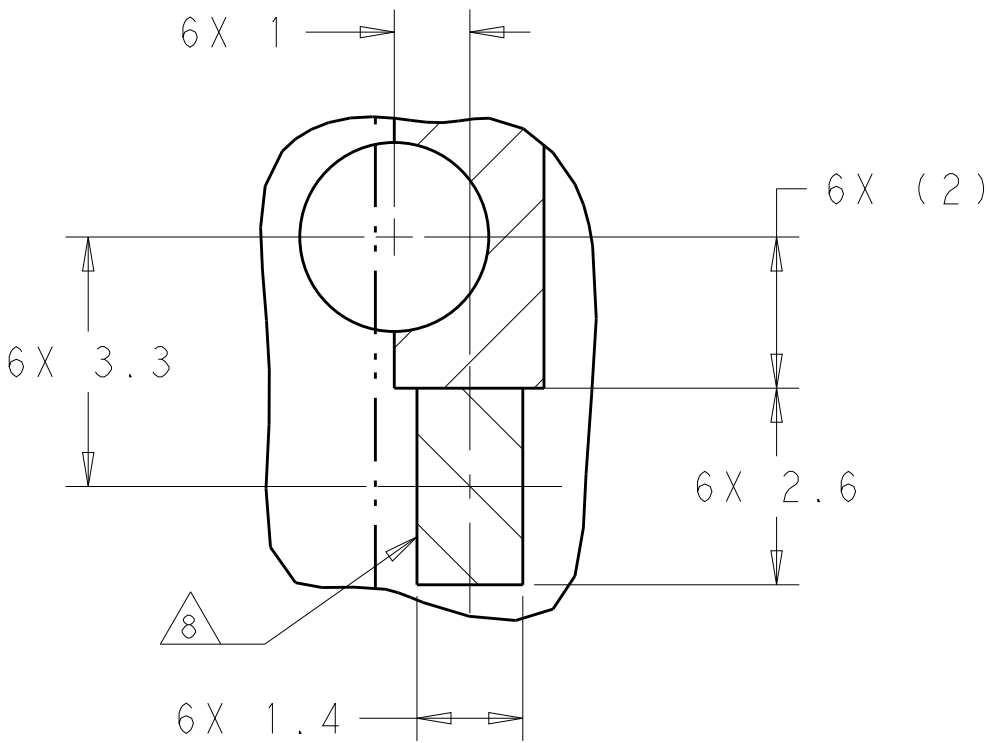

DETAIL J
SCALE 10:1

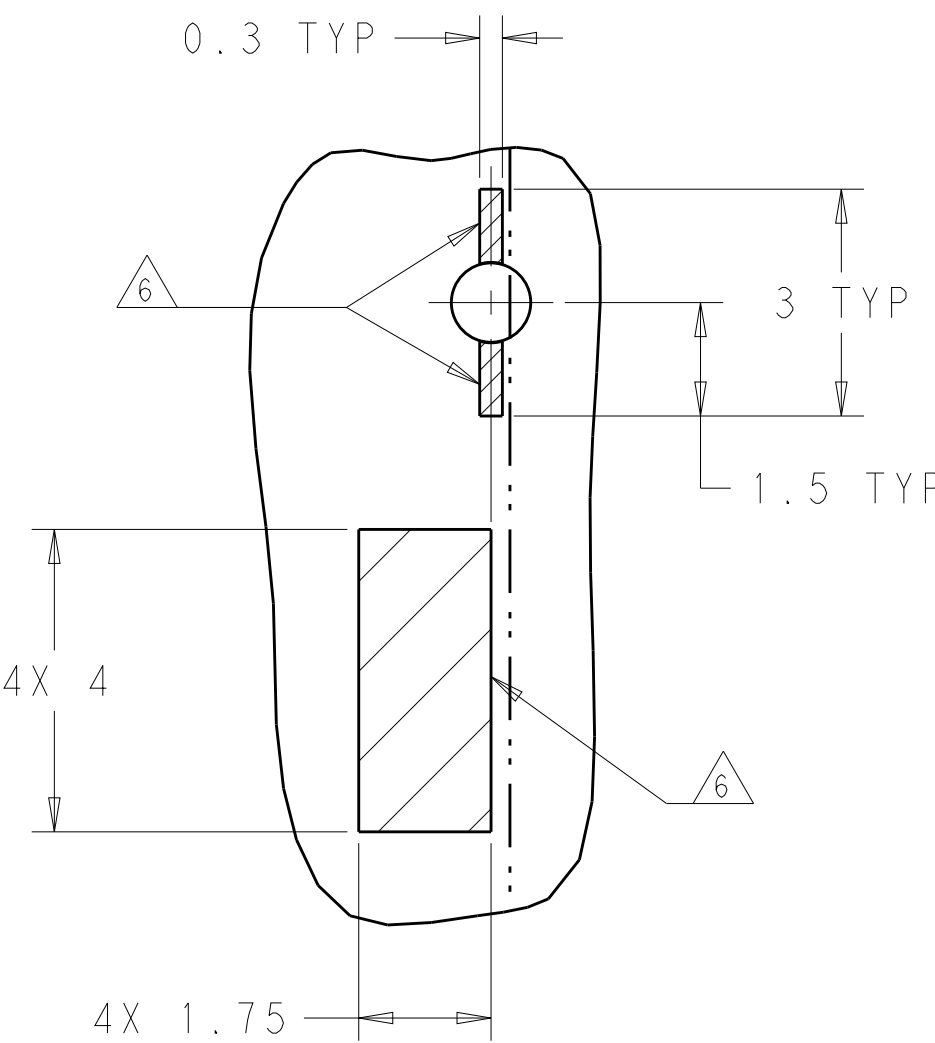

DETAIL K
SCALE 10:1

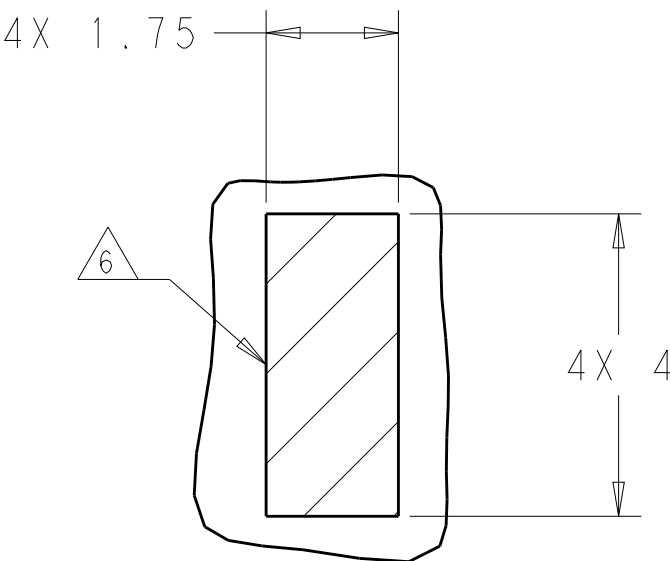

DETAIL L
SCALE 10:1

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER: ASME Y14.5M-2009		DWN: M. SHIRK 01AUG2012 CHK: D. SZCZESNY 01AUG2012 APVD: -	NAME: CAGE AND CONNECTOR ASSEMBLY, WITH EMI GASKET, 2X3, ZQSFP+ STACKED	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±0.25 2 PLC ±0.15 3 PLC ± 4 PLC ± ANGLES ± FINISH	PRODUCT SPEC: 108-60102 APPLICATION SPEC: 114-60015 WEIGHT: -	SIZE: 100779 CAGE CODE: C=2227226	RESTRICTED TO: -
MATERIAL: SEE NOTE 1	SEE NOTE 2	CUSTOMER DRAWING		SCALE: 4:1 SHEET: 4 OF 4 REV: A