





Notes:

1. Material and Finish:

- Coupler Ring: Polyester (Black); UL94 V-0
- Plug Housing: Polyester (Black); UL94 V-0
- Cable Gland: PA (Black), UL94 V-0
- Cable Fitting: PA (Black), UL94 V-0
- Cable Fitting Rubber Ring: NBR, Color: Black
- Interfacial Seal: Silicone, Color: White

Duplex LC Connector

- Housing: PEI, UL94 V-0,
 - (e) (b) Color: **SM Blue/MM Beige/APC SM Green**
 - Ferrule Sub Assembly: Zirconia/Metal
 - Inner Tubing: PTFE
 - Rear Body: Brass, Nickel Plated
 - Dust Cap: PC, Color: White
 - (c) - Duplex LC Clip: PC, Color: Black
 - Crimp Barrel: Brass, Nickel Plated
 - Operating Temperature: -40°C to +85°C
2. IP67 rated when covered or fully mated with the appropriate mating connector
- (d) 3. Accept 4.5mm to 8.0mm outside diameter fiber optic cable
4. RoHS compliant

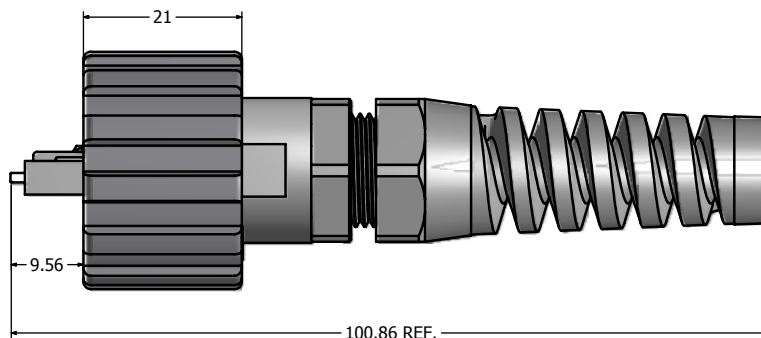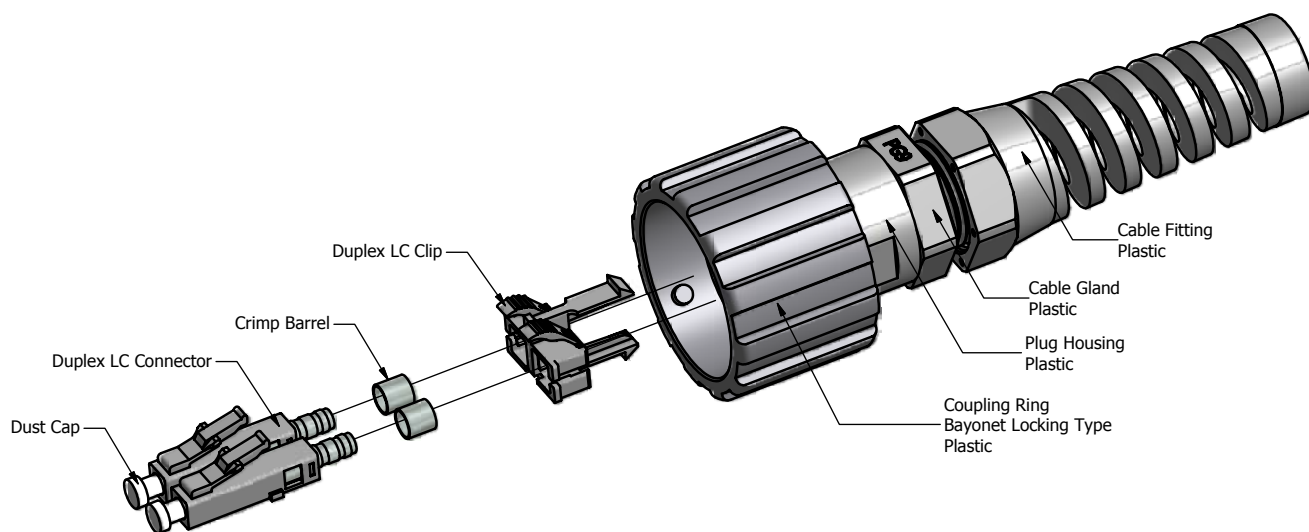

Description	Part Number
Single Mode (SM)	17-300030
Multi Mode (MM)	17-300040
(e) APC Single Mode (APC SM)	17-300110

Directive 2002/95/EC RoHS Compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY. ALL RIGHTS ARE RESERVED AND COPYRIGHT OF CONEC CORPORATION.	Customer:				Tolerance Unless otherwise specified 0 PLC ±0.10 1 PLC ±0.20 2 PLC ±0.10 3 PLC ±0.05 ANGLES ±1°			Scale: 1.5:1		Dim. in mm				
								Material: See Notes						
	Name		Title		Approval Date		Autodesk Inventor		Title: IP67 Industrial Duplex LC Plug Kit Plastic Version					
							2008		Date		Name			
	e		2 x e		Nov/22/10		Vincent Ke		Draw.		Jun. 06		Vincent Ke	
	d		1 x d		Nov/03/10		Vincent Ke		Appd.		Jun. 06		J. Chaudry	
	c		1 x c		Jul/19/10		Vincent Ke		Norm					
	b		1 x b		May/28/09		Vincent Ke		D-old					
	a		original								Drawing No.: 17K1A003		DIN A3	
	Rev.		Changes		Date		Name				Part No.: SEE P/N ABOVE		Sheet 1/1	