

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT — BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		C	ECR-07-025227	25OCT2007	RC	TvdM

D

C

B


A

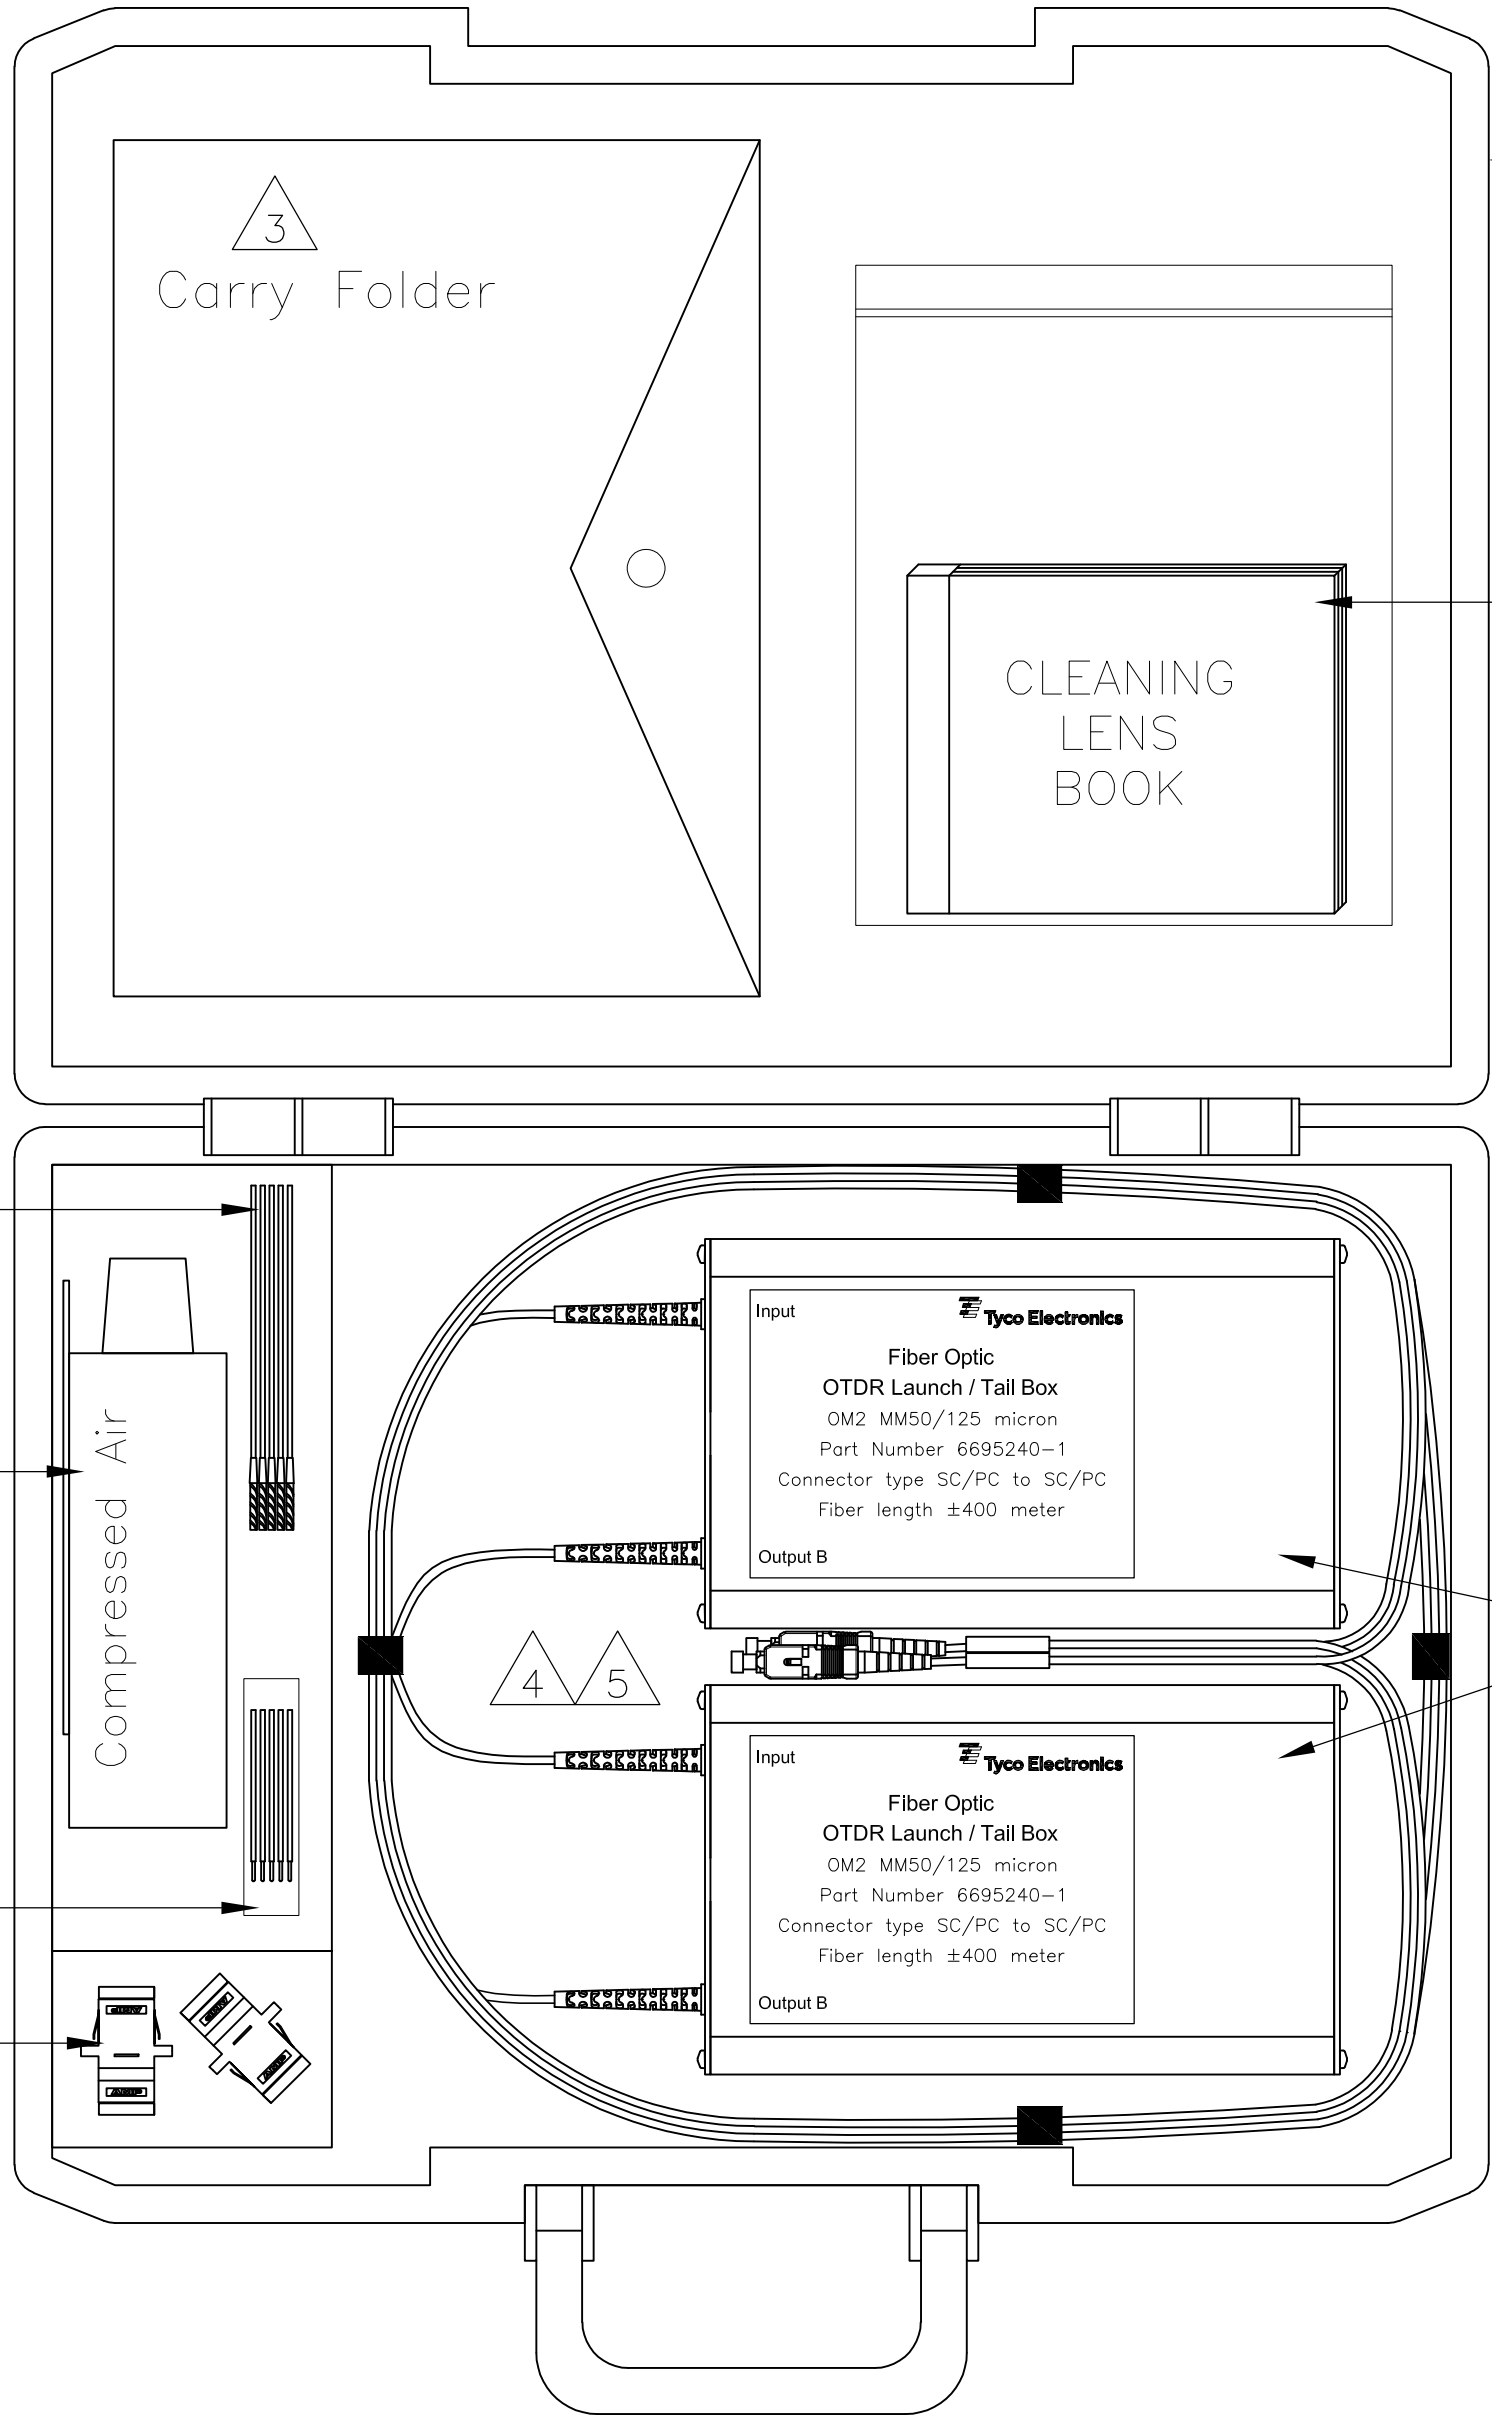

6695240-1 AS SHOWN



FOR CASES WITH MTRJ LEADS USE THIS LAY-OUT:

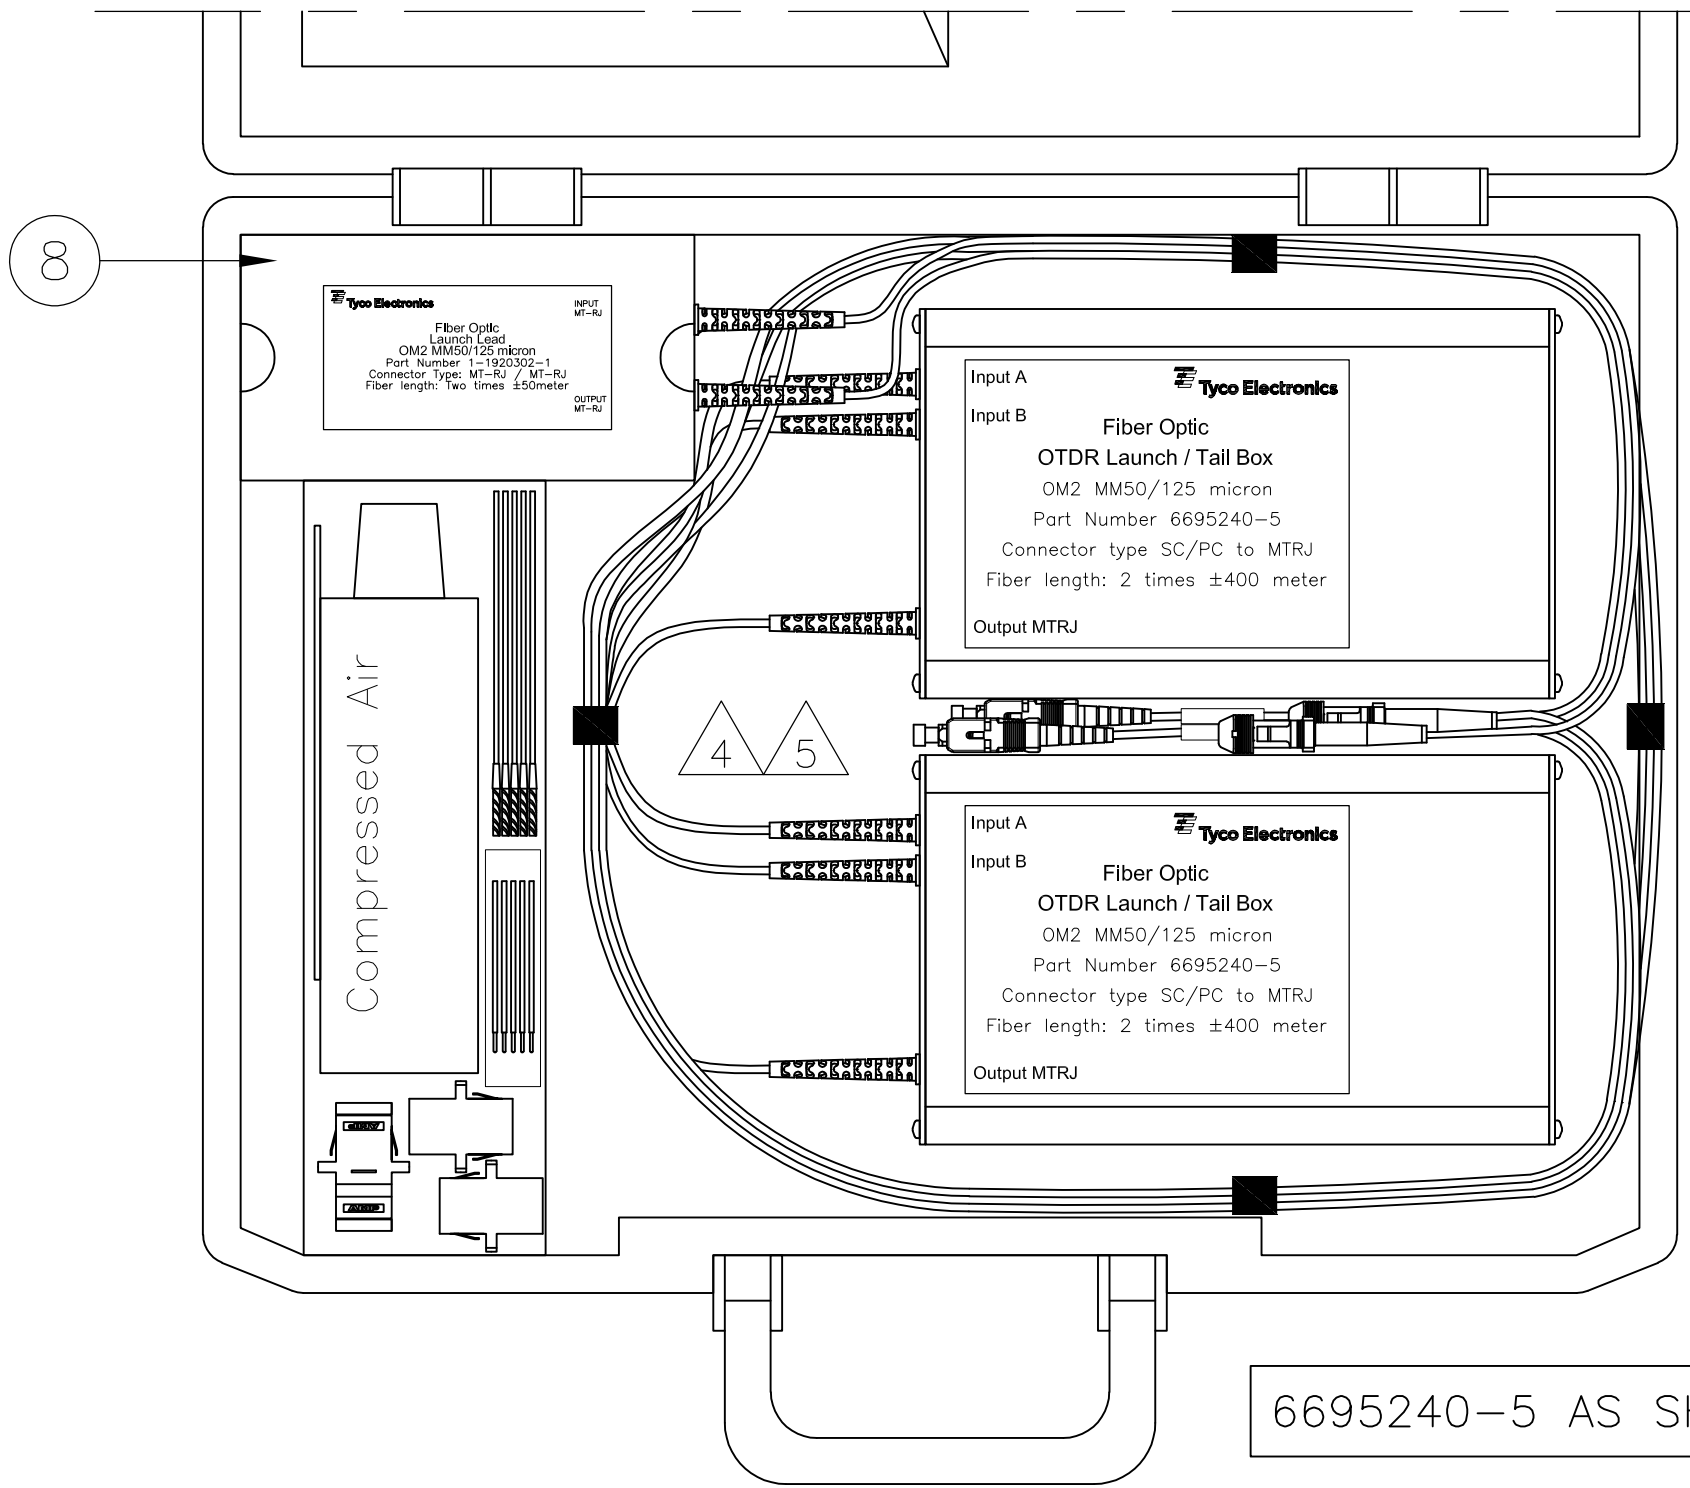

6695240-5 AS SHOWN

D

C

B

A

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 14NOV2006	Tyco Electronics Corporation 's-Hertogenbosch, Nederland			
DIMENSIONS: mm		CHK A. HENGELMOLEN 14NOV2006	NAME			
		APVD T. vd. MEULEN 14NOV2006	FOCASE MM 50/125 OM2 OTDR LAUNCH / TAIL CASE			
		PRODUCT SPEC	SIZE A2			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	CAGE CODE 00779		DRAWING NO C=6695240	RESTRICTED TO
MATERIAL		WEIGHT	SCALE NTS		SHEET 1 of 2	REV C
		CUSTOMER DRAWING				

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

H

DIST

—

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

—

SEE SHEET 1

—

—

—

MT–RJ CONNECTIVITY:

FOR ITEM 7:

OTDR

MTRJ

A

B

FOR ITEM 8:

MTRJ

MTRJ

A

B

9	RECEPTACLE MT–RJ	1278017–1					2					2					2					2
	RECEPTACLE FC/PC	5501506–1				2					2					2					2	1
	RECEPTACLE LC/PC	1374352–1			2					2					2		1			2		
	RECEPTACLE ST/PC	502750–2		2					2			1		2					2			
	RECEPTACLE SC/PC	6278348–4	2					1	2				2					2				

8	FOAC LEAD ASSEMBLY MTRJ–MTRJ MALE	1–1920302–1					1					1					1					1
7	FOAC OTDR BOX OM2 MTRJ	—					2					2					2					2
	FOAC OTDR BOX OM2 SINGLE CONNECTOR	—	2	2	2	2		2	2	2	2		2	2	2	2		2	2	2	2	

6	CLEANING STICK MTRJ	1391089–1					10					10					10					10
5	CLEANING STICK 1,25mm	233069–2			10					10			10	10	10	10	10			10		
4	CLEANING STICK 2,5mm	233069–1	10	10		10	10	10	10		10	10	10	10		10		10	10		10	10
3	FOAC COMPRESSED AIR SPRAY	1206860–1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
2	CLEANING LENS BOOK	434376–1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
1	FOAC MOLDED CASE	—	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Item	Description	Part Number	Quantity																			
			CONNECTOR	— LINK SC/PC	— LINK ST/PC	— LINK LC/PC	— LINK FC/PC	— LINK MT–RJ	— LINK SC/PC	— LINK ST/PC	— LINK LC/PC	— LINK FC/PC	— LINK MT–RJ	— LINK SC/PC	— LINK ST/PC	— LINK LC/PC	— LINK FC/PC	— LINK MT–RJ	— LINK SC/PC	— LINK ST/PC	— LINK LC/PC	— LINK FC/PC
				6695240–1	6695240–2	6695240–3	6695240–4	6695240–5	6695240–6	6695240–7	6695240–8	6695240–9	1–6695240–0	1–6695240–1	1–6695240–2	1–6695240–3	1–6695240–4	1–6695240–5	1–6695240–6	1–6695240–7	1–6695240–8	1–6695240–9
																						2–6695240–0

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC

1 PLC

2 PLC

3 PLC

4 PLC

ANGLES

FINISH

±

–

±

–

±

–

±

–

±

–

DWN

R. COOLEN

06JUN2006

CHK

A. HENGELMOLEN

14NOV2006

APVD

T. vd. MEULEN

14NOV2006

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

—

CUSTOMER DRAWING

Tyco Electronics

Tyco Electronics Corporation

's–Hertogenbosch, Nederland

NAME

FOCASE MM 50/125 OM2

OTDR LAUNCH / TAIL CASE

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=6695240

RESTRICTED TO

—

SCALE

NTS

SHEET

2 of 2

REV

C

NOTES:

1

ALL CONNECTOR TYPES HAVE CONTROLLED END FACE

– ATTENUATION MEASURED AGAINST REF. CONN. AT 850nm ≤ 0,28dB (FOR SC 0,23dB)

– RETURN LOSS ≥ 35dB (FOR MTRJ ≥ 25dB), MEASURED IN MATED CONDITION AT 850nm

2

THE CASE IS DESIGNED FOR MEASUREMENTS TO BE PERFORMED ACCORDING TO ISO/IEC 14763–3

3

CARRY FOLDER PACKED IN THE CASE CONTAINS:

– ALL MEASUREMENT DATA SHEETS

– CONNECTOR ENDFACE GEOMETRY DOCUMENTS

– MANUAL 412–19084 FOR CLEANING AND CORRECT USE OF TEST LEADS AND MEASUREMENTS

4

MINIMUM BEND RADIUS FOR TEST: 25mm

5

MINIMUM BEND RADIUS FOR STORAGE: 25mm

AMP 1471–9 REV 31MAR2000