
FEATURES:

- 12 OR 24 VOLTS DC OPERATION
- 96 WATT HANDLING CAPABILITY AT 12V
- 196 WATT HANDLING CAPABILITY AT 24V
- WIDE SENSOR FIELD OF VIEW




	REV.	DESCRIPTION/ECO NO.	DATE		
		RELEASED	9/30/13		
	Α	CHANGE DIMENSION 89.0 TO 64.0	10/24/13		
l					
1					

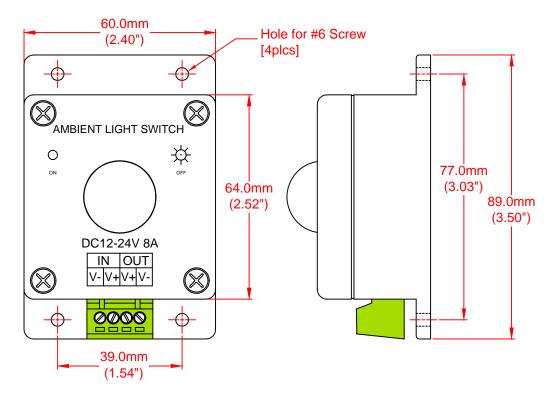

RATINGS

CHARACTERISTICS	UNIT	MINIMUM	MAXIMUM	
Input Voltage	Volts DC	Volts DC 12		
Load Current	Amps	8	8	
Operating Temperature	Degrees C	-20	60	
Trigger Range ON	Lux	85		
Trigger Range OFF	Lux		215	



JKL PART NO.: ZCTR-04

METRIC	DIMENSION IN mm (INC		T	KI	CON	IDONE	NITC	CORPO	AD A TI	ON
THIRD ANGLE PROJECTION	TOLERANCE OTHERWISE S 1 PL +/- 2 PL +/- ANGLE +/-	REF. REF.	TITLE					R SWI		ION
DRAWN BY L. WENGSTROM	APPV'D BY L.R.	DATE 9/30/13	SIZE	FSCM NO. 55335	DRAWING NO.	3	ZCT	R-04		
- CAD D MANUAL REVISION	SCALE NOT T		RELEASED DATE	9/30/13	REVISION DATE		NO. A	SHEET 1 OF 1		