


# ExaMAX<sup>®</sup>



EPTS-2-P-D-RA-04



EPTT-2-P-11.5-D-RA

(2.00 mm) .0787"

EPTT, EPTS SERIES

# ExaMAX<sup>®</sup> POWER MODULES

Mates with:  
EPTS

## SPECIFICATIONS


For complete specifications see [www.samtec.com?EPTT](http://www.samtec.com?EPTT)

**Insulator Material:**  
Black LCP  
**Contact Material:**  
Copper Alloy  
**Current Rating:**  
14.8 A per pin  
(2 pins powered)

**Note:**  
Some sizes, styles and options are non-standard, non-returnable.

<b>EPTT</b>	<b>POSITIONS PER ROW</b>	<b>PLATING OPTION</b>	<b>HEIGHT</b>	<b>D</b>	<b>RA</b>
	<b>-2</b> = 4 Positions	<b>-P</b> = Palladium with flash Gold on contacts, Matte Tin on tails	<b>-11.5</b> = (11.50 mm) .453" Height		

## APPLICATION

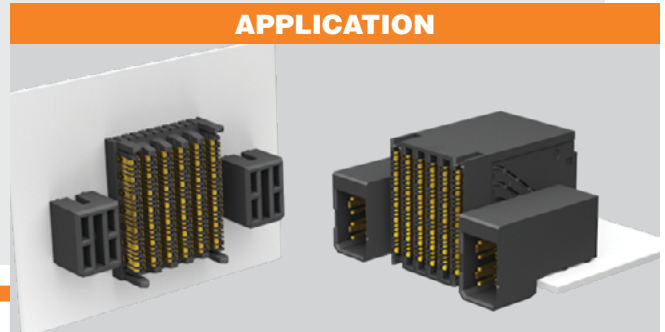

Mates with:  
EPTT

## SPECIFICATIONS

For complete specifications see [www.samtec.com?EPTS](http://www.samtec.com?EPTS)

**Insulator Material:**  
Vectra E130i  
**Terminal Material:**  
Phosphor Bronze  
**Current Rating:**  
14.8 A per pin  
(2 pins powered)

PIN STAGING	LENGTH CALLOUT ("X" = SETBACK DIM.)			
	POS. 1	POS. 2	POS. 3	POS. 4
-01	1.10	1.10	1.10	1.10
-02	1.10	1.10	2.60	2.60
-03	1.10	2.60	2.60	1.10
-04	1.10	2.60	2.60	2.60
-05	2.60	2.60	2.60	1.10
-06	2.60	2.60	2.60	2.60

**Notes:**  
Some lengths, styles and options are non-standard, non-returnable.

ExaMAX<sup>®</sup> is a registered trademark of AFCL.

<b>EPTS</b>	<b>POSITIONS PER ROW</b>	<b>PLATING OPTION</b>	<b>D</b>	<b>ORIENTATION</b>	<b>PIN STAGING</b>
	<b>-2</b> = 4 Positions	<b>-P</b> = Palladium with flash Gold on contacts, Matte Tin on tails		<b>-VT</b> = Vertical <b>-RA</b> = Right-angle	<b>-01 thru -06</b> (See chart) (-RA available with -04 only)

**EPTS-2-P-D-VT-04 SHOWN**

**EPTS-2-P-D-RA-04 SHOWN**

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

All parts within this catalog are built to Samtec's specifications. Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.